

April 11, 2012

STATE OF RHODE ISLAND AND PROVIDENCE PLANTATION
DEPARTMENT OF TRANSPORTATION
RHODE ISLAND CONTRACT NO.2012-CB-046
FEDERAL-AID PROJECT NO. FAP Nos: BRO-0200(007)

Washington #200 - Pedestrian Bridge & Warren Avenue Bridge #464

Gano Street (Providence) to Warren Avenue (East Providence)
CITY/TOWN OF East Providence, Providence
COUNTY OF PROVIDENCE

NOTICE TO PROSPECTIVE BIDDERS

ADDENDUM NO. 6 Prospective bidders and all concerned are hereby notified of the following changes in the Plans, Specifications, Proposal and Distribution of Quantities for this contract. These changes shall be incorporated in the Plans, Specifications, Proposal and Distribution of Quantities, and shall become an integral part of the Contract Documents.

A. Drawings/Plans - Change/Addition

1. SET 3 SHEET 39 - WEST ABUTMENT PLAN AND ELEVATION

Modify the plan as shown on Sketch 3-1 attached to this Addendum No. 6. The plan has been revised.

2. SET 3 SHEET 77- PLAZA SPAN DECK DETAILS

Modify the plan as shown on Sketch 3-2 and Sketch 3-3 attached to this Addendum No. 6. The plan has been revised.

B. General Provisions-Job Specific

1. CODE 808.9904 CONCRETE SUBSTRUCTURE CLASS MC ABUTMENT FOOTINGS

Delete page JS-121 (R-1) in its entirety and replace it with page JS-121 (R-2) attached to this Addendum No. 6. The item has been deleted.

C. Distribution of Quantities

1. INDEX

Delete pages 1 (R-2) to 8 (R-2) in their entirety and replace them with pages 1 (R-3) to 8 (R-3) attached to this Addendum No. 6. The index has been revised.

2. CODE 808.9902 CONCRETE SUBSTRUCTURE CLASS XX PARAPETS - WASHINGTON PEDESTRIAN BRIDGE

Delete page 29 in its entirety and replace it with page 29 (R-1) and add page 29a attached to this Addendum No. 6. The west abutment median wall locations have been clarified.

3. CODE 808.9904 CONCRETE SUBSTRUCTURE CLASS MC ABUTMENT FOOTINGS, CODE 808.9905 CONCRETE SUBSTRUCTURE CLASS MC WALL FOOTINGS and CODE 808.9906 CONCRETE SUBSTRUCTURE CLASS MC WALL STEMS

Delete page 30 in its entirety and replace it with page 30 (R-1) and add page 30a attached to this Addendum No. 6. Code 808.9904 has been deleted. The west abutment median wall locations have been clarified.



RI Department of Transportation
Chief Engineer

NOTES:

1. WEST ABUTMENT MEDIAN WALL FOOTING SHALL BE PAID FOR UNDER ITEM CODE 808.9905 "CONCRETE SUBSTRUCTURE CLASS MC WALL FOOTINGS".
2. WEST ABUTMENT MEDIAN WALL STEM FROM THE TOP OF FOOTING TO THE BOTTOM OF THE PARAPET (AND TO BOTTOM OF THE PLANTER WALL) SHALL BE PAID FOR UNDER ITEM CODE 808.9906 "CONCRETE SUBSTRUCTURE CLASS MC WALL STEMS".
3. THE PARAPET WALL, PLANTER WALL AND CLOSURE WALL ON THE WEST ABUTMENT MEDIAN WALL SHALL BE PAID FOR UNDER ITEM CODE 808.9902 "CONCRETE SUBSTRUCTURE CLASS XX PARAPETS – WASHINGTON PEDESTRIAN BRIDGE".



VANASSE HANGEN BRUSTLIN, INC.
TRANSPORTATION LAND DEVELOPMENT
ENVIRONMENTAL SERVICES
PROVIDENCE, RHODE ISLAND

**REVISION TO
WEST ABUTMENT
PLAN AND ELEVATION**

**RL CONTACT
NO.**

2012-CB-046

SKETCH NO.

3-1

APRIL 11, 2012

ADDENDUM NUMBER 6

REVISION TO SHEET NO. 39

HT POLE

11'-4" MAX.
MEDIAN

CUT LINE

FOR ANCHORAGE
SEE ARCH SPAN DECK
DETAILS 2 SHEET

CONCRETE SIDEWALK
(STAMPED AND COLORED)

PEDESTAL

5
—
DETAIL

8-#6 L

2-#4 E.F.

#5@12" 8'-0" LONG
#5@12" (TYP.)

LOW POINT

RIC CONDUIT

7" EXIST. CONC. DECK
2%

2%

2%

1'-9" LAP
(TYP.)

G-4

EXIST. REINF.
TO REMAIN

G-5

CUT LINE


3'-5"

CUT LINE

AL DECK REINFORCING

SECTION

SCALE: 1/2"=1'-0"



VANASSE HANGEN BRUSTLIN, INC.
TRANSPORTATION LAND DEVELOPMENT
ENVIRONMENTAL SERVICES
PROVIDENCE, RHODE ISLAND

**REVISION TO
PLAZA SPANS
DECK DETAILS 3**

RL CONTACT
NO.

2012-CB-046


SKETCH NO.

3-2

APRIL 11, 2012

ADDENDUM NUMBER 6

REVISION TO SHEET NO. 77

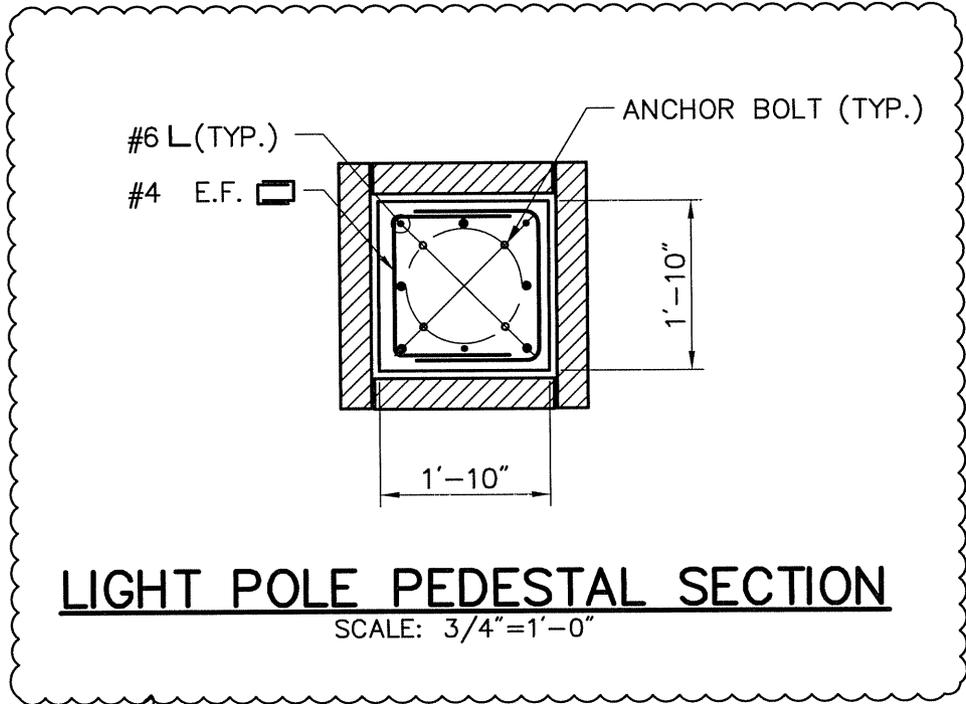

LIGHT POLE PEDESTAL SECTION
 SCALE: 3/4" = 1'-0"

(2)

<p>VANASSE HANGEN BRUSTLIN, INC. TRANSPORTATION LAND DEVELOPMENT ENVIRONMENTAL SERVICES PROVIDENCE, RHODE ISLAND</p>	<p>REVISION TO PLAZA SPANS DECK DETAILS 3</p>	<p>RL CONTACT NO. 2012-CB-046</p>	<p>SKETCH NO. 3-3</p>
<p>APRIL 11, 2012</p>	<p>ADDENDUM NUMBER 6</p>	<p>REVISION TO SHEET NO. 77</p>	

**CODE 808.9901
CONCRETE SUBSTRUCTURE CLASS HP END POSTS**

**CODE 808.9902
CONCRETE SUBSTRUCTURE CLASS XX PARAPETS -WASHINGTON PEDESTRIAN BRIDGE**

**CODE 808.9905
CONCRETE SUBSTRUCTURE CLASS MC WALL FOOTING**

**CODE 808.9906
CONCRETE SUBSTRUCTURE CLASS MC WALL STEMS**

**CODE 808.9907
CONCRETE SUBSTRUCTURE CLASS HP WALL STEMS**

**CODE 808.9908
CONCRETE SUBSTRUCTURE CLASS HP ABUTMENT STEMS**

**CODE 808.9909
CONCRETE SUBSTRUCTURE CLASS MC PIER STEMS**

**CODE 808.9910
CONCRETE SUBSTRUCTURE CLASS HP GIRDER PEDESTALS**

**CODE 808.9911
CONCRETE SUBSTRUCTURE CLASS HP SPANDREL COLUMNS**

**CODE 808.9912
CONCRETE SUBSTRUCTURE CLASS HP BACKWALLS**

**CODE 808.9913
CONCRETE SUBSTRUCTURE CLASS HP BASE CAPS FOR EXISTING PIERS**

**CODE 808.9914
CONCRETE SUBSTRUCTURE CLASS HP END CAPS FOR EXISTING ARCH BASES**

**CODE 808.9930
CONCRETE SUBSTRUCTURE CLASS MC PIERS COLUMNS AND CAPS**

**CODE 808.9940
CONCRETE SUPERSTRUCTURE CLASS HP PARAPETS**

Concrete substructure for the above items shall conform to all the applicable sections of the Rhode Island Standard Specifications for Road and Bridge Construction, Amended December 2010, all applicable compilations of approved specifications and as modified in the revised Sections 601 and 607 included in the Job Specific Specifications of the Contract documents.

Table of Contents - Distribution of Quantities

Project Name - Washington #200 - Pedestrian Bridge & Warren Avenue Bridge #464
 Estimate Name - Addendum No. 6
 R.I. Contract No. - 2012-CB-046
 FAP Nos: BRO-0200(007)

<u>ItemCode</u>	<u>Description</u>	<u>Page</u>
201.0301	CUTTING AND DISPOSING ISOLATED TREES AND STUMPS (4"- 24")	1
201.0302	CUTTING AND DISPOSING ISOLATED TREES AND STUMPS (24'' OR PLUS)	1
201.0321	CLEARING AND GRUBBING	1
201.0401	REMOVE AND DISPOSE GRANITE CURB	1
201.0403	REMOVE AND DISPOSE SIDEWALKS	2
201.0409	REMOVE AND DISPOSE FLEXIBLE PAVEMENT	2
201.0410	REMOVE AND DISPOSE CATCH BASINS	3
201.0414	REMOVE AND DISPOSE PIPE - ALL SIZES	3
201.0415	REMOVE AND DISPOSE GUARDRAIL AND POST ALL TYPES	3
201.0419	REMOVE AND DISPOSE FENCE	4
201.0423	REMOVE AND DISPOSE HANDHOLE	4
201.0424	REMOVE AND DISPOSE RETAINING WALL	4
201.0428	REMOVE AND DISPOSE FRAME AND GRATE OR FRAME AND COVER	5
201.0616	REMOVE AND DISPOSE LIGHT STANDARD FOUNDATIONS	5
201.9901	REMOVE AND DISPOSE CAST IRON HANDHOLE	5
201.9902	REMOVE AND DISPOSE CIRCUIT CONDUCTORS	5
201.9907	REMOVE AND DISPOSE BENCH	5
201.9910	REMOVE AND DISPOSE LUMINAIRE & STOCKPILE ALUMINUM STANDARDS	6
202.0100	EARTH EXCAVATION	6
202.0700	COMMON BORROW	6
203.0100	STRUCTURAL EXCAVATION EARTH	6
203.0210	STRUCTURAL EXCAVATION ROCK	7
203.0530	DEWATERING	7
203.0600	FILL GRAVEL BORROW UNDER STRUCTURES	7
203.0700	PERVIOUS FILL	7
203.9901	GEOTEXTILE (HDPE GEOMEMBRANE)	8
204.0100	TRIMMING AND FINE GRADING	8
206.0208	REMOVAL OF BALED HAY EROSION CHECKS	9
206.0230	BALED HAY EROSION CHECK AND SILT FENCE COMBINED STANDARD 9.3.0	9
206.9902	PRE AND POST WATERWAY CONDITIONS SURVEY	9
206.9903	TEMPORARY TIMBER MATS WORK PROTECTION	9
212.2000	CLEANING AND MAINTENANCE OF EROSION CONTROLS	10
302.0100	GRAVEL BORROW SUBBASE COURSE	10
401.9901	MODIFIED CLASS 4.75 ASPHALT	11
401.9902	CLASS 12.5 ASPHALT	11
401.9903	MODIFIED CLASS 12.5 ASPHALT	11
401.9904	CLASS 19.0 ASPHALT	12
403.0300	ASPHALT EMULSION TACK COAT	12
501.9901	CONTINUOUSLY REINFORCED PORTLAND CEMENT CONCRETE PAVEMENT	12
601.0300	CLASS A PORTLAND CEMENT CONCRETE	13
603.1000	CONTROLLED LOW STRENGTH MATERIAL	13
603.9901	ENGINEERED LIGHTWEIGHT FILL	13
701.0412	REINFORCED CONCRETE PIPE M 170 CLASS III 12 INCH	13
702.0513	FRAME AND GRATE STANDARD 6.3.1	14
702.0543	GRANITE APRON STONE 38'' STANDARD 7.3.8	14
702.0703	CATCH BASIN TYPE 'F' ROUND STANDARD 3.4.2	14
707.0900	ADJUST MANHOLES TO GRADE	14
707.1000	ADJUST SANITARY MANHOLE	14
707.1100	ADJUST CATCH BASINS	15
708.9041	CLEANING CATCH BASINS ALL TYPES AND SIZES	15
711.0110	3'' PAVED WATERWAY CLASS I-1 STANDARD 8.4.0	15
711.0120	CEMENT CONCRETE WATERWAY	15

Table of Contents - Distribution of Quantities

Project Name - Washington #200 - Pedestrian Bridge & Warren Avenue Bridge #464

Estimate Name - Addendum No. 6

R.I. Contract No. - 2012-CB-046

FAP Nos: BRO-0200(007)

<u>ItemCode</u>	<u>Description</u>	<u>Page</u>
800.9901	FURNISH, FABRICATE, INSTALL, AND REMOVE TEMPORARY PROTECTIVE SHIELD	16
803.9901	SAW CUT EXISTING CONCRETE WALL	16
803.9902	PARTIAL REMOVAL AND DISPOSAL OF CONCRETE SUPERSTRUCTURE- VALLEY STREET BRIDGE NO. 462 DECK MILLING	16
803.9903	FULL DEPTH REMOVAL AND DISPOSAL OF BITUMINOUS PAVEMENT FROM CONCRETE BRIDGE DECKS	17
803.9904	REMOVE AND SALVAGE ALUMINUM BRIDGE RAIL	17
803.9905	REMOVE AND DISPOSE EXISTING CONCRETE SUPERSTRUCTURE - WASHINGTON BRIDGE NO. 200	17
803.9907	REMOVE AND DISPOSE EXISTING CONCRETE SUPERSTRUCTURE - WARREN AVENUE BRIDGE NO. 464	17
803.9908	REMOVE AND DISPOSE EXISTING STEEL BEARINGS	18
803.9910	REMOVE AND DISPOSE EXISTING TEMPORARY STEEL SHORING - WASHINGTON BRIDGE NO. 200	18
803.9911	REMOVE AND DISPOSE TEMPORARY PRECAST CONCRETE BARRIER	18
803.9912	REMOVE AND DISPOSE EXISTING CONCRETE SUBSTRUCTURE - WASHINGTON BRIDGE NO. 200	18
803.9914	REMOVE AND DISPOSE CONCRETE EXISTING SUBSTRUCTURE - WARREN AVENUE BRIDGE NO. 464	19
803.9915	REMOVE AND DISPOSE EXISTING TIMBER SHORING - WARREN AVENUE BRIDGE NO. 464	19
807.9901	CLEANING, REPOINTING, & GROUTING ASHLAR MASONRY	19
807.9902	REPOINTING, & GROUTING MACHINE-CUT MASONRY	20
807.9903	INSTALLATION OF STOCKPILED LARGE BASTION WITH GRANITE BENCH	20
807.9904	INSTALLATION OF STOCKPILED SMALL BASTION WITH GRANITE BENCH	21
807.9905	GRANITE BASE FOR DECORATIVE POLE/LUMINAIRE AT CENTER PLAZA	21
807.9906	PLANTER AND BENCH AT CENTER PLAZA SPAN	21
807.9907	PLANTER AT WALL AT CENTER PLAZA SPAN	21
807.9908	GRANITE PYLON	21
807.9909	GRANITE MEMORIAL WITH BRONZE PLAQUE	22
807.9910	INVENTORY, REMOVE, STOCKPILE AND RECONSTRUCTION OF GRANITE BASTION PARAPET - ROUND	22
807.9911	INVENTORY, REMOVE, STOCKPILE AND RECONSTRUCTION OF GRANITE BASTION PARAPET - RECTANGULAR	22
807.9912	SCREEN WALL GRANITE VENEER	22
808.0502	CONCRETE SUBSTRUCTURE CLASS XX 3/4" ABUT FOOTING	22
808.0504	CONCRETE SUBSTRUCTURE CLASS XX 3/4" WALL FOOTING	23
808.0508	CONCRETE SUBSTRUCTURE CLASS XX 3/4" APPROACH SLABS	23
808.0602	** ITEM DELETED **	23
808.1631	PREFORMED JOINT FILLER BITUMINOUS 1/4"	23
808.1640	PREFORMED POLYETHYLENE FOAM JOINT FILLER 1/2"	24
808.1642	PREFORMED POLYETHYLENE FOAM JOINT FILLER 1"	24
808.1646	PREFORMED POLYETHYLENE FOAM JOINT FILLER 2"	25
808.1650	MASTIC JOINT SEALER (1' X 1')	25
808.1670	POLYURETHANE JOINT SEALANT	25
808.1675	POLYURETHANE ELASTOMERIC JOINT SEALANT	26
808.1810	CONCRETE SURFACE FINISHING RUBBED REGULAR	27
808.9901	CONCRETE SUBSTRUCTURE CLASS HP END POSTS	29
808.9902	CONCRETE SUBSTRUCTURE CLASS XX PARAPETS - WASHINGTON PEDESTRIAN BRIDGE	29
808.9903	CONCRETE APPROACH SIDEWALK	29
808.9904	** ITEM DELETED **	30
808.9905	CONCRETE SUBSTRUCTURE CLASS MC WALL FOOTINGS	30

Table of Contents - Distribution of Quantities

Project Name - Washington #200 - Pedestrian Bridge & Warren Avenue Bridge #464
 Estimate Name - Addendum No. 6
 R.I. Contract No. - 2012-CB-046
 FAP Nos: BRO-0200(007)

ItemCode	Description	Page
808.9906	CONCRETE SUBSTRUCTURE CLASS MC WALL STEMS	30
808.9907	CONCRETE SUBSTRUCTURE CLASS HP WALL STEMS	30
808.9908	CONCRETE SUBSTRUCTURE CLASS HP ABUTMENT STEMS	30
808.9909	CONCRETE SUBSTRUCTURE CLASS MC PIER STEMS	31
808.9910	CONCRETE SUBSTRUCTURE CLASS HP GIRDER PEDESTALS	31
808.9911	CONCRETE SUBSTRUCTURE CLASS HP SPANDREL COLUMNS	31
808.9912	CONCRETE SUBSTRUCTURE CLASS HP BACKWALLS	32
808.9913	CONCRETE SUBSTRUCTURE CLASS HP BASE CAP FOR EXISTING PIERS	32
808.9914	CONCRETE SUBSTRUCTURE CLASS HP END CAP FOR EXISTING ARCH BASES	33
808.9915	CONCRETE SUPERSTRUCTURE CLASS HP BRIDGE DECKS	33
808.9916	CONCRETE SUPERSTRUCTURE CLASS XX PARAPETS	34
808.9917	CONCRETE BRIDGE SIDEWALK	35
808.9919	CONCRETE SUPERSTRUCTURE CLASS XX WALLS	36
808.9920	CONCRETE SUPERSTRUCTURE CLASS XX BASTION - MEDIAN	36
808.9921	CONCRETE SUPERSTRUCTURE CLASS XX BASTION - SOUTH PARAPET	36
808.9922	CLEAN AND RESEAL JOINT IN SLAB	36
808.9924	STAMPED FINISH TYPE 'A'	37
808.9925	STAMPED FINISH TYPE 'B'	37
808.9926	STAMPED FINISH TYPE 'C'	37
809.0821	PRESTRESSED CONCRETE BEAM TYPE 2 FURNISH FABRICATE & ERECT CLASS HP 3/4"	38
809.9902	PRECAST GLASS FIBER REINFORCED CONCRETE RECTANGULAR PANEL	38
809.9903	PRECAST GLASS FIBER REINFORCED CONCRETE REPRODUCTION PYLON	38
809.9904	REPLACEMENT OF STATE SHIELD	38
809.9905	PROTOTYPE STATE SHIELD	38
809.9906	CONCRETE SUPERSTRUCTURE CLASS HP 3/4" PRECAST CAP FOR SCREEN WALL	39
809.9907	CONCRETE SUPERSTRUCTURE CLASS HP 3/4" PRECAST SILL FOR SCREEN WALL	39
810.9901	GALVANIZED BAR REINFORCEMENT FOR STRUCTURES	39
810.9902	GALVANIZED SPIRALS FOR COLUMNS	40
811.9901	CORE AND SET WALL DRAIN 4-INCH DIAMETER	40
813.0400	RUBBERIZED ASPHALT LIQUID MEMBRANE (WATERPROOFING MEMBRANE)	40
817.9901	REPAIRS TO STRUCTURAL CONCRETE MASONRY (PNEUMATIC MORTAR)	40
817.9902	PNEUMATIC MORTAR REPAIRS TO EXISTING MORTAR COATING ON STRUCTURAL STEEL	41
817.9903	STRUCTURAL MASONRY CRACK REPAIRS PIER NO. 8	41
817.9904	REPAIRS TO CONCRETE MASONRY-ARCH TYPE 4	41
817.9905	REPAIRS TO CONCRETE MASONRY-ARCH TYPE 7	41
817.9906	REPAIRS TO STRUCTURAL CONCRETE MASONRY - ARCH TYPE 8	42
818.9901	PORTLAND CEMENT CONCRETE REPAIR - GANO STREET STAIRWAY	42
819.0800	DRILL AND GROUT REINFORCING DOWELS	42
819.9901	ADHESIVE ANCHOR FOR DOWEL BARS (5/8")	42
819.9903	ADHESIVE ANCHOR FOR DOWEL BAR (7/8")	43
819.9904	ADHESIVE ANCHOR FOR DOWEL BAR (1/4")	43
819.9905	ADHESIVE ANCHOR FOR DOWEL BARS (1")	43
819.9906	DRILL AND GROUT ANCHOR BOLTS	43
820.0110	CONCRETE SURFACE TREATMENT (PROTECTIVE COATING)	44
820.0200	HIGH PRESSURE WATER CLEANING OF CONCRETE SURFACES	44
820.9901	CONCRETE SURFACE TREATMENT PROTECTIVE COATING WITH COLOR TINT	44
820.9902	CLEAR CONCRETE PENETRATING SEALER	44
821.1690	SAW & SEALING JOINTS IN BITUMINOUS CONCRETE PAVEMENT	45
823.1750	** ITEM DELETED **	45

Table of Contents - Distribution of Quantities

Project Name - Washington #200 - Pedestrian Bridge & Warren Avenue Bridge #464
 Estimate Name - Addendum No. 6
 R.I. Contract No. - 2012-CB-046
 FAP Nos: BRO-0200(007)

ItemCode	Description	Page
823.1755	ASPHALTIC EXPANSION JOINT SYSTEM - MATERIALS AND WORKMANSHIP WARRANTY	45
823.1760	STRIP SEAL EXPANSION JOINT ASSEMBLIES	45
823.9901	SILCONE EXPANSION JOINT SYSTEM	45
824.0422	AASHTO M270 GRADE 50 STEEL FURNISH FAB. & ERECT BUILT UP SIMPLE SPANS	46
824.0610	WELDED STUD SHEAR CONNECTORS 7/8 INCH DIAMETER	46
824.9901	AASHTO M270 GRADE 50 STEEL FURNISH FAB. & ERECT ROLLED CURVED (SMALL RADIUS)	46
824.9902	REPAIRS TO STRUCTURAL STEEL	46
824.9903	TEMPORARY SHORING OF GIRDERS FOR BEARING REPLACEMENT -PIER 13 AND EAST ABUTMENT	46
824.9904	TEMPORARY JACKING OF GIRDERS FOR BEARING REPLACEMENT - PIER 13 AND EAST ABUTMENT	47
824.9905	REPLACEMENT OF STEEL DIAPHRAGMS	47
824.9906	LONGITUDINAL RESTRAINER -PIER 6B	47
824.9907	INSPECTION/ADJUSTMENT OF TEMPORARY SHORING AT COLUMN LINES 1 AND 10	47
824.9909	TEMPORARY SHORING FOR COLUMN REPLACEMENT, BEAM SHORING AND GANO STREET STAIRWAY REPAIRS	47
824.9910	FURNISH FABRICATE AND ERECT STRUCTURAL STEEL SUPPORT SYSTEM FOR GFRG GIRDER FASCIA	48
824.9911	FURNISH AND INSTALL UTILITY SUPPORT	48
825.8025	SURFACE PREPARATION TO SSPC-SP6 STANDARDS	48
825.8040	PAINTING EXISTING STRUCTURAL STEEL	48
825.8045	PAINTING STRUCTURAL STEEL	49
826.0100	CONTAINMENT, COLLECTION, STORAGE AND DISPOSAL OF DEBRIS AND SPENT MATERIALS	49
826.0200	PERSONNEL PROTECTION DURING PAINTING AND CLEANING OPERATIONS	49
826.9902	ASBESTOS ABATEMENT	49
826.9903	REMOVAL AND DISPOSAL OF PCB-IMPACTED CONCRETE	49
826.9907	MANAGEMENT OF PIGEON GUANO AND MIXED DEBRIS	50
828.0303	ELASTOMERIC BEARINGS LAMINATED	50
828.9901	ELASTOMERIC BEARINGS LAMINATED WASHINGTON PEDESTRIAN BRIDGE SPANS 6A AND 7A	50
828.9902	ELASTOMERIC BEARINGS LAMINATED WASHINGTON PEDESTRIAN BRIDGE SPAN 7	50
828.9903	ELASTOMERIC BEARINGS LAMINATED WASHINGTON PEDESTRIAN BRIDGE SPANS 14 AND 15	50
828.9904	ELASTOMERIC BEARINGS FOR CONCRETE STRINGERS	50
829.9901	REMOVAL OF EXISTNG BRIDGE DRAIN PIPES	51
829.9902	INSTALLATION OF PERMANENT DRAIN PIPE	51
829.9903	INSTALLATION OF DRAIN PIPES - 4 INCH DIAMETER	52
829.9904	INSTALLATION OF DRAIN TROUGHS	52
830.9901	BRONZE BRIDGE RAIL TYPE 1A	52
830.9903	STEEL FENCE TYPE 1C	52
830.9904	STEEL FENCE TYPE 1D	53
830.9905	STEEL RAILING INFILL PANELS - SWITCHBACK RAILING AT GANO STREET	53
830.9906	STEEL RAILING INFILL PANELS - STAIRWAY RAILING AT GANO STREET	53
832.8050	BRIDGE MINIMUM CLEARANCE SIGNS	53
832.8051	BRIDGE IDENTIFICATION SIGNS	54
833.0400	GRANITE IDENTIFICATION TABLETS	54
834.9901	SLOPE FACE GRANITE CURB STRAIGHT 6" X 6"	54

Table of Contents - Distribution of Quantities

Project Name - Washington #200 - Pedestrian Bridge & Warren Avenue Bridge #464
 Estimate Name - Addendum No. 6
 R.I. Contract No. - 2012-CB-046
 FAP Nos: BRO-0200(007)

ItemCode	Description	Page
834.9902	VERTICAL FACE GRANITE CURB CURVED 6" X 6"	54
834.9903	SLOPE FACE GRANITE TRANSITION CURB 6" X 6"	54
834.9904	VERTICAL FACE GRANITE CURB STRAIGHT 6" X 6"	55
835.0110	DECK SCUPPERS SINGLE	55
836.0100	STRUCTURAL CONCRETE CRACK REPAIR BY EPOXY-RESIN BASE ADHESIVE INJECTION	56
900.9901	RESTORATION OF OPERATOR'S HOUSE AND STORAGE ROOMS - PIERS 6 & 7 SOUTH SIDE	56
900.9902	ANTI-GRAFFITI COATING - MATERIAL ONLY	56
900.9903	ANTI-GRAFFITI COATING - APPLICATION ONLY	57
900.9904	ORNAMENTAL BRONZE METALWORK	58
900.9905	BIKE PATH DIRECTIONAL SIGN	59
901.0101	GUARDRAIL STEEL BEAM SINGLE FACE EARTH AND ASPHALT	59
901.0151	TERMINAL END SECTION SINGLE FACE STANDARD 34.3.2	59
901.0191	GUARDRAIL STEEL BEAM ANCHORAGE TRAILING END SECTION STANDARD 34.3.4	59
901.0196	GUARDRAIL CONNECTION TO EXISTING ENDPOST TRAILING END SECTION, STANDARD 34.3.6	60
901.0197	GUARDRAIL CONNECTION TO EXISTING ENDPOST APPROACH END SECTION, STANDARD 34.3.5	60
903.0206	CHAIN LINK FENCE 6' STD 31.2.0	60
903.0227	GATE, CHAIN LINK 6' STANDARD 31.2.0	60
904.9901	GRAPHIC PANELS	61
905.0110	PORTLAND CEMENT SIDEWALK MONOLITHIC STANDARD 43.1.0	61
905.0131	PORTLAND CEMENT CONCRETE MEDIAN 6' MONOLITHIC	61
906.0100	SLOPE FACED GRANITE CURB - QUARRY SPLIT STRAIGHT STANDARD 7.4.0	61
906.0101	SLOPE FACED GRANITE CURB - QUARRY SPLIT CIRCULAR STANDARD 7.4.0	62
906.0102	SLOPE FACED GRANITE TRANSITION CURB STANDARD 7.4.1	62
906.0103	GRANITE TRANSITION CURB VERTICAL FACE TO SLOPED FACE STANDARD 7.4.2	62
906.0110	GRANITE CURB, QUARRY SPLIT STRAIGHT, STANDARD 7.3.0	62
906.0111	GRANITE CURB, QUARRY SPLIT CIRCULAR, STANDARD 7.3.0	63
906.0700	REMOVE, HANDLE, HAUL TRIM RESET CURB EDGING, STRAIGHT, CIRCULAR ALL TYPES	63
906.0720	RESET STOCKPILE CURB STRAIGHT CIRCULAR CORNER RETURNS	63
906.9901	GRANITE TRANSITION CURB (SLOPED FACE TO BRIDGE SLOPED FACE)	63
906.9902	GRANITE TRANSITION CURB (BRIDGE SLOPED FACE TO FLUSH WITH PROPOSED GROUND)	64
907.0100	WATER FOR DUST CONTROL	64
914.5010	FLAGPERSONS	64
914.5020	FLAGPERSONS - OVERTIME	64
915.0240	REMOVE AND RESET HIGHWAY BOUNDS (ALL TYPES)	64
921.0100	SLOPE PAVING 16X8X4'	64
922.0100	TEMPORARY CONSTRUCTION SIGNS STANDARD 29.1.0 AND 27.1.1	65
923.0105	DRUM BARRICADE STANDARD 26.2.0	68
923.0200	FLUORESCENT TRAFFIC CONES STANDARD 26.1.0	68
924.0113	ADVANCE WARNING ARROW PANEL	69
926.0130	PRECAST MEDIAN BARRIER FOR TEMPORARY TRAFFIC CONTROL STANDARD 40.5.0	69
929.0110	FIELD OFFICE	69
931.9901	CLEANING AND SWEEPING OF PAVEMENT-BIKE LANES OF HENDERSON BRIDGE NO. 600 AND APPROACH	69
932.0100	CUTTING AND MATCHING ASPHALT	70

Table of Contents - Distribution of Quantities

Project Name - Washington #200 - Pedestrian Bridge & Warren Avenue Bridge #464
 Estimate Name - Addendum No. 6
 R.I. Contract No. - 2012-CB-046
 FAP Nos: BRO-0200(007)

ItemCode	Description	Page
932.0200	FULL-DEPTH SAWCUT OF BITUMINOUS PAVEMENT	70
932.0220	FULL DEPTH SAWCUT OF BITUMINOUS SIDEWALK/DRIVEWAY	70
932.0230	FULL DEPTH SAWCUT OF PORTLAND CEMENT CONCRETE SIDEWALK/DRIVEWAY	70
935.0400	REMOVING BITUMINOUS PAVEMENT BY MICRO MILLING	71
936.0110	MOBILIZATION	71
937.0200	MAINTENANCE AND MOVEMENT TRAFFIC PROTECTION	71
943.0200	TRAINEE MAN-HOURS	71
L01.0102	LOAM BORROW 4 INCHES DEEP	71
L01.9902	PLANTING MIX FOR PLANTERS AT CENTER PLAZA SPAN AND AT WALL	72
L02.0102	RESIDENTIAL SEEDING (TYPE 2)	72
L02.9901	GRASS MOWING (4,645 SQUARE YARDS)	73
L06.9901	ABIES CONCOLOR 6'-7' B&B	73
L06.9902	ACER FREEMANII 'AUTUMN BLAZE' 3"-3.5" CAL. B&B	73
L06.9903	MALUS 'LOUISA' 2"-2.5" CAL B&B	73
L06.9904	MALUS 'PRAIRIFIRE' 2"-2.5" CAL. B&B	73
L06.9905	PICEA PUNGENS 'GLAUCA', 6'-7' B&B	73
L06.9906	PRUNUS CERASIFERA 'THUNDERCLOUD' 2"-2.5" CAL. B&B	74
L06.9908	CALAMAGROSTIS ACUTIFLORA 'KARL FOERSTER', #2 CONT.	74
L06.9909	DROSANTHEMUM HISPIDUM 1 QT. CONT.	74
L06.9910	PENNISETUM ALOPECUROIDES 'MOUDRY', #1 CONT	74
L06.9911	SEDUM JAPONICUM 1 QT. CONT.	74
L06.9912	TALINUM CALYGINUM 1 QT. CONT.	74
L06.9913	QUERCUS ROBUR 'FASTIGIATA' 2.5"-3" CAL. B&B	75
L11.0102	TREE PLANT PROTECTION DEVICE STANDARD 51.1.0	75
L11.0104	DRIP-LINE TREE PROTECTION DEVICE STANDARD 51.1.1	75
L15.9901	ORNAMENTAL BENCH	76
L15.9902	ORNAMENTAL BOLLARD AND CHAIN	76
L15.9903	ORNAMENTAL BOLLARD	76
L15.9904	ORNAMENTAL BIKE RACK	77
T04.5001	6 AWG SINGLE CONDUCTOR CABLE 600V INSULATION	77
T04.5302	14 AWG 2 CONDUCTOR TWISTED SHIELDED CABLE	77
T04.5305	14 AWG 5 CONDUCTOR CABLE	77
T04.6902	'2' STRANDED COPPER CONDUCTOR 600V INSULATION	77
T04.6906	'6' STRANDED COPPER CONDUCTOR 600V INSULATION	78
T04.6908	'8' STRANDED COPPER CONDUCTOR 600V INSULATION	78
T04.6910	'10' STRANDED COPPER CONDUCTOR 600V INSULATION	78
T04.7300	IN-LINE FUSED DISCONNECT DEVICE WITH FUSE WEATHERPROOF	78
T04.7400	IN-LINE UNFUSED DISCONNECT DEVICE	79
T04.9901	PRE-MOLDED SPLICES 2, 3 AND 4-WAY SPLICES	79
T04.9902	FUSED AND UNFUSED PREMOLDED Y - CONNECTORS	79
T04.9903	FURNISH & INSTALL POWER AND LIGHTING SYSTEMS IN OPERATOR'S HOUSE AND STORAGE ROOM	79
T04.9911	72 STRAND FIBER OPTIC CABLE	79
T04.9912	12 STRAND FIBER OPTIC CABLE	80
T05.0100	PRECAST TYPE A HANDHOLE STANDARD 18.2.0	80
T05.0200	PRECAST TYPE H HEAVY DUTY HANDHOLE STANDARD 18.2.1	80
T05.0300	PRECAST TYPE B HEAVY DUTY HANDHOLE STANDARD 18.2.2	80
T05.0310	PULL BOX ON STRUCTURE TYPE W STANDARD 18.6.3	81
T05.0400	BREAK INTO EXISTING HANDHOLE	81
T05.9901	JUNCTION BOXES (COMMUNICATION SYSTEM)	81
T05.9902	TYPE 'V' PULL BOX WITHIN STRUCTURE	81
T05.9911	BREAK INTO EXISTING PULL BOX-WALL MOUNTED	81
T06.1020	2 IN. RIGID STEEL CONDUIT - UNDERGROUND	81
T06.2020	2 IN. RIGID STEEL CONDUIT-OVERHEAD	82
T06.2030	3 IN. RIGID STEEL CONDUIT-OVERHEAD	82

Table of Contents - Distribution of Quantities

Project Name - Washington #200 - Pedestrian Bridge & Warren Avenue Bridge #464
 Estimate Name - Addendum No. 6
 R.I. Contract No. - 2012-CB-046
 FAP Nos: BRO-0200(007)

ItemCode	Description	Page
T06.4010	1 IN. RIGID STEEL CONDUIT IN STRUCTURE	82
T06.4020	2 IN. RIGID STEEL CONDUIT IN STRUCTURE	82
T06.5120	2 INCH SCHEDULE 40 POLYVINYL CHLORIDE PLASTIC CONDUIT - UNDERGROUND	82
T06.5130	3 INCH SCHEDULE 40 POLYVINYL CHLORIDE PLASTIC CONDUIT - UNDERGROUND	83
T06.7033	EXPANSION COUPLING WITH TRANSVERSE MOTION 3" FIBERGLASS	83
T06.7043	EXPANSION COUPLING WITH TRANSVERSE MOTION 3" PVC	83
T06.7102	EXPANSION COUPLING WITHOUT TRANSVERSE MOTION 2" STEEL	83
T06.7122	EXPANSION COUPLING WITHOUT TRANSVERSE MOTION 2" FIBERGLASS	83
T06.9901	2 INCH POLYVINYLCHLORIDE PLASTIC CONDUIT UNDER DECK	84
T06.9907	4" FIBERGLASS CONDUIT - OVERHEAD (4 CONDUITS)	84
T06.9908	3" PVC CONDUIT SCHEDULE 40 WITHIN BRIDGE STRUCTURE	84
T06.9909	4" FIBERGLASS CONDUIT - OVERHEAD (SINGLE CONDUIT)	84
T06.9912	4 INCH HDPE CONDUIT-UNDER EXISTING PAVEMENT BY DIRECTIONAL BORING	84
T06.9913	4 INCH HDPE CONDUIT - UNDERGROUND	85
T06.9914	4 INCH HDPE CONDUIT - UNDERGROUND (4 CONDUITS)	85
T07.1250	FURNISH AND INSTALL 250 WATT HIGH PRESSURE SODIUM LUMINAIRE	85
T07.9901	GENERAL HIGHWAY LIGHTING - 250 WATT HIGH PRESSURE SODIUM - CUTOFF LUMINAIRE	85
T07.9903	DECORATIVE POLE / LUMINAIRE - SINGLE 100 WATT H.P.S.	86
T07.9904	DECORATIVE POLE / LUMINAIRE - DOUBLE 100 WATT HPS	86
T08.0200	LIGHT STANDARD ANCHORAGES ON BRIDGES	86
T08.1700	REMOVE AND RELOCATE LIGHT STANDARD	86
T08.2031	ALUMINUM LIGHTING STD. 30 FT. W/ SINGLE DAVIT ARM EXTN. 10 FT. STANDARD 18.3.0	86
T08.9904	DECORATIVE POLE ANCHORAGE ON PEDESTRIAN BRIDGE	86
T08.9905	DECORATIVE POLE FOUNDATION W/ BOLTS	87
T08.9907	NAVIGATIONAL CHANNEL LIGHTING SYSTEMS	87
T08.9908	PEDESTRIAN STAIRS AND BICYCLE RAMP LIGHTING SYSTEMS	87
T11.6006	SPAN AND MESSENGER WIRES 6/16	87
T11.9901	TRAFFIC SIGNAL WOOD SPAN POLE, 40 FOOT, CLASS I	87
T12.9150	METER SOCKET W/MANUAL BY-PASS	88
T12.9901	MAINTENANCE OF TRAFFIC SIGNAL SYSTEMS	88
T12.9911	FIBER ETHERNET SWITCH	88
T12.9912	SPLICE ENCLOSURE, 96 POSITION	88
T12.9913	PATCH PANEL, 12 POSITION	88
T13.1000	TRAFFIC DETECTORS-LOOP, STANDARD 19.6.0	88
T13.1004	TRAFFIC DETECTOR RELAY-LOOP 4 CHANNEL	89
T14.3613	1 WAY 3 SECTION BRACKET MOUNTED SIGNAL HEAD 12 INCH	89
T15.0100	DIRECTIONAL REGULATORY AND WARNING SIGNS	89
T15.2000	PARKING SIGNS	90
T16.0100	GROUND MOUNTED PRIMARY DIRECTIONAL SIGN PANELS EXTRUDED ALUMINUM	90
T17.9950	OVERHEAD SIGN COVERS	91
T20.1000	REMOVE EXISTING PAVEMENT MARKINGS	91
T20.2006	6 INCH EPOXY RESIN PAVEMENT MARKINGS WHITE	91
T20.2012	12 INCH EPOXY RESIN PAVEMENT MARKINGS WHITE	92
T20.2014	4 INCH EPOXY RESIN PAVEMENT MARKINGS YELLOW	92
T20.2016	6 INCH EPOXY RESIN PAVEMENT MARKINGS YELLOW	92
T20.2022	EPOXY RESIN PAVEMENT MARKING WORD "ONLY" STANDARD 20.1.0	93
T20.9901	EPOXY RESIN PAVEMENT MARKING - HELMETED BICYCLIST SYMBOL WITH ARROW	93
T20.9902	EPOXY RESIN PAVEMENT MARKING - PEDESTRIAN SYMBOL	93

Table of Contents - Distribution of Quantities

Project Name - Washington #200 - Pedestrian Bridge & Warren Avenue Bridge #464

Estimate Name - Addendum No. 6

R.I. Contract No. - 2012-CB-046

FAP Nos: BRO-0200(007)

<u>ItemCode</u>	<u>Description</u>	<u>Page</u>
T20.9903	EPOXY RESIN PAVEMENT MARKING WORD "XING" STANDARD 20.1.0	94
T20.9904	EPOXY RESIN PAVEMENT MARKING WORD "SLOW" STANDARD 20.1.0	94
T20.9905	EPOXY RESIN PAVEMENT MARKING WORD "AHEAD" STANDARDS 20.1.0	94
T20.9906	EPOXY RESIN PAVEMENT MARKING WORD "EXIT" STANDARD 20.1.0	95
T20.9907	EPOXY RESIN PAVEMENT MARKING WORD :STOP" STANDARD 20.1.0	95
808.9930	CONCRETE SUBSTRUCTURE CLASS MC PIRES COLUMNS AND CAPS	95
808.9940	CONCRETE SUPERSTRUCTURE CLASS HP PARAPETS	95
T12.0004	ACTUATED CONTROLLER TS-2, TYPE 1 W/4 PHASE ASSEMBLY POLE MOUNTED INCLUDING CABINET STD. 19.1.1	95
807.9913	CLEANINIG MACHINE-CUT MASONRY	96
826.9908	MANAGEMENT OF PIGEON GUANO AND MIXED DEBRIS-OPERATOR'S HOUSE AND STORAGE ROOMS	96

Distribution of Quantities

Project Name - Washington #200 - Pedestrian Bridge & Warren Avenue Bridge #464
 Estimate Name - Addendum No. 6
 R.I. Contract No. - 2012-CB-046
 FAP Nos: BRO-0200(007)

<u>Item No.</u>	<u>Item Code</u>	<u>Description</u>	<u>UM</u>	<u>Qty.</u>	<u>Pay Code</u>	<u>Seq. No.</u>
089	808.1810 Cont.	WEST ABUTMENT		1,251.00	0011	01
		WARREN AVENUE BRIDGE NO. 464				
		(PARAPETS)				
		BRIDGE PARAPET		2,210.00	0011	01
		ENDPOST		370.00	0011	01
		NORTH ABUTMENT		338.00	0011	01
		NORTH PIER		955.00	0011	01
		SOUTH ABUTMENT		279.00	0011	01
		SOUTH PIER		927.00	0011	01
Item 808.1810 Total:				60,934.00		
090	808.9901	CONCRETE SUBSTRUCTURE CLASS HP END	CY			
		POSTS				
		WARREN AVENUE BRIDGE NO. 464				
		PARAPET-END POST		6.00	0011	01
Item 808.9901 Total:				6.00		
091	808.9902	CONCRETE SUBSTRUCTURE CLASS XX	CY			
		PARAPETS - WASHINGTON PEDESTRIAN				
		BRIDGE				
		PEDESTRIAN BRIDGE				
		NE PARAPET WALL		4.00	0011	01
		NW PARAPET WALL, PARAPET ON		44.00	0011	01
		WEST ABUTMENT MEDIAN,				
		PLANTER WALL ON WEST				
		ABUTMENT MEDIAN, CLOSURE				
		WALL ON WEST ABUTMENT MEDIAN				
		SE PARAPET WALL		23.00	0011	01
		SW PARAPET WALL		26.00	0011	01
Item 808.9902 Total:				97.00		
092	808.9903	CONCRETE APPROACH SIDEWALK	CY			
		PEDESTRIAN BRIDGE				

Distribution of Quantities

Project Name - Washington #200 - Pedestrian Bridge & Warren Avenue Bridge #464
 Estimate Name - Addendum No. 6
 R.I. Contract No. - 2012-CB-046
 FAP Nos: BRO-0200(007)

<u>Item</u> <u>No.</u>	<u>Item Code</u>	<u>Description</u>	<u>UM</u>	<u>Qty.</u>	<u>Pay</u> <u>Code</u>	<u>Seq.</u> <u>No.</u>
092	808.9903 Cont.	EAST APPROACH MEDIAN AND PEDESTRIAN PATH		20.00	0011	01
		WARREN AVE UNDER BENCHES		1.00	0011	01
		WEST APPROACH MEDIAN AND		21.00	0011	01

Distribution of Quantities

Project Name - Washington #200 - Pedestrian Bridge & Warren Avenue Bridge #464
 Estimate Name - Addendum No. 6
 R.I. Contract No. - 2012-CB-046
 FAP Nos: BRO-0200(007)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
092	808.9903 Cont.	PEDESTRIAN PATH				
				Item 808.9903 Total:	42.00	
094	808.9905	CONCRETE SUBSTRUCTURE CLASS MC WALL FOOTINGS PEDESTRIAN BRIDGE MEDIAN WALL FOOTING AT WEST ABUTMENT	CY			
				Item 808.9905 Total:	125.00	
095	808.9906	CONCRETE SUBSTRUCTURE CLASS MC WALL STEMS PEDESTRIAN BRIDGE EAST ABUT RETURN WALL STEM WEST ABUTMENT MEDIAN WALL	CY			
				Item 808.9906 Total:	177.00	
096	808.9907	CONCRETE SUBSTRUCTURE CLASS HP WALL STEMS PEDESTRIAN BRIDGE NE PARAPET WALL NW PARAPET WALL WARREN AVENUE BRIDGE NO. 464 WINGWALLS	CY			
				Item 808.9907 Total:	49.00	

Distribution of Quantities

Project Name - Washington #200 - Pedestrian Bridge & Warren Avenue Bridge #464
Estimate Name - Addendum No. 6
R.I. Contract No. - 2012-CB-046
FAP Nos: BRO-0200(007)

<u>Item No.</u>	<u>Item Code</u>	<u>Description</u>	<u>UM</u>	<u>Qty.</u>	<u>Pay Code</u>	<u>Seq. No.</u>
097	808.9908	CONCRETE SUBSTRUCTURE CLASS HP ABUTMENT STEMS	CY			