Request for Quote

STATE OF RHODE ISLAND AND PROVIDENCE PLANTATIONS
ONE CAPITOL HILL
PROVIDENCE RI 02908

CREATION DATE : 09-JAN-13
BID NUMBER: 7459231
TITLE: Ceiling Tile Installation at Zambarano Hospital, DOA

BID CLOSING DATE AND TIME:08-FEB-2013 02:00:00

BUYER: Ohara 2nd, John F
PHONE #: 401-574-8125

BILL TO
DOA CONTROLLER
ONE CAPITOL HILL, 4TH FLOOR
SMITH ST
PROVIDENCE, RI 02908
US

SHIP TO
DOA-FACILITIES AND MAINTENANCE
ZAMBARANO HOSPITAL
2090WALLUM LAKE ROAD
PASCOAG, RI 02859-1813
US

Requistion Number: 1278218

Line	Description	Quantity	Unit	Unit Price	Total
	There will be a Pre-Bid Conference held on 1/28/13 at 10:00 AM at: Zambarano Hospital - Meet at Facilities Office, 2090 Wallum Lake Road, Pascoag, RI 02859 BIDDER IS REQUIRED TO PROVIDE A BID SURETY IN THE FORM OF A BID BOND, OR A CERTIFIED CHECK PAYABLE TO THE STATE OF RHODE ISLAND, IN THE AMOUNT OF A SUM NOT LESS THAN FIVE PERCENT (5%) OF THE BID PRICE. BID SURETY MUST BE ATTACHED TO THE BID FORM. THE SUCCESSFUL BIDDER WILL ALSO BE REQUIRED TO FURNISH PERFORMANCE AND LABOR AND PAYMENT BONDS AT TIME OF TENTATIVE CONTRACT AWARD. Questions concerning this solicitation must be received by the Division of Purchases at: construction@purchasing.ri.gov no later than January 30, 2013 at 12:00 Noon (ET). Questions should be submitted in a Microsoft Word attachment. Please reference the RFQ#7459231 on all correspondence. Questions received, if any, will be posted on the Internet as an addendum to this solicitation. It is the responsibility of all interested parties to download this information.				
1	TOTAL COST TO INSTALL NEW SUSPENDED CEILING TO THE THIRD FLOOR AND SECOND FLOOR SOUTH WING @ ZAMBARANO HOSPITAL - APPROXIMATELY 42,000 SQ FT SOLICITING PROPOSALS TO SUPPLY AND INSTALL A NEW SUSPENDED CEILING TO THE THIRD FLOOR AND SECOND FLOOR SOUTH WING OF THE HOSPITAL. THE INSTALL SHALL DUPLICATE WHAT HAS BEEN DONE ON THE SECOND FLOOR. THE SCOPE OF WORK WILL INCLUDE ANY AND ALL WORK NECESSARY TO INSTALL TILES IN AND AROUND CEILING MOUNTED DEVICES (COMMUNICATION -(PAGING AND NURSE CALL), SPRINKLERS, FIRE ALARMS ETC) Additional Cost per 100SF for areas not identified, same tile, include labor rate, if	1.00	Each		

It is the Vendor's responsibility to check and download any and all addenda from the RIVIP. This offer may not be considered unless a signed RIVIP generated Bidder Certification Cover Form is attached and the Unit Price column is completed. The signed Certification Cover Form must be attached to the front of the offer

Request for Quote

STATE OF RHODE ISLAND AND PROVIDENCE PLANTATIONS
ONE CAPITOL HILL
PROVIDENCE RI 02908

CREATION DATE : 09-JAN-13
BID NUMBER: 7459231
TITLE: Ceiling Tile Installation at Zambarano Hospital, DOA

BID CLOSING DATE AND TIME:08-FEB-2013 02:00:00

BUYER: Ohara 2nd, John F
PHONE #: 401-574-8125

BILL TO
DOA CONTROLLER
ONE CAPITOL HILL, 4TH FLOOR
SMITH ST
PROVIDENCE, RI 02908
US

SHIP TO
DOA-FACILITIES AND MAINTENANCE
ZAMBARANO HOSPITAL
2090WALLUM LAKE ROAD
PASCOAG, RI 02859-1813
US

Requistion Number: 1278218

Line	Description	Quantity	Unit	Unit Price	Total
	requested: $_____ Cost per Additional Light Fixture, if requested: $_____				

Delivery: _____

Terms of Payment: _____

It is the Vendor's responsibility to check and download any and all addenda from the RIVIP. This offer may not be considered unless a signed RIVIP generated Bidder Certification Cover Form is attached and the Unit Price column is completed. The signed Certification Cover Form must be attached to the front of the offer

SPECIFICATION FOR CEILING TILE INSTALLATION AT ZAMBARANO HOSPITAL

LOCATION OF WORK:
WALLUM LAKE HOUSE, 2090 WALLUM LAKE ROAD, PASCOAG, RI

BACKGROUND:
THE BUILDING IS A HOSPITAL CONSTRUCTED IN the 1930s. THE BUILDING HAS A BASEMENT PLUS 3 ½ STORIES, APPROXIMATELY 147,000 GSF.

OBJECTIVE:
DEPARTMENT OF ADMINISTRATION (DOA) IS SOLICITING PROPOSALS FOR A CONTRACTOR TO:

- FURNISH AND INSTALL A SUSPENDED CEILING SYSTEM ON THE THIRD FLOOR AND HALF OF THE SECOND FLOOR AS SHOWN ON THE ENCLOSED DRAWINGS ENTITLED "ZAMBARANO CEILINGS".
- FURNISH AND INSTALL RECESSED CEILING LIGHT FIXTURES AS SHOWN ON THE ENCLOSED DRAWINGS ENTITLED "ZAMBARANO CEILINGS".
- ALL WORK NECESSARY TO INSTALL TILES IN AND AROUND CEILING MOUNTED DEVICES (COMMUNICATION (PAGING AND NURSE CALL), SPRINKLERS, FIRE ALARM, ETC.) INCLUDE THE REMOVAL AND REINSTALLATION OF ANY DEVICES INSTALLED ONTO THE CEILING TILES THEMSELVES.

MATERIALS:
THE NEW TILE, GRID, AND SUSPENSION SYSTEM IS TO MATCH THE SYSTEM IN PLACE THROUGHOUT THE REMAINDER OF THE BUILDING, SPECIFICALLY THE TILE IS ARMSTRONG FISSURED FIREGUARD 2'X2'X $^{5}/_{8}$" WITH A CLASS A FIRE RETARDANT, AND RESISTANT TO SAG, MOLD/MILDEW, AND BACTERIA.
NEW LIGHT FIXTURES SHALL BE ECS-RGT-2-WN-232-UNV-12L AS SHOWN IN ATTACHMENT 1 OR APPROVED EQUAL

WORK SCHEDULE:
THE SCHEDULING OF WORK WILL HAVE TO BE COORDINATED WITH THE ADMINISTRATORS OF THE HOSPITAL BECAUSE HEALTHCARE OPERATIONS MUST COEXIST WITH CONSTRUCTION.

WORKMANSHIP:
ALL WORK WILL BE PERFORMED IN A MANNER CONSISTENT WITH INDUSTRY STANDARDS BY TRADESMEN QUALIFIED AND LICENSED TO PERFORM SUCH WORK IN THE STATE OF RHODE ISLAND AND IN COMPLIANCE WITH ALL LOCAL, STATE AND FEDERAL CODES AND REGULATIONS. PERMITS ARE THE RESPONSIBILITY OF THE CONTRACTOR. ALL WORK SHALL BE NEAT, TRIM, STRAIGHT, AND SECURE AND FINISHED IN ALL DETAILS. EXISTING WORK MUST BE PROTECTED AND ANY DAMAGE CAUSED BY THE CONTRACTOR MUST BE RESTORED BY THE CONTRACTOR.

CHEMICALS:
CONTRACTOR MUST PRESENT MSD SHEETS TO THE PROJECT MANAGER FOR ANY CHEMICALS PROPOSED TO BE USED. NO CHEMICALS CAN BE USED ON PATIENT CARE FLOORS UNLESS APPROVED BY THE PROJECT MANAGER.

BID:
PRIOR TO THE SUBMISSION OF A BID, THE CONTRACTOR MUST SATISFY HIMSELF AS TO THE NATURE, LOCATION AND ALL MATTERS AFFECTING THE COST OF THIS WORK. NO CLAIM FOR EXTRA COMPENSATION WILL BE ENTERTAINED FOR WORK WHICH PRELIMINARY EXAMINATION OF SITE AND UNDERSTANDING OF THE PROJECT OBJECTIVE WOULD HAVE BEEN REVEALED AS NECESSARY TO SATISFY THE PURPOSE INTENDED. THE CONTRACTOR WILL PROVIDE, WITH HIS BID, A WRITTEN PLAN OF ACTION AS TO HOW THIS WORK WILL BE ACCOMPLISHED. THE PLAN MUST CLEARLY DEMONSTRATE THE BIDDERS UNDERSTANDING OF THE PERFORMANCE REQUIREMENTS AND WORKING CONDITIONS. ADDITIONALLY THE PLAN WILL INCLUDE A WORK SCHEDULE AND A SCHEDULE OF VALUES, BASED ON AREA COMPLETED.

APPLICATION FOR PAYMENT:
PROGRESS PAYMENTS WILL BE CONSIDERED AND INVOICES WILL BE BASED ON THE SCHEDULE OF VALUES AND PERCENTAGE OF WORK COMPLETED AND ACCEPTED. FOR INVOICES TO BE PROCESSED FOR PAYMENTS,

SPECIAL CONSIDERATIONS:

1. ALL WORKERS WILL ATTEND A HOSPITAL BASED ORIENTATION AND ONLY THOSE WORKERS WILL BE ALLOWED ON SITE.
2. WORKERS WILL SIGN IN AND OUT DAILY WITH THE FACILITIES OFFICE AND WILL DISPLAY BADGE PROVIDED WHILE ON PROPERTY
3. ALL TOOLS AND MATERIALS WILL BE KEPT IN THE DIRECT CONTROL OF THE TRADESMEN. THEREFORE TRADESMEN WILL WEAR TOOL BELTS, APRONS OR OTHERWISE MAINTAIN CONTROL OF TOOLS AND MATERIALS. TOOLS WILL NOT BE SET DOWN WHILE TRADESMAN PERFORMS OTHER ACTIONS OR LEAVES IMMEDIATE AREA. ALL SHARP AND/OR POINTED HARDWARE AND TRIMMINGS WILL BE CONTROLLED IN A SIMILAR MANNER.
4. NO WORK WILL BE PERFORMED IN OCCUPIED PATIENT ROOMS; IN SCHEDULING WORK, THE HOSPITAL WILL MAKE ACCOMMODATIONS FOR PATIENT TO BE RELOCATED. THEREFORE ONLY A LIMITED NUMBER OF PATIENT ROOMS WILL BE MADE AVAIALBLE ON ANY FLOOR ON ANY DAY.
5. ANY LIFE SAFETY EQUIPMENT REMOVED OR ALTERED WILL BE RETURNED TO FULL SERVICE PRIOR TO THE WORK AREA BEING VACATED AND AT THE END OF EACH DAY.
6. IDENTIFIED EGRESS ROUTES WILL NOT BE IMPEDED.
7. DUST IS CONSIDERED TO BE POTENTIALLY INFECTIOUS AND MUST BE CONTROLLED BY THE CONTRACTOR AT ALL TIMES. TILES WILL NOT BE SAWN. AREA WILL BE KEPT CLEAN AND DUST FREE AT ALL TIMES. SCRAP AND OR DEBRIS WILL BE REMOVED ON AN ONGOING PROCESS. VACUUM USED WILL HAVE A HEPA FILTER ATTACHED AND FUNCTIONING AT ALL TIMES OF OPERATION.
8. OFFSITE DISPOSAL OF ALL DEBRIS IS THE RESPONSIBILITY OF THE CONTRACTOR. STATE DUMPSTERS WILL NOT BE USED FOR DISPOSAL.
9. A STORAGE AREA FOR MATERIAL AND TOOLS WILL BE PROVIDED. CONTRACTOR WILL LIMIT THE AMOUNT OF STORAGE SO AS NOT TO OBSTRUCT THE NORMAL ACTIVITY IN THE AREA AND WILL MAINTAIN THE AREA FREE OF DEBRIS AND IN A BROOM CLEAN CONDITION AT ALL TIMES.

ATTACHMENT 1

Category: ECS
Energy Conservation Series

Prefix:
RGT

Fixture Series (Name):
Rec. General Troffer

RENOVA
Innovative Lighting Ideas
Energy Efficient Solutions

Recessed General Troffer Series general purpose fluorescent luminaire

GENERAL DESCRIPTION

The Recessed General Troffer (RGT) Series has been developed for general illumination for recessed T-Bar grid applications. This series utilizes computer designed reflector technology for optimal fixture efficiency, reduction of energy consumption and improved quality of light. It also provides instant-on operation and offers many other energy saving options.

Typical applications for this type of product are interior spaces where finished T-Bar grid ceilings exist. Applications include:

- Commercial / Corporate Office Spaces
- Hospitals, Government Facilities and Military Bases
- Retail Spaces, Schools, Colleges and Universities
- All General Illumination Indoor Applications

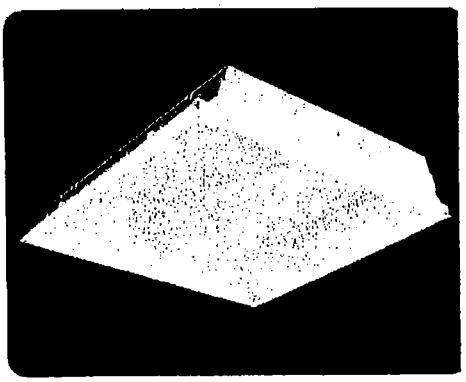

DESIGN FEATURES / SPECIFICATIONS

CONSTRUCTION
- Precision die formed from 22 ga. cold rolled steel.
- Mechanically fastened.
- Finish to be pre-painted gloss white polyester powder coat.

REFLECTOR
- Precision die formed optics which has been designed for maximum efficiency and photometric properties using the latest CAD software.
- Choice of optics includes focused, normal and spread beam distribution. Consult factory for custom optics design and spacing criteria options.
- Choice of materials include:
  - Alanod Miro4® Enhanced Specular Aluminum, 95% total reflectance, 25 year warranty.
  - Enhanced Specular Aluminum, 92% total (min.) reflectance, 25 year warranty.
  - High Reflectance White Powder Coated Aluminum, 91% total reflectance, 10 year warranty.
  - Polished Aluminum, 87% total (min.) reflectance, 25 year warranty.
  - Consult factory for availability of all other material choices.

LAMPHOLDERS
- Vossloh-Schwabe® premium type featuring:
  - Anti-vibration internal lamp locking design
  - High temperature resistant ('T' marking).
  - Heat and UV blocking shield to prevent degradation of material.
  - Multi-point contact design for optimum lamp pin contact.
  - Produced in accordance with DIN ISO 9001 and IEC standards.

BALLASTS
- All standard ballasts are electronic, energy saving, thermally protected, Class-P, non-PCB, Sound Rated "A", 0 degree (Type 1 Outdoor). Verify with factory for latest information regarding High Temperature (HT) or Extreme Low Temperature (XLT) rated ballast options.
- UL/CSA certified, where applicable. Compliant with Federal Ballast Law (Public Law 100-357, 1988).
- Choice of ballast factors. L=Low, N=Normal, H=High.
- Choice of dedicated, universal or special voltage - Consult factory for available options.
- Warranted by ballast manufacturer. Typical ballast warranty is for 5 years (120-277v) and 3-years (347-480v). Consult factory for latest warranty information.

LAMPS
- Supplied by others unless otherwise specified.
- Factory installed if required - Consult factory.
- Lamp type, CRI ratings, temperature colors, lamp life ratings are all viable options which can be supplied - Consult factory for information.

LAMP SHIELDING
- Lamp shielding options include:
  - Heavy duty powder coated or zinc-plated wire guards.
  - Flat or drop dish lenses, clear acrylic, clear polycarbonate, high light transmission white, prismatic and linear prism lenses. Consult factory for all available options.
  - Louvers and cross-blade baffles - Consult factory.

MOUNTING
- The luminaire is designed to be mounted in a standard T-Bar ceiling grid. Integral T-Bar safety clips are standard – no need to install separate clips.

ELECTRICAL
- Luminaire is bi-national listed and labeled (UL 1598 and CSA C22.2 No. 250.0-00) and is suitable for damp locations.
- Product includes luminaire disconnect as specified in NEC 410.73(G), 2005 Edition, and CEC part I, rule 30-308(4), 2006 Edition.

QUALITY CONTROL
- All fixtures and retrofit kits are designed, fabricated assembled and tested at RENOVA's manufacturing facility. All fixtures are 100% lamp tested, inspected and labeled prior to shipment.

GUARANTEE
- RENOVA warrants all fixtures to be free of defects in manufacturing and workmanship for a period of (1) year from date of purchase. This warranty excludes damage of any kind resulting from improper installation, misuse, abuse, accidents, mis-application, or natural disasters. Please refer to the "Terms and Conditions" section of the RENOVA website for additional information.

Note: RENOVA products are constantly being improved; therefore, the information shown is subject to change without notice. Always consult your lighting representative or RENOVA Lighting Systems, Inc. for the latest information.

RENOVA Lighting Systems, Inc. • 15 Wellstown Road • Ashaway, RI 02804 • (800) 635-6682 • www.renova.com

Category: ECS	Prefix:	Fixture Series (Name):
Energy Conservation Series	RGT	Rec. General Troffer

RENOVA™
Innovative Lighting Ideas
Energy Efficient Solutions

2-Lamp T8 2x2 Rec. General Troffer Cross Section Shown

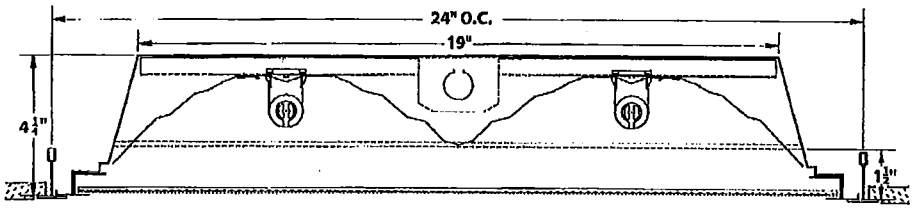

ORDERING GUIDE

CATEGORY	SERIES	SIZE		REFLECTOR MATERIAL	REFLECTOR PHOTOMETRY		NUMBER OF LAMPS	LAMP TYPE (WATTAGE)		BALLAST VOLTAGE		NUMBER OF BALLASTS	LAMPS PER BALLAST	BALLAST FACTOR		OPTIONS
ECS	RGT	2	-	M	N	-	2	32	-	UNV	-	1	2	N	-	PRS
Energy Conservation Series	RGT - REC. GENERAL TROFFER	1 - 1x4 2 - 2x2 4 - 2x4		M - MIRO4 (95% TR) E - ENHANCED ALUMINUM (92% TR min) W - WHITE (91% TR) A - ALUMINUM (87% TR min) B - BALLAST COVER (White) (83% TR min) H - MIRO4 MICRO-MATT (85% TR)	F - FOCUSED N - NORMAL S - SPREAD C - CUSTOM OPTICS		2 - 2L 3 - 3L 4 - 4L 5 - 5L 6 - 6L	32 32w T8 54 54w T5HO		120 - 120v, 60 Hz 277 - 277v, 60 Hz 347 - 347v, 60 Hz UNV - 120V - 277v, 60 Hz 480 - 480v, 60 Hz xxx - Less Ballast		S - SLAVE (BLANK) - 1 2 - 2 3 - 3 4 - 4	(BLANK) - 0 1 - 1 2 - 2 3 - 3 4 - 4 *Use Suffix "M" for Master (Example: 4M)	L - Low N - Normal H - High		PRS - Clear Prismatic (A17) Lens OW - Open Style WW - White Wire Guard CW - Clear Acrylic Lens AWW - White Wire Guard & Clear Acrylic Lens *ADDITIONAL OPTIONS (See "Options" sheet for all available options)

IES SUSTAINING MEMBER

MADE IN THE USA

c UL us LISTED

Photometric data, IES files and all other information is available upon request.

Veteran OWNED AND OPERATED

Vandal Locking Lampholders (Standard)



Multi-Faceted Reflector (Designed for Maximum Efficiency)



Cam Latch (Secured to Frame Door) (Provides Quick Access to Lamps/Ballasts)



Mounting Details (Included in all Housings)

Note: RENOVA products are constantly being improved; therefore, the information shown is subject to change without notice. Always consult your lighting representative or RENOVA Lighting Systems, Inc. for the latest information.

RENOVA Lighting Systems, Inc. • 15 Wellstown Road • Ashaway, RI 02804 • (800) 635-8682 • www.renova.com

REQUEST FOR QUOTE #7459231

INSURANCE

AN INSURANCE CERTIFICATE IN COMPLIANCE WITH PROVISIONS OF ITEM 31 (INSURANCE) OF THE GENERAL CONDITIONS OF PURCHASE IS REQUIRED FOR COMPREHENSIVE GENERAL LIABILITY, AUTOMOBILE LIABILITY, AND WORKERS' COMPENSATION AND MUST BE SUBMITTED BY THE SUCCESSFUL BIDDER(S) TO THE DIVISION OF PURCHASES PRIOR TO AWARD. THE INSURANCE CERTIFICATE MUST NAME THE STATE OF RHODE ISLAND AS CERTIFICATE HOLDER AND AS AN ADDITIONAL INSURED. FAILURE TO COMPLY WITH THESE PROVISIONS MAY RESULT IN REJECTION OF THE OFFEROR'S BID. ANNUAL RENEWAL CERTIFICATES MUST BE SUBMITTED TO THE AGENCY IDENTIFIED ON THE PURCHASE ORDER. FAILURE TO DO SO MAY BE GROUNDS FOR CANCELLATION OF CONTRACT.

SURETY

BIDDER IS REQUIRED TO PROVIDE A BID SURETY IN THE FORM OF A BID BOND, OR A CERTIFIED CHECK PAYABLE TO THE STATE OF RHODE ISLAND IN THE AMOUNT OF A SUM NOT LESS THAN FIVE PERCENT (5%) OF THE BID PRICE. BID SURETY MUST BE ATTACHED TO THE BID FORM. THE SUCCESSFUL BIDDER WILL ALSO BE REQUIRED TO FURNISH PERFORMANCE AND LABOR AND PAYMENT BONDS AT TIME OF TENTATIVE CONTRACT AWARD.

WAGE

BIDDERS ARE ADVISED THAT ALL PROVISIONS OF TITLE 37 CHAPTER 13 OF THE GENERAL LAWS OF RHODE ISLAND APPLY TO THE WORK COVERED BY THIS REQUEST, AND THAT PAYMENT OF THE GENERAL PREVAILING RATE OF PER DIEM WAGES AND THE GENERAL PREVAILING RATE FOR REGULAR, OVERTIME, AND OTHER WORKING CONDITIONS EXISTING IN THE LOCALITY FOR EACH CRAFT, MECHANIC, TEAMSTER, OR TYPE OF WORKMAN NEEDED TO EXECUTE THIS WORK IS A REQUIREMENT FOR BOTH CONTRACTORS AND SUBCONTRACTORS. THE PREVAILING WAGE TABLE MAY BE OBTAINED AT THE RI DIVISION OF PURCHASES HOME PAGE BY INTERNET AT www.purchasing.state.ri.us . SELECT "INFORMATION' AND THEN SELECT "PREVAILING WAGE TABLE". THE STATE OF RHODE ISLAND USES THE GENERAL DECISION NUMBER R120030001. PRINTING THE ENTIRE DOCUMENT AVERAGES APPROXIMATELY ONE MINUTE PER PAGE. YOU MAY WANT TO PRINT ONLY THE PAGES APPLICABLE TO YOUR BID. BIDDERS NOTE: IN THE EVENT THIS BID SPECIFIES PRICE OFFERS ON A

TIME-AND-MATERIAL BASIS, ie., AN HOURLY RATE, ANY OR ALL BIDS SUBMITTED IN AN AMOUNT LESS THAN THE PREVAILING RATE IN EFFECT FOR WORK COVERED BY THIS REQUEST AS OF THE DATE OF BID ISSUANCE SHALL BE REJECTED BY THE DIVISION OF PURCHASES.

RIVIP

IT IS THE VENDOR'S RESPONSIBILITY TO CHECK AND DOWNLOAD ANY AND ALL ADDENDA FROM RIVIP. THIS OFFER MAY NOT BE CONSIDERED UNLESS A SIGNED RIVIP GENERATED BIDDER CERTIFICATION COVER FORM IS ATTACHED AND THE UNIT PRICE COLUMN IS COMPLETE. THE SIGNED CERTIFICATION COVER FORM MUST BE ATTACHED TO THE FRONT OF THE OFFER. WHEN DELIVERING OFFERS IN PERSON TO ONE CAPITOL HILL, VENDORS ARE ADVISED TO ALLOW AT LEAST ONE HOUR ADDITIONAL TIME FOR CLEARANCE THROUGH SECURITY CHECKPOINTS.

THIS OFFER MAY NOT BE CONSIDERED UNLESS BIDDER CERTIFICATION COVER FORM IS ATTACHED AND THE UNIT PRICE COLUMN IS COMPLETED. THE SIGNED CERTIFICATION COVER FORM MUST BE ATTACHED TO THE FRONT OF THE OFFER. WHEN DELIVERED OFFERS ON PERSON TO ONE CAPITOL HILL, VENDORS ARE ADVISED TO ALLOW AT LEAST ONE HOUR ADDITIONAL TIME FOR CLEARANCE THROUGH SECURITY CHECKPOINTS.

INSPECTION

BIDDERS ARE RESPONSIBLE FOR INSPECTION OF EQUIPMENT AND/OR LOCATION, TAKING MEASUREMENTS* WHEN REQUIRED, AND MAKING THEMSELVES AWARE OF THE TOTAL REQUIREMENT BEFORE SUBMITTING BID. "MEASUREMENTS PROVIDED WITH ANY BID ARE FOR REFERENCE PURPOSES AND ARE NOT GUARANTEED TO BE COMPLETELY ACCURATE.

LICENSE

VENDOR (OWNER OF COMPANY) IS RESPONSIBLE TO COMPLY WITH ALL LICENSING OR STATE PERMITS REQUIRED FOR THIS TYPE OF SERVICE. A COPY OF LICENSE/PERMIT SHOULD BE SUBMITTED WITH THIS BID. IN ADDITION TO THESE LICENSE REQUIREMENTS, BIDDER, BY SUBMISSION OF THIS BID, CERTIFIES THAT ANY/ALL WORK RELATED TO THIS BID, AND ANY SUBSEQUENT AWARD WHICH REQUIRES A RHODE ISLAND LICENSE(S), SHALL BE PERFORMED BY AN INDIVIDUAL(S) HOLDING A VALID RHODE ISLAND LICENSE.

START

STARTING DATE _____ NO. OF WORKING DAYS REQUIRED FOR COMPLETION _____

SUBSTITUTIONS

A) THE MATERIALS, PRODUCTS, AND EQUIPMENT DESCRIBED IN THE BIDDING DOCUMENTS ESTABLISH A STANDARD OF REQUIRED FUNCTION, DIMENSION, APPEARANCE, AND QUALITY TO BE MET BY ANY PROPOSED SUBSTITUTION. B) NO SUBSTITUTION WILL BE CONSIDERED PRIOR TO RECEIPT OF BIDS UNLESS WRITTEN REQUEST FOR APPROVAL HAS BEEN RECEIVED BY THE ARCHITECT AT LEAST 10 DAYS PRIOR TO THE DATE FOR RECEIPT OF BIDS. SUCH REQUESTS SHALL INCLUDE THE NAME OF THE MATERIAL OR EQUIPMENT FOR WHICH IT IS TO BE SUBSTITUTED AND A COMPLETE DESCRIPTION OF THE PROPOSED SUBSITUTION INCLUDING DRAWINGS, PERFORMANCE, AND TEST DATA AND OTHER INFORMATION NECESSARY FOR AN EVALUATION. A STATEMENT SETTING FORTH CHANGES IN OTHER MATERIALS, EQUIPMENT, OR OTHER PORTIONS OF THE WORK, INCLUDING CHANGES IN THE WORK OF OTHER CONTRACTS THAT INCORPORATION OF THE PROPOSED SUBSTITUTION WOULD REQUIRE, SHALL BE INCLUDED. THE BURDEN OF PROOF OF THE MERIT OF THE PROPOSED SUBSTITUTION IS UPON THE PROPOSER. THE ARCHITECT'S DESIGION OF APPROVAL OR DISAPPROVAL OF A PROPOSED SUBSTITUTION SHALL BE FINAL. C) IF THE ARCHITECT APPROVES A PROPOSED SUBSTITUTION PRIOR TO RECEIPT OF BIDS, SUCH APPROVAL WILL BE SET FORTH IN AN ADDENDUM. BIDDERS SHALL NOT RELY UPON APPROVALS MADE IN ANY OTHER MANNER. D) NO SUBSTITUTIONS WILL BE CONSIDERED AFTER THE CONTRACT AWARD UNLESS SPECIFICALLY PROVIDED FOR IN THE CONTRACT DOCUMENTS.

General Notes

No.	Revision/Issue	Date

Firm Name and Address

Project Name and Address

Zambarano hospital
Pascoag, RI
3rd floor - North Wing

Project: Zambarano

Description: Ceilings

Scale:

Sheet: 2 of 2

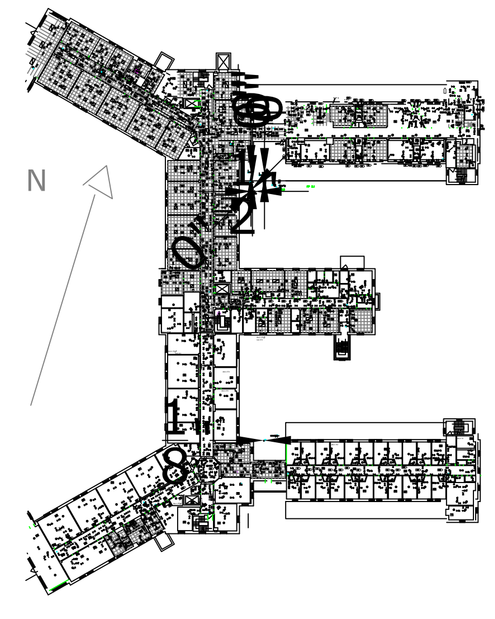

General Notes

No.	Revision/Issue	Date

Firm Name and Address

Project Name and Address

Zambarano Hospital
Pascoag, RI
2nd floor - South Wing
3rd floor - South Wing

Project	Sheet
Zambarano Ceilings	1 of 2
Scale	