



State of Rhode Island  
Department of Administration / Division of Purchases  
One Capitol Hill, Providence, Rhode Island 02908-5855  
Tel: (401) 574-8100 Fax: (401) 574-8387

**ADDENDUM # 1**

4/22/13  
RFQ #7461351

**Title: Furnish and Install Toilet Partitions Stalls - CCRI**

**Submission Deadline: May 1, 2013 at 10:00 AM Local Prevailing Time**


**Per the issuance of ADDENDUM #1 the following are noted:**

- Response to Pre-Bid questions / Bid Clarifications
- Pre-bid attendance sheet
- Approved "Equal" documentation

This addendum, in its entirety is available on-line on the Rhode Island, Division of Purchases website at [www.purchasing.ri.gov](http://www.purchasing.ri.gov)

*Interested parties should monitor this website, on a regular basis, for any additional information that may be posted.*

Gary P. Mosca  
Buyer



STATE OF RHODE ISLAND AND PROVIDENCE PLANTATIONS

Department of Administration  
DIVISION OF PURCHASES  
One Capitol Hill  
Providence, RI 02908-5855

Tel: (401) 574-8100  
Fax: (401) 574-8387  
Website:  
www.purchasing.ri.gov

**Pre-Bid Conference**  
**Bid #7461351**  
**Furnish & Install Toilet Partitions Stalls – CCRI**

**Bid Closing Date and Time: 01-May-2013 @ 10:00 AM (ET)**

**Questions & Clarifications:**

**Revision: Work Hours**

**From:** Project is to be completed during normal operating business hours 7 AM – 3:30 PM Monday – Friday.

**Revision: Work Hours**

**To:** Project is to be completed during 2<sup>nd</sup> and 3<sup>rd</sup> shift only. Saturday's and Sundays are available to vendors for work.

**Note:** Saturday's work can be performed only 2<sup>nd</sup> and 3<sup>rd</sup> shift;

Sunday's work can be performed any/all hours. Building is available 24 hours for Sunday work.

Can work be performed on ground floor during 1<sup>st</sup> shift?

**Response:** Yes, ground floor only.

What is the total amount of single partitions?

**Response:** There are a total of 12 bathrooms. Total single partitions are (11). Total double partitions are (2). Vendor is responsible to furnish and install (13) toilet partition stalls (1) Urinal screen, and (3) privacy screens.

Who will provide replacement dispensers or holders if any are broken?

**Response:** CCRI has a supply and will provide to vendor for replacement.

What type of mount is required?


**Response:** Same as existing.

**Notice to Vendors:**

Please see attached documentation for "Approved Equal".

The attached submitted substitute, **Global Partitions** has been approved "as equal" and can be used as an alternative product for bidding purposes.

See Attached:

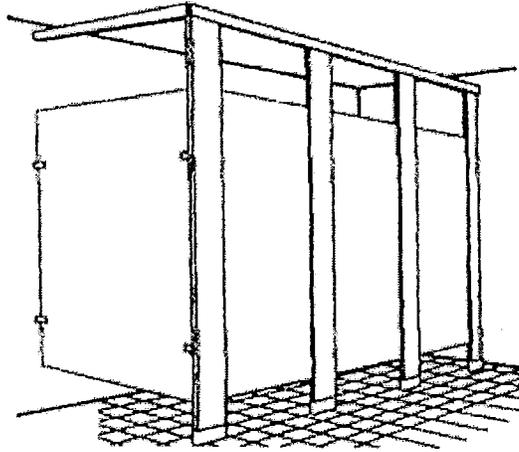

GLOBAL PARTITIONS guarantees that the restroom partitions shall be fabricated in accordance with GLOBAL'S approved drawings and specifications.

GLOBAL PARTITIONS guarantees its phenolic partitions, properly maintained, against delamination, breakage, or corrosion, for **10 YEARS** from the date of receipt by the customer. If material is found defective during that period, the material shall be replaced free of charge. No credits or allowances shall be issued for any labor or expenses relating to the replacement of components covered under the warranty plan.

This warranty shall not be applicable if vandalism or improper cleaning/maintenance of partitions has contributed as just cause for partition failure.

**Global Partitions**

2171 Liberty Hill Road, Eastanollee, GA 30538

Tel: 706.827.2700 Fax: 706.827.2710

E-mail: sales@globalpartitions.com Web: globalpartitions.com

©2012 Global Partitions, an ASI Group Company




Rev. 08/12

# PHENOLIC - BLACK CORE

Phenolic partitions are the material of choice where durability and strength are required. These partitions are fabricated to stand the test of time. The dense components, combined with stainless steel brackets and fasteners, stand up to the most extreme conditions of moisture and humidity. Phenolic is impact, water and corrosion resistant, and does not support bacteria.

The phenolic partition is decoratively faced on both sides as an integral part of a resin-impregnated kraft paper core. The surface and core sheets are fused at high temperature and pressure. In addition to strength and serviceability, a wide range of colors provides limitless design flexibility. Phenolic partitions are available in all four installation styles.

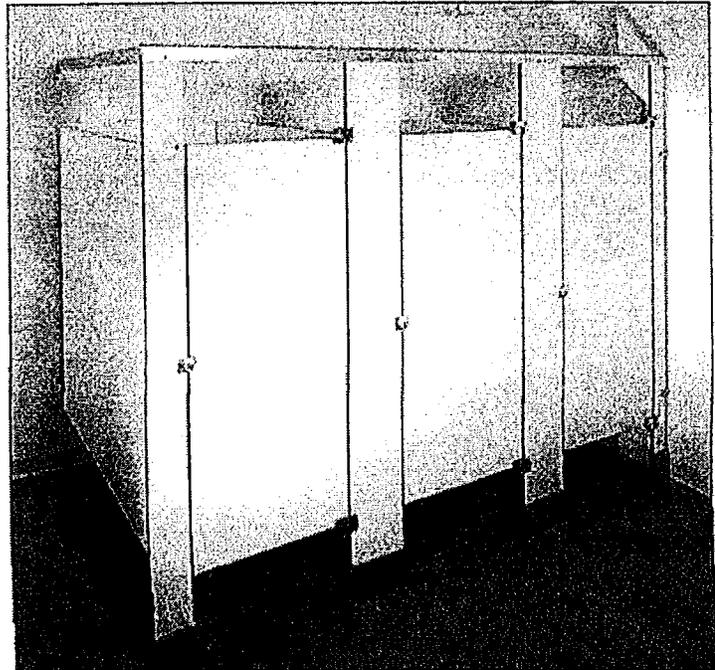


**FAST TRACK: 48 Hour Shipping**  
Available in all standard colors shown below  
— Floor Anchored/Overhead Braced only.

## COLOR SELECTION:



White 4020




Silver Gray 4410




Marine Glass 1130



Silver Gray 3030




Flamingo Green 3300



Hunter Net 6035



Burgundy 5000



Graphite Graph 3620



Ebony Gray 3320




Dove Gray 3310


## CONSTRUCTION FEATURES:




**Emergency Access**  
Meets ADA requirements. Slotted keeper coupled with gravity hinges allows access in an emergency.



**Shoe Construction**  
Stainless steel, double-ended trim shoe with #4 satin finish conceals mounting fasteners and hardware.



**Vault Hinge**  
Rugged, attractive wrap-around hinge. Extra strong for heavy-duty installations.



**Vandal-Resistant Fasteners**  
Special driver installs fasteners, virtually eliminating unauthorized removal, and ensuring easy installation. Stainless steel fasteners are standard for phenolic partitions.

## OPTIONS:

- Class "A" Fire Rated Material
- Continuous Hinges
- Continuous Stainless Steel Brackets
- Continuous Aluminum Brackets
- Ultimate Privacy™ Height Options
- No Sight Hardware

**PART-1 GENERAL**

**1.01 DESCRIPTION**

- A. Phenolic compartment work includes the following:
  - 1. Floor anchored/overhead braced partitions.
- B. Furnish all labor and materials necessary for the completion of work in this section as shown on the contract drawings and specified herein.
- C. Work in this section shall include but is not limited to:
  - 1. Toilet compartments
  - 2. Hardware for toilet compartments
  - 3. Shop drawings and working drawings
  - 4. Manufacturer's guarantee
- D. Related work specified elsewhere shall include accessories and anchorage/blocking for attachment of compartments.

**1.02 PRODUCTS**

- A. Submittal of shop drawings and details, for architect's approval.
- B. Colors shall be selected from the manufacturer's standard range of colors.
- C. Color and hardware samples shall be submitted for approval to the architect upon request.

**PART-2 PRODUCTS**

**2.01 MANUFACTURER**

- A. Toilet compartments to be supplied by Global Partitions Corp., Eastanollee, Georgia, 30538.

**2.02 MATERIALS**

- A. Doors shall be constructed of 1/4" solid phenolic core decorative plastic laminate with multiple resin-impregnated kraft and surface sheets fused at high temperature and pressure.
- B. Panels shall be constructed of 1/2" solid phenolic core decorative plastic laminate with multiple resin-impregnated kraft and surface sheets fused at high temperature and pressure.
- C. Pilasters shall be constructed of 1/4" solid phenolic core decorative plastic laminate with multiple resin-impregnated kraft and surface sheets fused at high temperature and pressure.

**2.03 CONSTRUCTION**

- A. Doors shall be constructed of 1/4" solid phenolic core decorative plastic laminate with multiple resin-impregnated kraft and surface sheets fused at high temperature and pressure; the edges being finished and polished.
- B. Panels shall be constructed of 1/2" solid phenolic core decorative plastic laminate with multiple resin-impregnated kraft and surface sheets fused at high temperature and pressure; the edges being finished and polished.
- C. Pilasters shall be constructed of 1/4" solid phenolic core decorative plastic laminate with multiple resin-impregnated kraft and surface sheets fused at high temperature and pressure; the edges being finished and polished. Pilasters shall include a mounting system comprising a 1/4" x 3/4" stainless steel bar attached to the pilaster having 3/8" zinc plated steel bolts secured to nuts imbedded within a contoured aperture transversely piercing the core at least 1" above the mounting end. Each mounting bar shall be secured to the building structure with 3/8" zinc plated steel studs.
- D. Headrail shall be provided to bridge all compartments and brace the end freestanding pilasters to the wall; the headrail to comprise anodized aluminum with satin finish, contoured to provide anti-grip features.

**2.04 HARDWARE (NOTE: Refer to the ORDER INFORMATION CONTRACT for specific hardware to be supplied on your order.)**

- A. All exposed door hardware shall be as noted:
  - 1. Heavy-duty diecast (vault) zamac hinge shall have gravity-acting cams and are fabricated from a die cast aluminum alloy with a brushed finish and wrap around flanges. The cam is constructed from a 1/4" diameter nylon rod and a 3/8" stainless steel pin. Slide latch, strike/keeper and hinges are through-bolted onto doors and pilasters using stainless steel vandal-resistant through bolts. Hinges are easily adjusted at the jobsite to a full close or partially open position, as required. Keeper provides for emergency access into the stall by lifting up on the bottom of the door.
  - 2. Optional: Continuous stainless steel hinge. Slide latch, strike/keeper and hinges are through bolted onto doors and pilasters using stainless steel, vandal-resistant through bolts.
- B. Panel and pilaster brackets shall be as noted:
  - 1. Stainless steel stirrup brackets shall be 2" long. Stirrup brackets shall be 1/8" thick and mounted with stainless steel, vandal-resistant screws. Panels shall be attached with stainless steel, vandal-resistant through bolts. The attachment of brackets to the adjacent wall construction shall be accomplished with 2 1/2" stainless steel vandal-resistant screws and plastic anchors.
  - 2. Optional: Continuous heavy duty anodized extruded aluminum (6063-T5 alloy) wall brackets are pre-drilled. Wall brackets are mounted with stainless steel, vandal-resistant screws. The attachment of brackets to the adjacent wall construction shall be accomplished with 2 1/2" stainless steel vandal resistant screws and plastic anchors.
  - 3. Optional: Continuous heavy duty stainless steel wall brackets are pre-drilled. Wall brackets are mounted with stainless steel, vandal-resistant screws. The attachment of brackets to the adjacent wall construction shall be accomplished with 2 1/2" stainless steel vandal resistant screws and plastic anchors.
- C. Pilaster shoes shall be of type 304 steel #4 finish.
- D. Headrail shall be made of heavy-duty anodized extruded aluminum (6063-T5 alloy). Headrail is anti-grip and attaches to the top of the pilaster with stainless steel, tamper-resistant screws. Headrail is attached to the adjacent wall construction with a headrail bracket.
- E. Headrail brackets shall be made from a die cast aluminum alloy and shall be attached to the adjacent wall construction with 2 1/2" stainless steel, tamper-resistant screws and plastic anchors.

**PART-3 EXECUTION**

**3.01 PREPARATION**






- A. Examine areas to receive toilet compartments for correct height and spacing of anchorage/blocking and plumbing fixtures that may affect installation of compartments. Report any discrepancies to the architect.
- B. Take complete and accurate measurements of toilet compartment locations.
- C. Start of work constitutes acceptance of job.

**3.02 INSTALLATION**

- A. Install compartments in a rigid, straight, plumb and level manner as shown on the shop drawings and manufacturer's installation instructions.
- B. All doors and panels to be mounted at 12" above the finished floor.
- C. Clearance at vertical edges of door shall be uniform top to bottom.
- D. No evidence of cutting, drilling and/or patching shall be visible on the finished work.
- E. Finished surfaces shall be cleaned after installation and be left free of all imperfections.

**3.03 WARRANTY**

- A. Global Steel Products Corp. guarantees its black core phenolic units, properly maintained, against delamination, breakage or corrosion for 10 years from the date of receipt by the customer. If materials are found defective during that period for the reasons listed above, the material will be replaced free of charge. No credits or allowances will be issued for any labor or expenses relating to the replacement of components covered under the warranty plan. All such expenses are to be borne by the buyer.

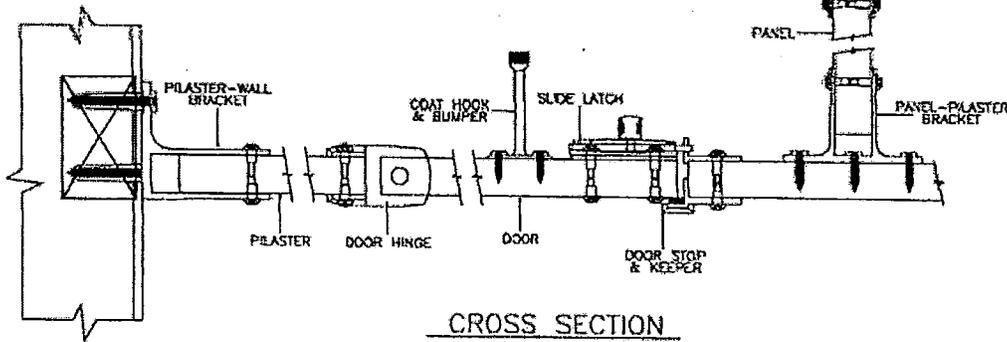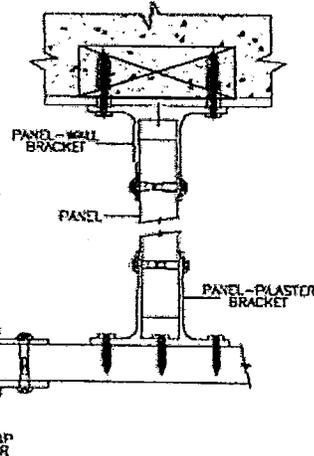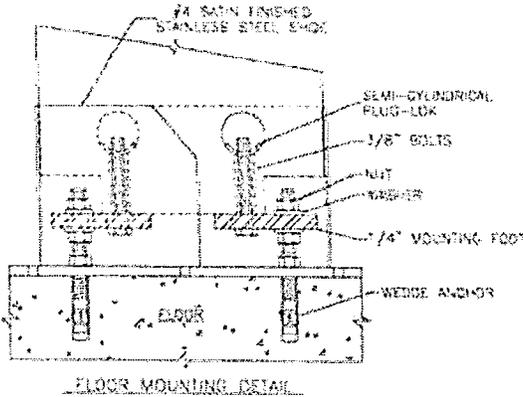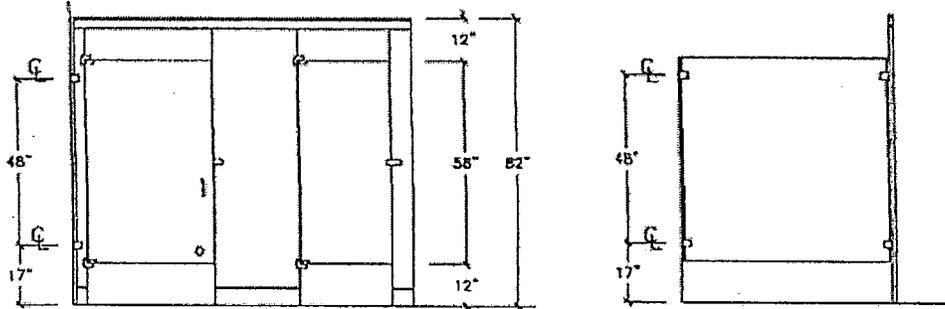

CROSS SECTION

Company	Representative	Address	Email	Phone
1. GJ Sales Co	Brian Jorgensen	64 Hope Ave. Hope, RI 02831	brian@jjsales.net or mail.com	926-2650
2. GJ SALES CO	FRED JORGENSEN	64 HOPE AVE., HOPE, RI 02831	FRED@JJSALES.NET or MAIL.COM	876-2650
3. CHAMBERLIN of RI	MIKE SCHAUB	160 GARNWICK AVE WARWICK RI 02886	CHAMBERLINR@VERIZON.NET	739-2226
4. ADM CONSTRUCTION	ADAM RODEN	P.O. BOX 204 ALBION, RI 02802	ARODZINK@COX.NET	401-256-6526
5.				
6.				
7.				
8.				
9.				
10.				
11.				
12.				