

May 13, 2009

STATE OF RHODE ISLAND AND PROVIDENCE PLANTATION
DEPARTMENT OF TRANSPORTATION
RHODE ISLAND CONTRACT NO.2009-CH-031
FEDERAL-AID PROJECT NO. FAP Nos: IM-0953(108)

I-95 Resurfacing Southern C-1

Connecticut State Line to exit 3
CITY/TOWN OF Hopkinton, Richmond
COUNTY OF WASHINGTON

NOTICE TO PROSPECTIVE BIDDERS

ADDENDUM NO. 3 Prospective bidders and all concerned are hereby notified of the following changes in the Plans, Specifications, Proposal and Distribution of Quantities for this contract. These changes shall be incorporated in the Plans, Specifications, Proposal and Distribution of Quantities, and shall become an integral part of the Contract Documents.

A. Contract Documents


1. Specifications – Job Specific

a. Page JS-15

Delete JS-15 in its entirety and replace with revised page JS-15(R-1) attached to this Addendum No. 3. The specification has been revised.

b. Pages JS-31 through JS- 35

Delete JS-31 through JS- 35 in their entirety and replace with revised pages JS-31(R-1) through JS-35(R-1) attached to this Addendum No. 3. The specification has been revised.




RI Department of Transportation
Chief Engineer

- a. Aggregate stockpiles from approved sources shall be available at the plant site no later than two days prior to production for verification testing by the Engineer.


402.02 CONSTRUCTION METHODS.

402.03.1 General Requirements. The mixing, placing and finishing of bituminous friction course shall conform to the applicable requirements of Subsection 401.03 of the Specifications, together with the following exceptions and additional conditions:

- a. Both the mixing temperature and the temperature of the friction courses at the time of placement shall be within the range of 260° F to 300° F.
- b. The plant shall operate solely for the production of this mixture and exclusively for the State of Rhode Island. The mixture will not be allowed to remain in surge silos for more than one hour. The use of silos for storage will not be permitted.
- c. The mixture shall be compacted to the required density with adequately ballasted static steel wheel rollers. Adequately ballasted vibratory rollers may be allowed provided they are used in the static mode.
- d. The mixture shall be placed as soon as possible after completion of mixing at the plant. It shall be placed within 90 minutes from its time of arrival at the job site, subject to the specified placement temperature range.

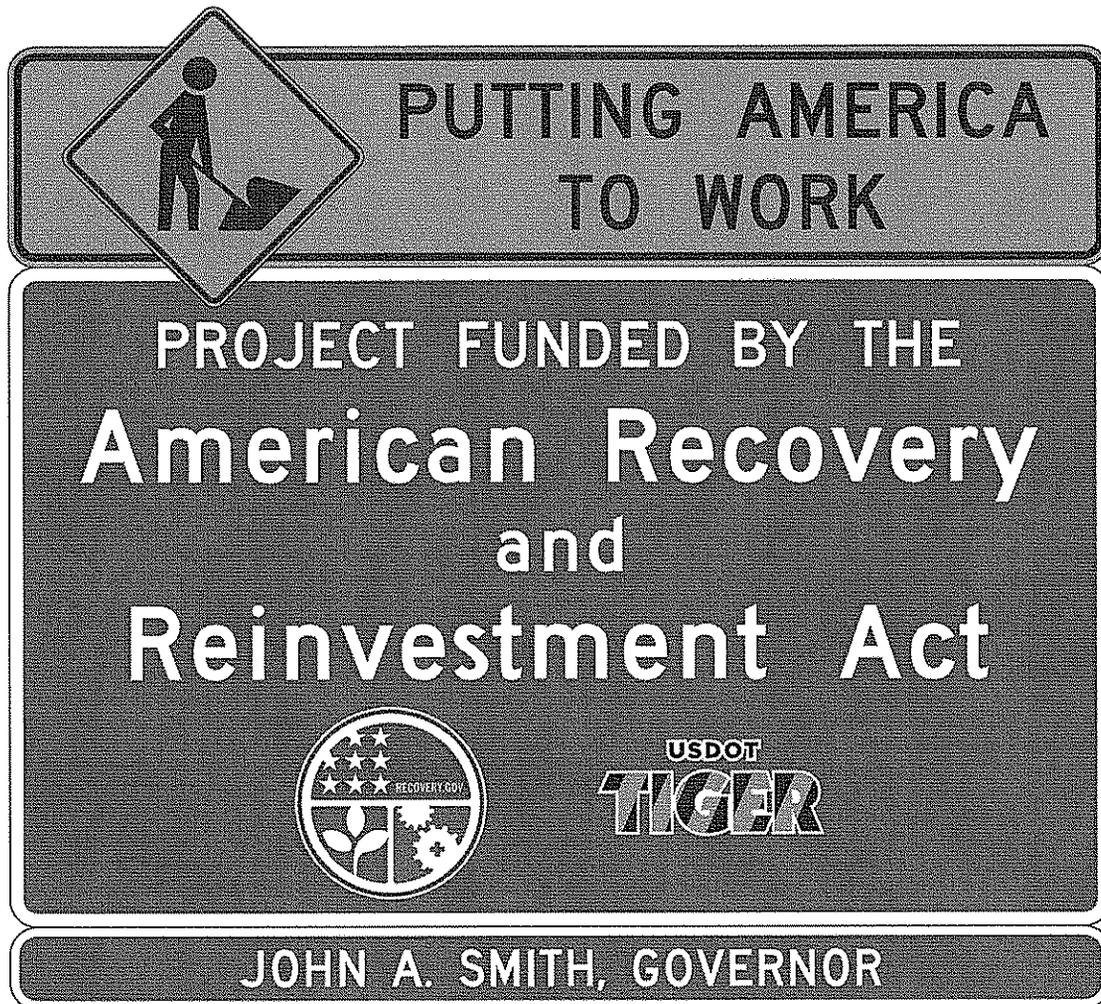

PROJECT FUNDING SOURCE
SIGN ASSEMBLY

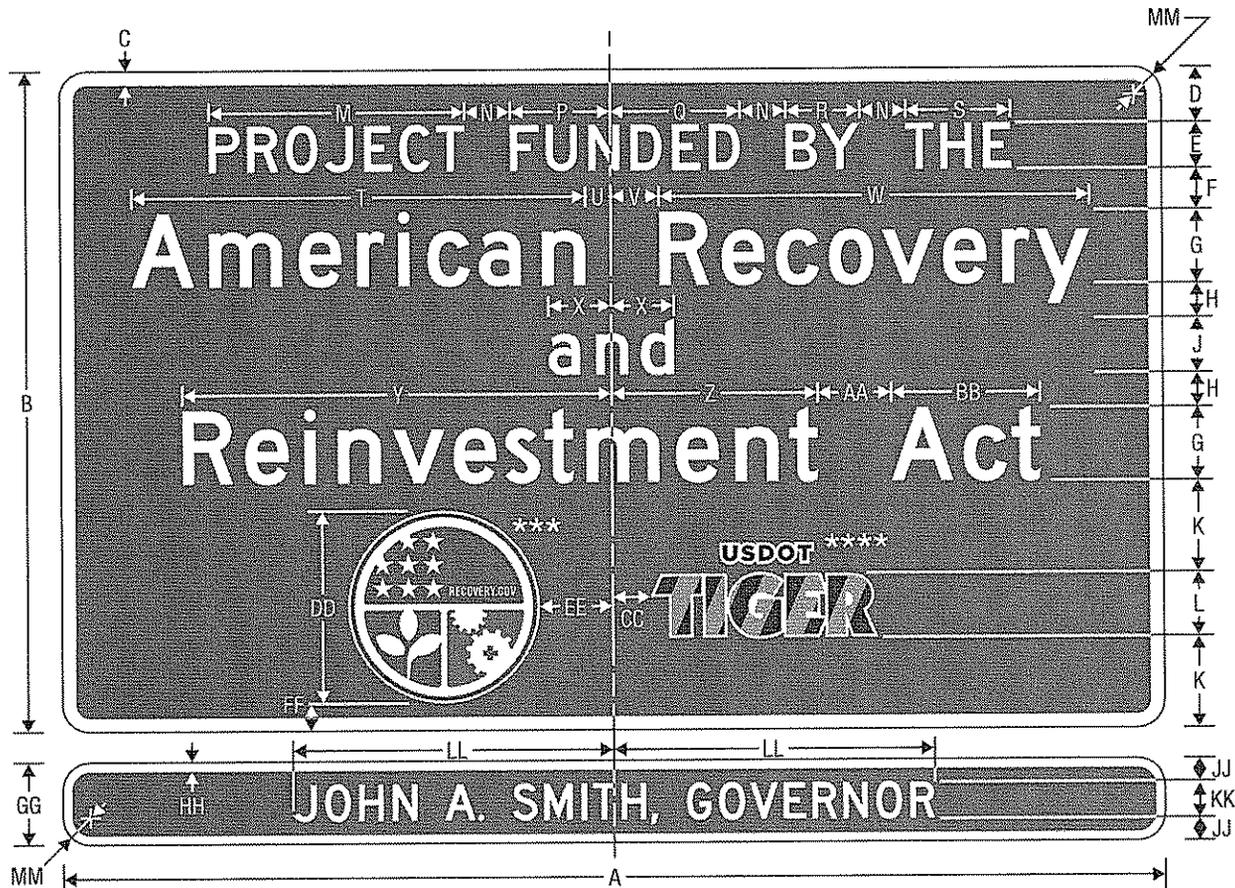

PROJECT FUNDING SOURCE SIGN AND GOVERNOR PLAQUE

NOTE: SIGN SHALL NOT BE INSTALLED WITHOUT PROJECT FUNDING SOURCE PLAQUE.


A	B	C	D	E	F	G	H	J	K	L	M	N	P
120	72	1.5	6	5 D	4.5	8 D*	3.75	6 D*(45LC)	10	7	27.917	5	10.831
84	54	1	5	4 C	3.5	6 C*	3	4 D*(3LC)	7.25	5	19.047	4	7.362

Q	R	S	T	U	V	W	X	Y	Z	AA	BB	CC	DD
14.087	8.106	11.556	49.42	2.742	5.258	46.904	6.812	46.76	22.472	8	16.288	4	21
9.484	5.162	7.763	31.722	2.415	3.585	30.552	4.542	30.911	14.737	6	10.175	3	15

EE	FF	GG	HH	JJ	KK	LL	MM
8	3	9	1	2.5	4 D**	VAR	3
6	2.25	9	.75	2.75	3.5 C	VAR	2.25

- * Increase character spacing 50%
- ** Series C may be used for longer legends
- *** See Pictograph page 4
- **** See Pictograph page 5

COLORS: LEGEND, BORDER - WHITE (RETROFLECTIVE)
 BACKGROUND - GREEN (RETROFLECTIVE)

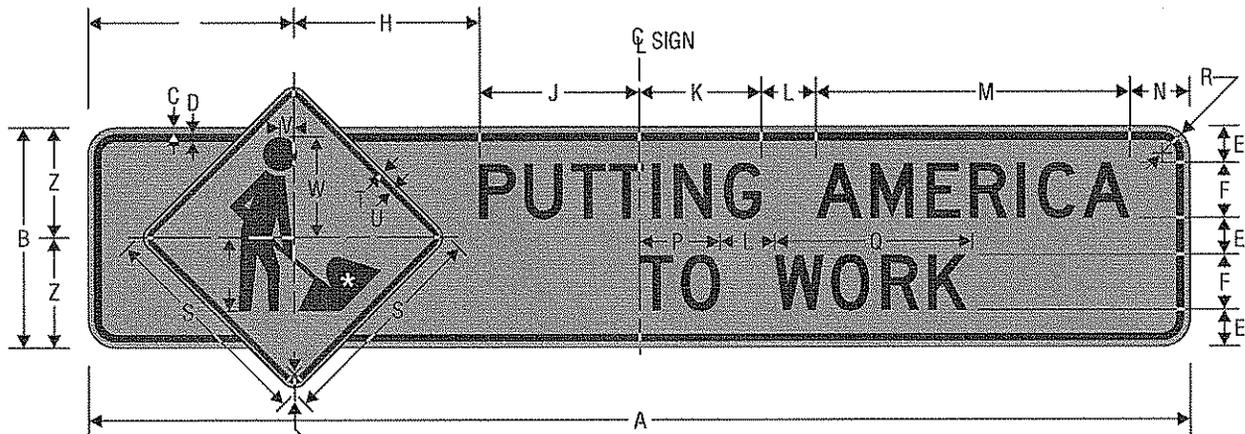

PROJECT FUNDING SOURCE PLAQUE

NOTE: PLAQUE SHALL NOT BE INSTALLED WITHOUT FUNDING SOURCE SIGN.

* See Standard Highway Signs Page 6-59 for symbol design.

A	B	C	D	E	F	G	H	J	K	L	M	N	P
120	24	0.625	0.875	4	6 D	22.349	20.370	17.281	13.28	6	34.22	6.5	8.765
84	18	0.375	0.625	3.5	4 D	16.607	15.686	9.707	10.667	4	22.813	5	5.843

Q	R	S	T	U	V	W	X	Y	Z
21.013	3	24	0.375	0.625	1.5	11	8	1.5	12
14.009	2.25	18	0.375	0.625	1	7	6	1.5	9

COLORS: LEGEND, BORDER — BLACK
 BACKGROUND — ORANGE (RETROREFLECTIVE)
 JS-33(R-1)



RECOVERY
Vector-based, Vinyl-Ready Pictograph

- | | |
|---------------------------|-------------------------|
| COLOR: LEGEND, OUTLINE | - WHITE (RETROFLECTIVE) |
| BORDER | - BLUE (RETROFLECTIVE) |
| BACKGROUND (UPPER) | - BLUE (RETROFLECTIVE) |
| BACKGROUND (LOWER RIGHT) | - RED (RETROFLECTIVE) |
| BACKGROUND (LOWER LEFT) | - GREEN (RETROFLECTIVE) |



USDOT TIGER
Vector-Based, Vinyl-Ready Pictograph

COLORS: OUTLINE - WHITE (RETROFLECTIVE)
USDOT LEGEND - BLACK
TIGER DIAGONALS - BLACK, ORANGE (RETROFLECTIVE)