



STATE OF RHODE ISLAND AND PROVIDENCE PLANTATIONS

Department of Administration
DIVISION OF PURCHASES
One Capitol Hill
Providence, RI 02908-5855

Tel: (401) 574-8100
Fax: (401) 574-8387
Website: www.purchasing.ri.gov

October 10, 2014

ADDENDUM NUMBER ONE

RFQ # 7549012

TITLE: Timber Pavilion and Parking Area Construction, DEM

Closing Date and Time: 10/22/14 at 2:00 PM (Note Change)

Per the issuance of this ADDENDUM #1 (3) pages, the following change(s) are noted:

Please be advised the Bid Closing Date and Time has been extended:

**From: 10/17/14 AT 2:00 PM
To: 10/22/14 AT 2:00 PM**

Specification Change /Addition / Clarification

Attached is Addendum Number One which answers the questions we received and provides some additional information regarding this bid.

NOTICE OF ADDENDUM NUMBER ONE (1)

TO

State of Rhode Island
DEM-Planning and Development Contract No. 14-14
Bid Number 7549012
Timber Pavilion and Parking Area Construction
Great Swamp Shooting Range
West Kingston, Rhode Island

DATE of ADDENDUM: **October 10th, 2014**

The contract documents are hereby modified to include this document as if fully attached thereto.

- ITEM A)** Section 13121 – Pre-Engineered Structures, Part 2 – Products, Section 2.3 - Accessories, **add** “C. The contractor shall provide six (6) cedar picnic tables on site in accordance with the provisions of the attached plan AD-1 entitled *Plan for ADA Accessible Picnic Tables*, dated October, 2014.”
- ITEM B)** Section 16210 – Solar Electric Installation, Part 2 – Products, Section 2.2 – Electric System Requirements, **add** “E. The contractor shall provide adequately sized enclosure(s), as determined by the design engineer, for the inverter(s) and battery bank meeting the standards of a NEMA 4X enclosure. All necessary enclosures shall be properly grounded and mounted on concrete foundations.”


Response to Questions:

Q1) There appears to be ledge protruding from the ground around the site. Should the contractors carry cost to remove obstructions when excavating for the pavilion foundations and the underground conduits, or will this be considered out-of-scope work to be addressed separately as-needed during construction?


The removal of ledge necessary for the installation of the pavilion foundation and/or the underground conduits will be considered out of the scope of the base bid work and will be treated separately during construction, if necessary.

Q2) Where is the solar electric equipment (modules, inverter, battery bank, etc.) to be located?


The solar modules shall be located on the south facing roof section of the new pavilion. The location of all other electrical components, including the inverter(s), battery bank, etc., shall be determined by the design engineer and submitted to the Owner for review and approval.

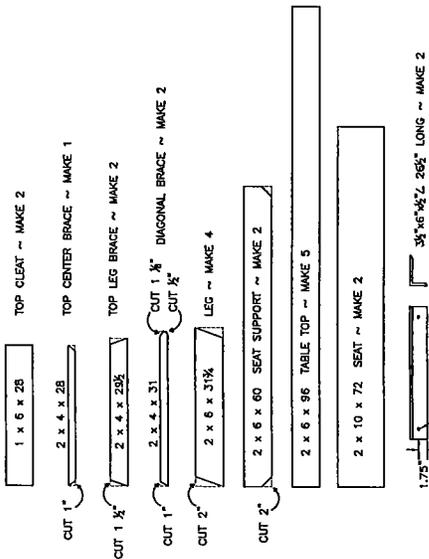


PARTS

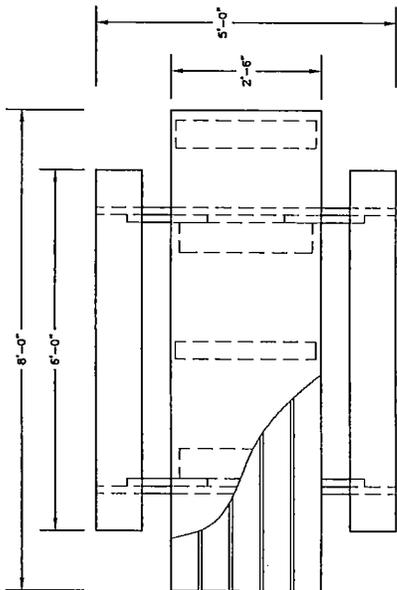

TOP VIEW

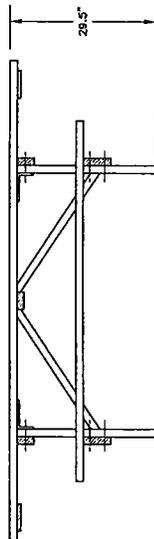

SIDE VIEW

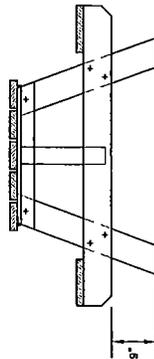

END VIEW

PARTS LIST PER TABLE.

- A. 1 PIECE 2x4x28 TOP CENTER BRACE
- B. 4 PIECES 2x6x31 1/4 LEGS
- C. 2 PIECES 2x4x29 1/2 TOP LEG BRACES
- D. 2 PIECES 1x6x28 TABLE TOP CLEATS
- E. 2 PIECES 2x4x31 DIAGONAL BRACES
- F. 2 PIECES 2x6x60 CROSS-BAR FOR SEAT
- G. 5 PIECES 2x6x96 TABLE TOP
- H. 2 PIECES 2x10x72 SEATS

- 2 PIECES 3 1/2\" x 6\" x 1/2\" HDG ANGLE IRON 28 1/2\" LONG
- 12 MACHINE BOLTS 3/8\" x 4 1/2\" HDG
- 24 WASHERS, 7/16\" HOLE
- FLAT HEAD WOOD SCREWS AS REQUIRED
- 3 1/2\" #12 STAINLESS STEEL
- 6d, 8d, & 10d NAILS AS REQUIRED
- ALL NAILS TO BE HOT-DIPPED GALVANIZED

ASSEMBLY NOTES:

1. ASSEMBLE TABLE TOP BY SPACING PLANKS B EVENLY ON CLEATS D AND TOP CENTER BRACE A. NAIL WITH 6d NAILS.
2. ASSEMBLE LEG UNITS WITH 8d NAILS TO HOLD SEAT CROSS-BAR F AND TOP LEG BRACE C IN POSITION ON LEGS B. BORE 7/16\" HOLE AND INSERT 3/8\" x 4\" LONG MACHINE BOLTS THROUGH TIMBER AND ANGLE IRON WITH WASHERS, BOTH ENDS.
3. SECURE ASSEMBLED TABLE TOP TO TOP LEG BRACE C ON LEG UNITS WITH TWENTY 3 1/2\" #12 SS FLAT HEAD WOOD SCREWS.
4. PLACE SEAT PLANK H FLUSH WITH ENDS OF SEAT CROSS-BARS F AND SECURE WITH TWELVE 3 1/2\" #12 SS FLAT HEAD SCREWS.
5. NAIL DIAGONAL BRACE E TO TOP CENTER BRACE A AND SEAT CROSS-BAR F WITH EIGHT 10d NAILS.