

July 2, 2015

STATE OF RHODE ISLAND AND PROVIDENCE PLANTATION
DEPARTMENT OF ADMINISTRATION

DIVISION OF PURCHASES BID NO. 7549693

RHODE ISLAND DEPARTMENT OF TRANSPORTATION

RHODE ISLAND CONTRACT NO.2015-CH-066

FEDERAL-AID PROJECT NO. FAP Nos: STP-RESF(301)

IR Improvements to Rt 116 Knotty Oak Road

Washington Street (Rte. 117) to Gervais Street

CITY/TOWN OF Coventry

COUNTY OF KENT

NOTICE TO PROSPECTIVE BIDDERS

ADDENDUM NO. 1 Prospective bidders and all concerned are hereby notified of the following changes in the Plans, Specifications, Proposal and Distribution of Quantities for this contract. These changes shall be incorporated in the Plans, Specifications, Proposal and Distribution of Quantities, and shall become an integral part of the Contract Documents.

A. Specifications - Job Specific

1. JS-i

Delete page JS-i in its entirety and replace it with revised page JS-i(R-1) attached to this Addendum No. 1. Code 903.9901 has been added to the index.

2. JS-53

Insert new page JS-53 attached to this Addendum No. 1. Code 903.9901 has been added to the contract.

B. Distribution of Quantities

1. Index Pages 1 & 2

Delete Index Pages 1 and 2 in their entirety and replace them with revised Index Pages 1(R-1) and 2 (R-1) attached to this Addendum No. 1. Items highlighted in bold have been revised or added to the contract.

2. Page 7

Delete Page 7 in its entirety and replace it with revised Page 7(R-1) attached to this Addendum No. 1. Item 410.1000 has been revised.

3. Page 7a

Insert new Page 7a attached to this Addendum No. 1. This page was generated by QUEST.

4. Page 9

Delete Page 9 in its entirety and replace it with revised Page 9(R-1) attached to this Addendum No. 1. Item 707.2000 has been revised.

5. Page 11

Delete Page 11 in its entirety and replace it with revised Page 11(R-1) attached to this Addendum No. 1. Item 713.8269 has been revised.

6. Page 11a

Insert new Page 11a attached to this Addendum No. 1. This page was generated by QUEST.

7. Page 12

Delete Page 12 in its entirety and replace it with revised Page 12 (R-1) attached to this Addendum No. 1. Item 713.8269 has been revised.

8. Page 12a

Insert new Page 12a attached to this Addendum No. 1. This page was generated by QUEST.

9. Page 28

Delete Page 28 in its entirety and replace it with revised Page 28 (R-1) attached to this Addendum No. 1. Item 903.9901 has been added to the contract.

10. Page 29

Insert new Page 29 attached to this Addendum No. 1. Items T20.2206, T20.2212 and T20.2304 have been added to the contract.


C. Drawings/Plans - Change/Addition

1. Sheet No. 7

Sheet No. 7 has been revised as shown on Sketch No. 1 attached to this Addendum No. 1.

2. Sheet No. 8

Sheet No. 8 has been revised as shown on Sketch No. 2 attached to this Addendum No. 1.



RI Department of Transportation
Chief Engineer

INDEX
SPECIFICATIONS – JOB SPECIFIC

(R-1)

<u>CODE</u>	<u>TITLE</u>	<u>PAGE</u>
105.02	Shop Drawings	JS-1
108.01	Prosecution and Progress Subletting of Contract	JS-3
108.03	Prosecution and Progress	JS-4
108.1000	Prosecution and Progress	JS-5
109.06	Measurement and Payment	JS-6
109.09	Acceptance and Final Payment	JS-7
206.9902	Catch Basin Inlet Protection	JS-8
212.1000	Maintenance and Cleaning of Erosion and Pollution Controls	JS-10
401.	Dense Graded Hot Mix Asphalt (HMA) Pavements	JS-11
401.	Dense Graded Hot Mix Asphalt (HMA) Pavements	JS-35
406.9901	Full Depth Reclamation with Bituminous Stabilizer	JS-36
413.9901	Rideability	JS-40
414.	Warm Mix Additive	JS-42
905.1000	Sidewalks	JS-43
906.9901	Precast Concrete Transition Curb for Wheelchair Ramps	JS-44
937.1000	Maintenance and Movement of Traffic Protection Devices	JS-45
938.1000	Price Adjustments	JS-46
943.0200	Trainee Man Hours	JS-47
L02.1000	Seeding	JS-51
T15.9901	Reflective Sign Post Panel (3"x72") Red	JS-52
T15.9902	Reflective Sign Post Panel (3"x72") Fluorescent Yellow	
903.9901	Erect and Maintain Temporary Snow Fence	JS-53

903.9901
ERECT AND MAINTAIN TEMPORARY SNOW FENCE

DESCRIPTION: This item shall consist of furnishing, erecting, maintaining, and removing temporary (snow) fence for the purpose of preventing workers, tools, and equipment from entering/being placed inside the Woodland Cemetery (aka Coventry Historical Cemetery No. 66). The fence shall be installed in accordance with Section 903 of the Rhode Island Standard Specifications for Road and Bridge Construction, Amended August 2013, with all revisions and as described herein, as directed or approved by the Engineer. The snow fence is not be used to protect or control vehicular traffic.

MATERIALS: Fencing shall consist of standard four foot high snow fencing utilizing standard steel posts to maintain the position of the fence. Materials for posts and post foundations, hardware, and appurtenances shall conform to the applicable requirements of **Section M.08; FENCE AND GUARDRAIL**, of the Rhode Island Standard Specifications for Road and Bridge Construction, Amended August 2013, with all revisions.

CONSTRUCTION METHODS: The fence shall be installed between the sidewalk and the existing line of granite posts, as shown on the Plans and/or as directed by the Engineer. Fence posts shall be located away from the existing granite posts and the fencing shall not be attached to the granite posts. Once the fence has been erected, the Contractor must maintain the fence throughout the period during which any construction activities are taking place adjacent to the cemetery. The fence and all related material will remain the property of the Contractor at the end of the contract and shall be removed from the site by the Contractor after any necessary grassed areas and plantings are established. All holes created by the posts shall be completely filled in the following removal of the posts.

METHOD OF MEASUREMENT: Item 903.9901 "Erect and Maintain Temporary Snow Fence" will be measured for payment by linear foot of temporary snow fence actually installed, in accordance with the Plans and/or as directed by the Engineer.

BASIS OF PAYMENT: The accepted quantity of "Erect and Maintain Temporary Snow Fence" will be paid for at its respective contract unit price per linear foot as listed in the Proposal. The price so-stated constitutes full and complete compensation for all labor, materials, tools, and equipment, and for all incidentals required to finish the work, as described in these Special Provisions and elsewhere in the contract documents, complete and accepted by the Engineer. No extra payment shall be made for maintaining/resetting or removing the fence.

Table of Contents - Distribution of Quantities

Project Name - IR Improvements to Rt 116 Knotty Oak Road

Estimate Name - Addendum No.1

R.I. Contract No. - 2015-CH-066

FAP Nos: STP-RESF(301)

ItemCode	Description	Page
201.0402	REMOVE AND DISPOSE CONCRETE CURB	1
201.0403	REMOVE AND DISPOSE SIDEWALKS	1
201.0409	REMOVE AND DISPOSE FLEXIBLE PAVEMENT	2
201.0415	REMOVE AND DISPOSE GUARDRAIL AND POST ALL TYPES	2
201.0428	REMOVE AND DISPOSE FRAME AND GRATE OR FRAME AND COVER	2
201.0610	REMOVE AND DISPOSE DIRECTIONAL, WARNING, REGULATORY, SERVICE, AND STREET SIGNS	3
202.0100	EARTH EXCAVATION	4
204.0100	TRIMMING AND FINE GRADING	4
206.0301	COMPOST FILTER SOCK	4
206.9902	CATCH BASIN INLET PROTECTION	5
212.2000	CLEANING AND MAINTENANCE OF EROSION CONTROLS	6
302.0100	GRAVEL BORROW SUBBASE COURSE	6
401.1110	MODIFIED CLASS 19.0 HMA WITH PAY ADJUSTMENTS	6
401.2110	MODIFIED CLASS 12.5 HMA WITH PAY ADJUSTMENTS	6
401.3000	CLASS 9.5 HMA	7
403.0300	ASPHALT EMULSION TACK COAT	7
406.9901	FULL DEPTH RECLAMATION WITH EMULSION	7
410.1000	TEMPORARY PATCHING MATERIAL/TRENCHES	7
414.0100	WARM MIX ADDITIVE	7
601.0300	CLASS A PORTLAND CEMENT CONCRETE	7
702.0516	FRAME AND GRATE, HIGH CAPACITY, STANDARD 6.3.4	8
702.0533	PRECAST CONCRETE APRON STONE 38'' STANDARD 7.1.8	9
704.0100	RECONSTRUCT CATCH BASIN/CORBEL CONES	9
707.0900	ADJUST MANHOLES TO GRADE	9
707.2000	ADJUST FRAME AND GRATE TO GRADE	9
708.9040	CLEANING AND FLUSHING PIPE ALL SIZES	10
708.9041	CLEANING CATCH BASINS ALL TYPES AND SIZES	10
708.9042	CLEANING MANHOLES ALL TYPES AND SIZES	10
712.0100	WATER GATE BOX	10
712.0200	GAS GATE BOX	11
713.8268	ADJUST CURB STOP BOX TO GRADE	11
713.8269	ADJUST WATER GATE BOXES TO GRADE	11
713.8300	ADJUST GAS GATE BOXES TO GRADE	12
901.0101	GUARDRAIL STEEL BEAM SINGLE FACE EARTH AND ASPHALT	12
901.0191	GUARDRAIL STEEL BEAM ANCHORAGE TRAILING END SECTION STANDARD 34.3.4	12
901.0198	GUARDRAIL END TREATMENT, NON-ENERGY ABSORBING TERMINAL	13
905.0110	PORTLAND CEMENT SIDEWALK MONOLITHIC STANDARD 43.1.0	13
905.0115	PORTLAND CEMENT CONCRETE DRIVEWAY STANDARD 43.5.0	13
906.0210	CEMENT CONCRETE CURB PRECAST STRAIGHT STANDARD 7.1.0	14
906.0211	CEMENT CONCRETE CURB PRECAST CIRCULAR STANDARD 7.1.0	14
906.0221	6' PRECAST CONCRETE TRANSITION CURB STANDARD 7.1.2	15
906.0260	PRECAST CONCRETE RAMP STONE 12-INCH STRAIGHT STANDARD 7.1.9	16
906.0261	PRECAST CONCRETE RAMP STONE 12-INCH CIRCULAR STANDARD 7.1.9	16
906.0280	3' PRECAST CONCRETE TRANSITION CURB STANDARD 7.1.1	16
906.9901	PRECAST CONCRETE TRANSITION CURB FOR WHEELCHAIR RAMPS	17
907.0100	WATER FOR DUST CONTROL	17
914.5010	FLAGPERSONS	18
914.5020	FLAGPERSONS - OVERTIME	18
922.0100	TEMPORARY CONSTRUCTION SIGNS STANDARD 29.1.0 AND 27.1.1	18
923.0105	DRUM BARRICADE STANDARD 26.2.0	19
923.0120	PLASTIC PIPE BARRICADE STANDARD 26.3.0	19
923.0200	FLUORESCENT TRAFFIC CONES STANDARD 26.1.0	19

Table of Contents - Distribution of Quantities

Project Name - 1R Improvements to Rt 116 Knotty Oak Road

Estimate Name - Addendum No.1

R.I. Contract No. - 2015-CH-066

FAP Nos: STP-RESF(301)

ItemCode	Description	Page
925.0112	PORTABLE CHANGEABLE MESSAGE SIGN	19
929.0110	FIELD OFFICE	19
932.0100	CUTTING AND MATCHING ASPHALT	20
932.0200	FULL-DEPTH SAWCUT OF BITUMINOUS PAVEMENT	20
932.0220	FULL DEPTH SAWCUT OF BITUMINOUS SIDEWALK/DRIVEWAY	20
932.0230	FULL DEPTH SAWCUT OF PORTLAND CEMENT CONCRETE SIDEWALK/DRIVEWAY	21
936.0100	MOBILIZATION AND DEMOBILIZATION	22
937.0200	MAINTENANCE AND MOVEMENT TRAFFIC PROTECTION	22
942.0200	DETECTABLE WARNING PANEL STANDARD 48.1.0	22
943.0200	TRAINEE MAN-HOURS	23
L01.0102	LOAM BORROW 4 INCHES DEEP	23
L02.0102	RESIDENTIAL SEEDING (TYPE 2)	23
T15.0100	DIRECTIONAL REGULATORY AND WARNING SIGNS	23
T15.1000	STREET SIGN ASSEMBLY STD. 24.6.1	25
T15.2000	PARKING SIGNS	25
T15.9901	REFLECTIVE SIGN POST PANEL (3"X72") RED	25
T15.9902	REFLECTIVE SIGN POST PANEL (3"X72") FLUORESCENT YELLOW	25
T20.0006	6 INCH WHITE FAST - DRYING WATERBORNE PAVEMENT MARKING PAINT	26
T20.0012	12 INCH WHITE FAST - DRYING WATERBORNE PAVEMENT MARKING PAINT	26
T20.0104	4 INCH YELLOW FAST - DRYING WATERBORNE PAVEMENT MARKING PAINT	26
T20.1106	6 INCH TEMPORARY WATERBORNE PAINT PAVEMENT MARKINGS WHITE	26
T20.1112	12 INCH TEMPORARY WATERBORNE PAINT PAVEMENT MARKINGS WHITE	26
T20.1204	4 INCH TEMPORARY WATERBORNE PAINT PAVEMENT MARKINGS YELLOW	27
T20.2006	6 INCH EPOXY RESIN PAVEMENT MARKINGS WHITE	27
T20.2012	12 INCH EPOXY RESIN PAVEMENT MARKINGS WHITE	27
T20.2014	4 INCH EPOXY RESIN PAVEMENT MARKINGS YELLOW	28
T20.9948	EPOXY RESIN PAVEMENT MARKING WORD "SCHOOL"	28
903.9901	ERECT AND MAINTAIN TEMPORARY SNOW FENCE	28
T20.2206	6 INCH TEMPORARY EPOXY RESIN PAVEMENT MARKINGS WHITE	29
T20.2212	12 INCH TEMPORARY EPOXY RESIN PAVEMENT MARKINGS WHITE	29
T20.2304	4 INCH TEMPORARY EPOXY RESIN PAVEMENT MARKINGS YELLOW	29

Distribution of Quantities

Project Name - 1R Improvements to Rt 116 Knotty Oak Road
 Estimate Name - Addendum No.1
 R.I. Contract No. - 2015-CH-066
 FAP Nos: STP-RESF(301)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
015	401.3000	CLASS 9.5 HMA KNOTTY OAK ROAD	TON			
		FROM ITEM 932.0220 (BCD-1)		12.00	0006	01
		Item 401.3000 Total:		12.00		
016	403.0300	ASPHALT EMULSION TACK COAT KNOTTY OAK ROAD	SY			
		FROM ITEM 406.9901		25,540.00	0006	01
		Item 403.0300 Total:		25,540.00		
017	406.9901	FULL DEPTH RECLAMATION WITH EMULSION KNOTTY OAK ROAD	SY			
		1+00 - 64+00		24,710.00	0006	01
		SITE STREETS		830.00	0006	01
		Item 406.9901 Total:		25,540.00		
018	410.1000	TEMPORARY PATCHING MATERIAL/TRENCHES KNOTTY OAK ROAD	TON			
		AS DIRECTED BY THE ENGINEER		40.00	0006	01
		FROM ITEM 905.0115		50.00	0006	01
		FROM ITEM 932.0100		15.00	0006	01
		Item 410.1000 Total:		105.00		
019	414.0100	WARM MIX ADDITIVE KNOTTY OAK RD	EACH			
		FROM ITEM 401.1110		4,775.00	0006	01
		FROM ITEM 401.2110		3,310.00	0006	01
		Item 414.0100 Total:		8,085.00		
020	601.0300	CLASS A PORTLAND CEMENT CONCRETE KNOTTY OAK ROAD	CY			

Distribution of Quantities

Project Name - 1R Improvements to Rt 116 Knotty Oak Road
 Estimate Name - Addendum No.1
 R.I. Contract No. - 2015-CH-066
 FAP Nos: STP-RESF(301)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
020	601.0300	Cont.		4.00	0006	01
		FROM ITEM 906.0210				
		FROM ITEM 906.0211		5.00	0006	01

Distribution of Quantities

Project Name - 1R Improvements to Rt 116 Knotty Oak Road

Estimate Name - Addendum No.1

R.I. Contract No. - 2015-CH-066

FAP Nos: STP-RESF(301)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
021	702.0516	Cont.				
		55+20 RT		1.00	0006	01
		56+64 LT		1.00	0006	01
		58+40 RT		1.00	0006	01
		58+47 LT		1.00	0006	01
		60+15 RT		1.00	0006	01
Item 702.0516 Total:				30.00		
022	702.0533	PRECAST CONCRETE APRON STONE 38''	EACH			
		STANDARD 7.1.8				
		KNOTTY OAK ROAD				
		39+74 LT		1.00	0006	01
		58+47 LT		1.00	0006	01
Item 702.0533 Total:				2.00		
023	704.0100	RECONSTRUCT CATCH BASIN/CORBEL	EACH			
		CONES				
		KNOTTY OAK RD				
		47+65 LT		1.00	0006	01
		AS DIRECTED BY THE ENGINEER		4.00	0006	01
Item 704.0100 Total:				5.00		
024	707.0900	ADJUST MANHOLES TO GRADE	EACH			
		KNOTTY OAK ROAD				
		09+40 LT		2.00	0006	01
		38+00 RT		2.00	0006	01
Item 707.0900 Total:				4.00		
025	707.2000	ADJUST FRAME AND GRATE TO GRADE	EACH			
		KNOTTY OAK ROAD				
		18+08 RT		2.00	0006	01
		47+65 LT		2.00	0006	01
		FROM ITEM 702.0516		30.00	0006	01
Item 707.2000 Total:				34.00		

Distribution of Quantities

Project Name - 1R Improvements to Rt 116 Knotty Oak Road

Estimate Name - Addendum No.1

R.I. Contract No. - 2015-CH-066

FAP Nos: STP-RESF(301)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
030	712.0200	GAS GATE BOX	EACH			
		KNOTTY OAK ROAD				
		AS DIRECTED BY THE ENGINEER		2.00	0006	01
		Item 712.0200 Total:		2.00		
031	713.8268	ADJUST CURB STOP BOX TO GRADE	EACH			
		KNOTTY OAK ROAD				
		06+20 RT		1.00	0006	01
		14+50 RT		1.00	0006	01
		Item 713.8268 Total:		2.00		
032	713.8269	ADJUST WATER GATE BOXES TO GRADE	EACH			
		KNOTTY OAK ROAD				
		06+00 RT		1.00	0006	01
		06+40 LT		1.00	0006	01
		06+45 LT		1.00	0006	01
		09+45 RT		1.00	0006	01
		09+56 RT		1.00	0006	01
		09+66 RT		1.00	0006	01
		09+70 RT		1.00	0006	01
		14+15 RT		1.00	0006	01
		14+45 RT		1.00	0006	01
		22+68 RT		1.00	0006	01
		22+90 RT		1.00	0006	01
		22+95 RT		1.00	0006	01
		29+60 LT		1.00	0006	01
		2ND ADJUSTMENT PRIOR TO		31.00	0006	01
		SURFACE COURSE				
		37+52 RT		1.00	0006	01
		38+10 RT		1.00	0006	01
		42+40 LT		1.00	0006	01
		46+32 RT		1.00	0006	01
		47+57 RT		1.00	0006	01

Distribution of Quantities

Project Name - 1R Improvements to Rt 116 Knotty Oak Road

Estimate Name - Addendum No.1

R.I. Contract No. - 2015-CH-066

FAP Nos: STP-RESF(301)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
032	713.8269	Cont.		1.00	0006	01
		55+38 RT				
		58+40 LT		1.00	0006	01

Distribution of Quantities

Project Name - 1R Improvements to Rt 116 Knotty Oak Road

Estimate Name - Addendum No.1

R.I. Contract No. - 2015-CH-066

FAP Nos: STP-RESF(301)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
032	713.8269 Cont.	62+15 RT		1.00	0006	01
		62+70 LT		1.00	0006	01
		62+80 RT		1.00	0006	01
		63+05 RT		1.00	0006	01
		63+30 RT		1.00	0006	01
		63+55 RT		1.00	0006	01
		63+65 LT/RT		2.00	0006	01
		63+70 RT		1.00	0006	01
		63+80 RT		2.00	0006	01
Item 713.8269 Total:				62.00		
033	713.8300	ADJUST GAS GATE BOXES TO GRADE	EACH			
		KNOTTY OAK ROUTE				
		09+52 LT		1.00	0006	01
		09+55 LT		1.00	0006	01
		14+50 LT		1.00	0006	01
		23+23 RT		1.00	0006	01
		2ND ADJUSTMENT PRIOR TO		9.00	0006	01
		SURFACE COURSE				
		42+18 LT		1.00	0006	01
		42+30 RT		1.00	0006	01
		47+27 LT		1.00	0006	01
		50+70 LT		1.00	0006	01
		63+50 RT		1.00	0006	01
Item 713.8300 Total:				18.00		
S034	901.0101	GUARDRAIL STEEL BEAM SINGLE FACE	LF			
		EARTH AND ASPHALT				
		KNOTTY OAK ROAD				
		60+87 - 60+93 LT		6.00	0006	01
Item 901.0101 Total:				6.00		
S035	901.0191	GUARDRAIL STEEL BEAM ANCHORAGE	EACH			

Distribution of Quantities

Project Name - 1R Improvements to Rt 116 Knotty Oak Road
 Estimate Name - Addendum No.1
 R.I. Contract No. - 2015-CH-066
 FAP Nos: STP-RESF(301)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
S035	901.0191	Cont. TRAILING END SECTION STANDARD				
		34.3.4				

Distribution of Quantities

Project Name - 1R Improvements to Rt 116 Knotty Oak Road

Estimate Name - Addendum No.1

R.I. Contract No. - 2015-CH-066

FAP Nos: STP-RESF(301)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
S077	T20.2012	Cont.				
		@ WALNUT HILL RD		15.00	0006	01
		@ WHITE ROCK RD		10.00	0006	01
		X-WALK				
		@ FOSTER DR		72.00	0006	01
		@ GERVAIS		140.00	0006	01
		@ HIGHWOOD DR		126.00	0006	01
		@ LONG POND RD		90.00	0006	01
		@ MAPLE DR		66.00	0006	01
		@ REGENT ST		48.00	0006	01
		@ SPRING VALLEY RD		54.00	0006	01
		@ WALNUT HILL RD		72.00	0006	01
		@ WHITE ROCK RD		48.00	0006	01
Item T20.2012 Total:				1,028.00		
S078	T20.2014	4 INCH EPOXY RESIN PAVEMENT	LF			
		MARKINGS YELLOW				
		KNOTTY OAK ROAD				
		CENTERLINE		11,400.00	0006	01
		SIDE STREETS		800.00	0006	01
Item T20.2014 Total:				12,200.00		
S079	T20.9948	EPOXY RESIN PAVEMENT MARKING WORD	EACH			
		"SCHOOL"				
		KNOTTY OAK ROAD				
		20+45		1.00	0006	01
		5+88		1.00	0006	01
Item T20.9948 Total:				2.00		
080	903.9901	ERECT AND MAINTAIN TEMPORARY SNOW	LF			
		FENCE				
		KNOTTY OAK RD				
		1+00-6+10 LF		510.00	0006	01
Item 903.9901 Total:				510.00		

Distribution of Quantities

Project Name - 1R Improvements to Rt 116 Knotty Oak Road


Estimate Name - Addendum No.1

R.I. Contract No. - 2015-CH-066

FAP Nos: STP-RESF(301)


Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
081	T20.2206	6 INCH TEMPORARY EPOXY RESIN PAVEMENT MARKINGS WHITE PROJECT WIDE FROM ITEM T20.2006	LF	11,400.00	0006	01
Item T20.2206 Total:				11,400.00		
082	T20.2212	12 INCH TEMPORARY EPOXY RESIN PAVEMENT MARKINGS WHITE PROJECT WIDE FROM ITEM T20.2012	LF	1,028.00	0006	01
Item T20.2212 Total:				1,028.00		
083	T20.2304	4 INCH TEMPORARY EPOXY RESIN PAVEMENT MARKINGS YELLOW PROJECT WIDE FROM ITEM T20.2014	LF	11,400.00	0006	01
Item T20.2304 Total:				11,400.00		

F:\FILES\CAD\13961073J HIGHWAY PLANS\0173J_V1_007_GEN1-ADD_01.dwg, 6/29/2015 8:40:33 AM, USER68, 1:1

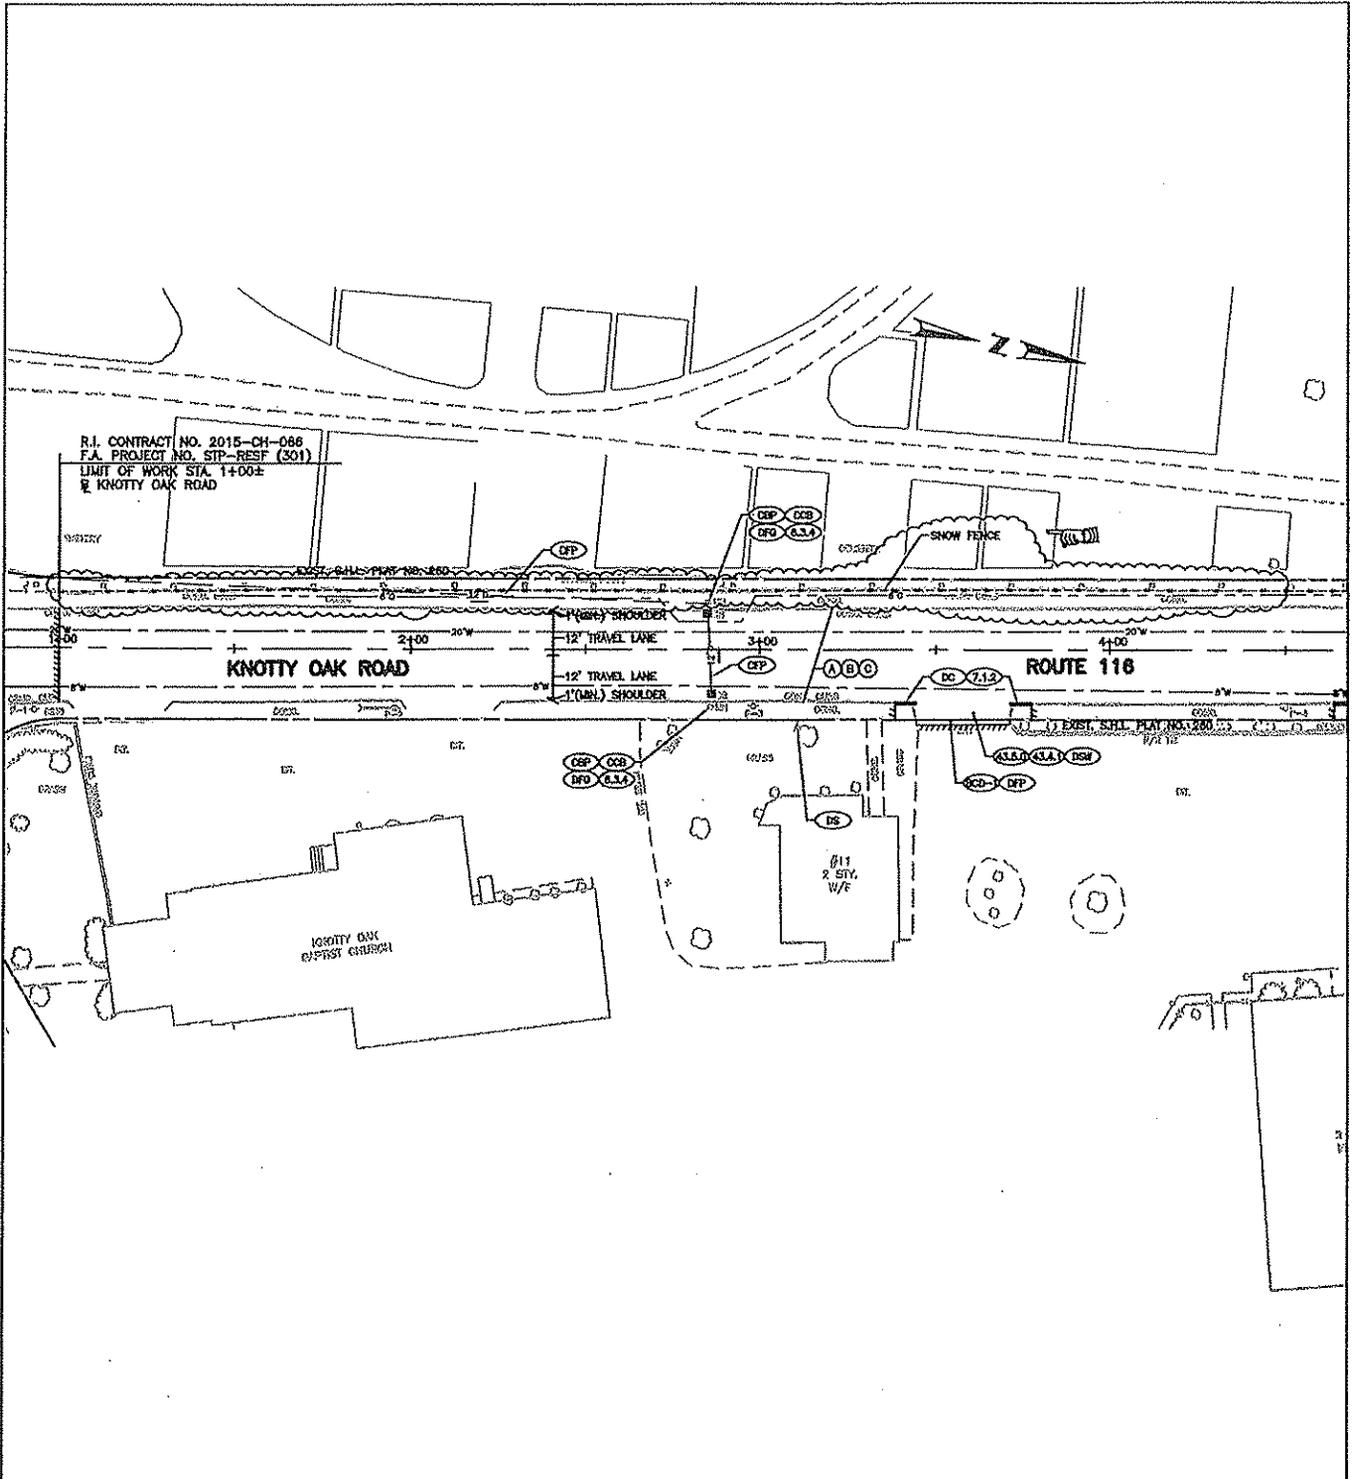

 <p>Gordon R. Archibald, Inc. Civil and Environmental Engineers Pawtucket, Rhode Island</p>	<p>TITLE OF SKETCH 1R HIGHWAY SAFETY IMPROVEMENTS KNOTTY OAK ROAD ROUTE 116 GENERAL PLAN - 1</p>	<p>R.I. CONTRACT NO. 2015-CH-066</p>
		<p>SKETCH NO. 1</p>
<p>DATE: 6/29/2015</p>	<p>ADDENDUM NUMBER 1</p>	<p>REVISION TO VOL. 1 OF 1 SHEET NO. 7</p>

F:\FILES\CAD\13960173\1_HIGHWAY PLANS\0173J_V1_008_GEN2_ADD_01.dwg, 7/22/2015 9:02:46 AM, USER68, 1:1

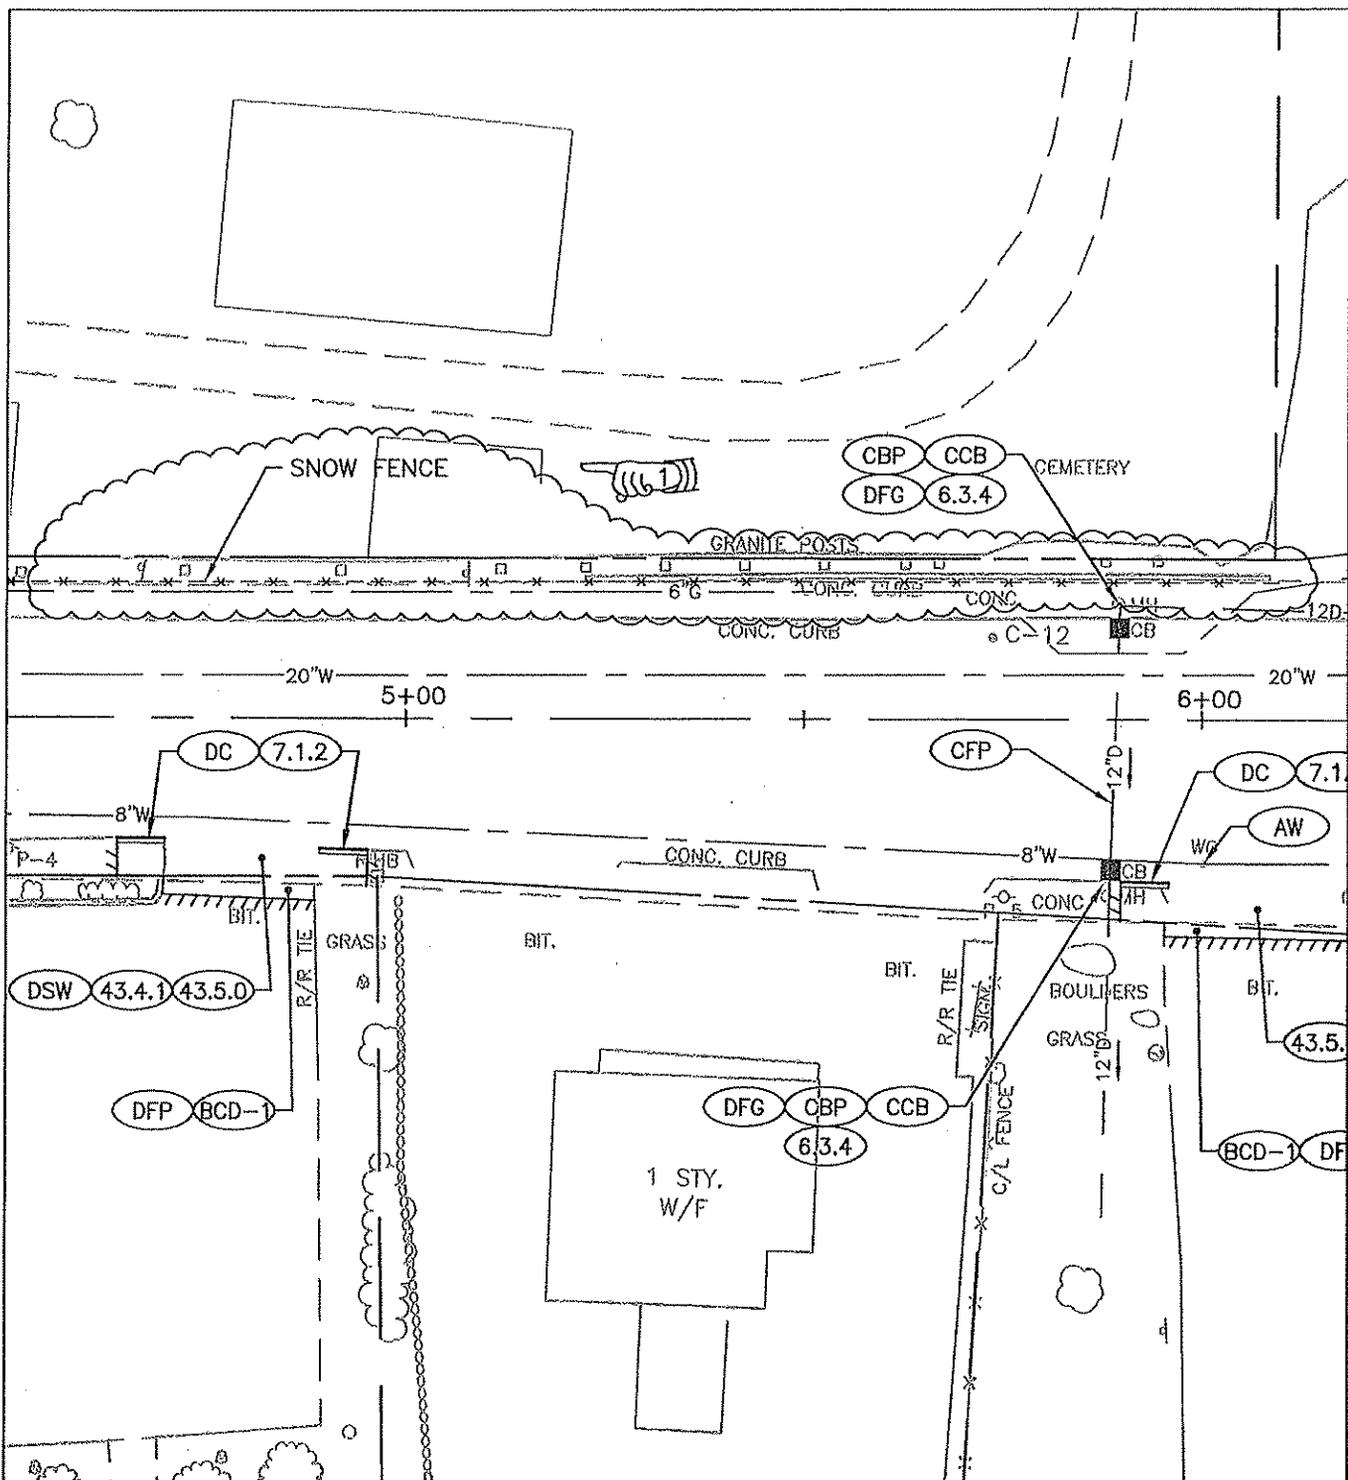

 Gordon R. Archibald, Inc. Civil and Environmental Engineers Pawtucket, Rhode Island	TITLE OF SKETCH 1R HIGHWAY SAFETY IMPROVEMENTS KNOTTY OAK ROAD ROUTE 116	R.I. CONTRACT NO. 2015-CH-066
	GENERAL PLAN - 2	SKETCH NO. 2
DATE: 6/29/2015	ADDENDUM NUMBER 1	REVISION TO VOL. 1 OF 1 SHEET NO. 8