



**State of Rhode Island
Department of Administration / Division of Purchases
One Capitol Hill, Providence, Rhode Island 02908-5855
Tel: (401) 574-8100 Fax: (401) 574-8387**

February 11, 2020

ADDENDUM # 2

Bid # 7599798

Title: Fabrication and Installation of Sign for Bristol Armory

Bid Closing Date & Time: February 18, 2020, 2020 at 11:00 AM

Notice to Vendors:


REVISED Bid Closing Date

Clarification on sign posts in Statement of Work, Picture and statement below

The frame (“poles”) are 3”x3” square extruded aluminum (QTY 2), milled / prepped and factory painted finished baked enamel (Color: Black), with breakaway load concentrating couplers since it’ll be close to a public road and according to DOT regulations.

**Kathy Missell
Chief Buyer**

Interested parties should monitor this website, on a regular basis, for any additional information that may be posted.

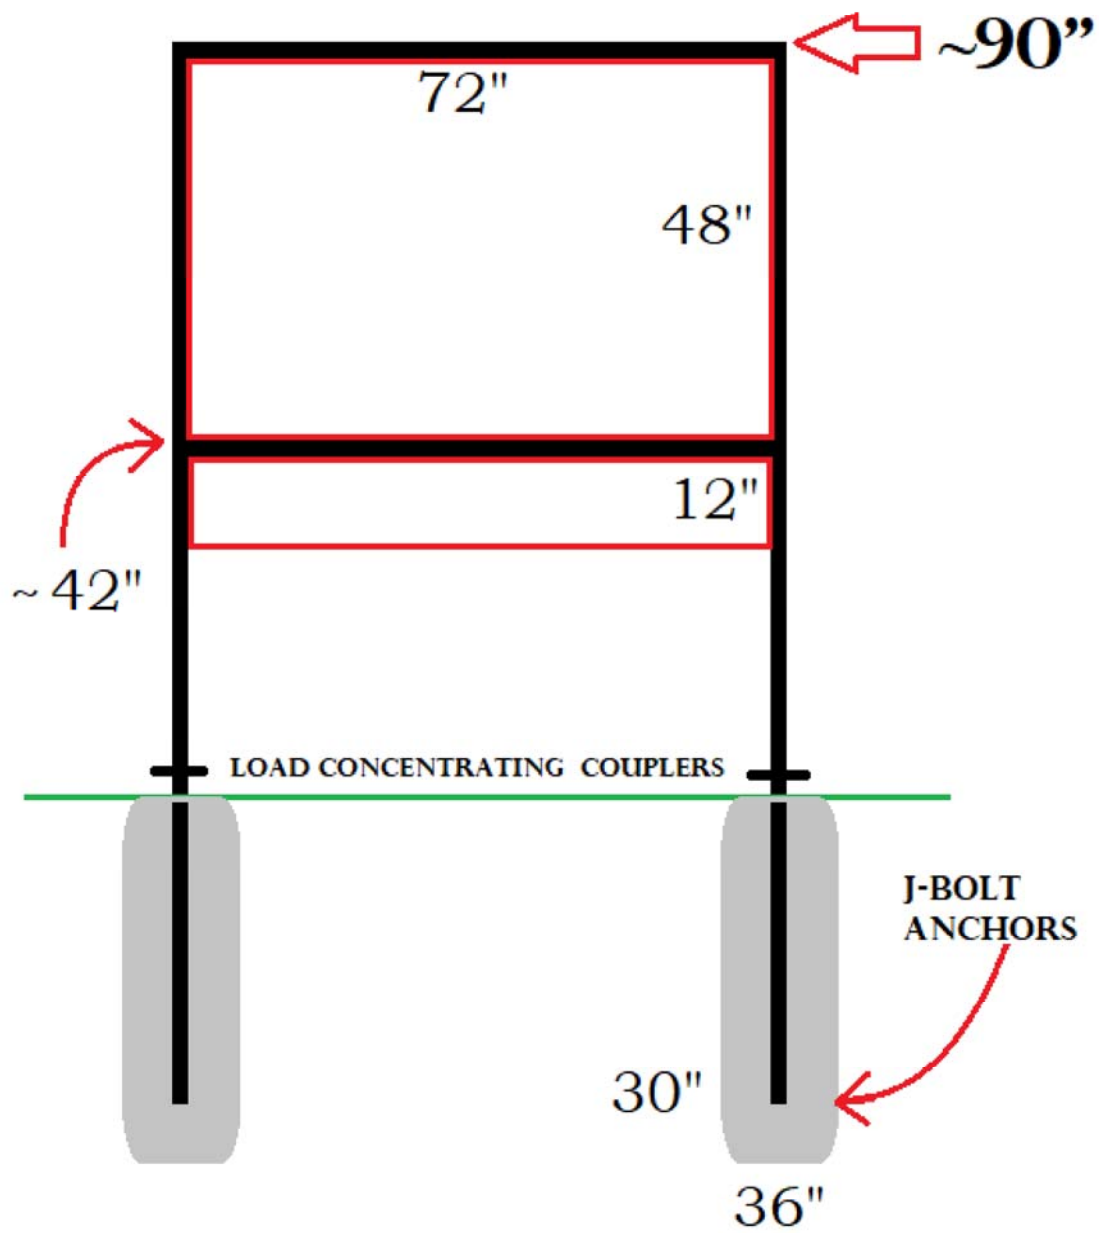

STATEMENT OF WORK

BRISTOL ARMORY BUILDING SIGN

SCOPE: The overview of the work to be accomplished in this project consists of the fabrication and installation of a new 48" inch by 72" inch double faced aluminum building sign for Bristol Armory mounted in a 3" inch by 3" inch extruded aluminum frame. Provide a Secondary Sign, 12" x 72" Commander / First Sergeant with four aluminum Removable / Replaceable Name Plates mounted below Main Facility Sign.

LOCATION: Bristol Armory, 470 Metacom Ave, Bristol, RI 02809

WORK TO BE ACCOMPLISHED:

- a) Fabrication and Installation of sign to specifications provided; this is a military installation.
- b) Graphic design, typesetting, design time, drawings for approval, meetings, site survey, and electronic files for production will all need to be coordinated and approved by Agency.

Main Facility Sign (Double Sided)

- c) Size: 48" inch x 72" inch x 2"- 3" deep aluminum frame with 090 aluminum faces
- d) Frame and panels to be milled / prepped and painted
 - a. Factory finished baked enamel. Color: Scarlet Red
- e) Two (2) graphic images:
 - a. Size: 48" inch x 72" inch digital print with UV Laminated printed on premium vinyl - copy as required
 - b. Colors: **Scarlet Red** Background with **Yellow Gold** Copy with **Black** Outline
 - c. Crossed Cannons to be **Gold Leaf** (2)

Secondary Sign (Double Sided)

- f) Size: 12" x 96" x 2"- 3" deep aluminum frame with 090 aluminum faces
- g) Two (2) graphic images
 - a. Size: 12" x 72" digital print with UV Laminate
 - b. Colors; Scarlet Red Background with Yellow Gold Copy as required with Black Outline
 - c. Removable Name Plates (4); 6" x 24" aluminum, Copy to match Main Sign.
 - d. Name plates shall have aluminum channel slides, matched to background.

Frame (Aluminum)

- h) Mill / prep, prime and paint new 3" x 3" extruded aluminum framework.
- i) Frame to be milled / prepped and painted
 - a. Factory finished baked enamel; Color: Black
- j) Frame requires breakaway load concentrating couplers to meet federal DOT regulations.

Aluminum (Panels)

- k) All aluminum shall be of the best commercial quality and shall be straight and true. There shall be no scratches, scars, creases or buckles.
- l) Prior to application of baked enamel finish, surface shall be cleaned and primed according to manufacturer's specification.

- m) Prior to application of sheeting, surface shall be degreased and etched according to manufacturer's specifications.
- n) Mounting hardware for aluminum signs shall be hardened aluminum, 6061-T6 alloy

Paint

- o) Two color coats of enamel shall be applied and baked according to the manufacturer's instructions for the substrate specified.

Foundation

- p) Concrete foundations shall withstand all wind, water, ice and similar forces. All foundations shall be capped and flush with the ground level. All concrete shall be poured at least 3,000 psi.
- q) Footing shall be 12" inch diameter, 36" inches deep, with Post J-Bolt Anchors 30" inches deep
- r) Remove waste materials and other work generated debris from the worksite each work day.
- s) *Line item pricing; please annotate labor & materials when providing quote.*

TOURS OF THE JOB SITE: Tour of the job site is not required to place a quote on this project, however the site may be inspected by appointment by contacting SFC Joe Spinelli at (401) 275-4081 (office), (401) 626-2002 (work cell) or email to joseph.a.spinelli2.mil@mail.mil

SAFETY: The areas where the work is to be performed may be in use at all times, therefore the Contractor will protect the worksite to minimize any danger to pedestrians in the area.

WORKMANSHIP: All work shall be performed by qualified mechanics of the trade involved. All work shall be neat, trim, straight, secured and finished in all details. Any work that damages existing infrastructure will be repaired at no additional cost to the State or Federal Government.

GUARANTEE: The Contractor will guarantee all work for a period of 1 (one) year after acceptance.

NOTIFICATION: The Construction & Facilities Management Office (CFMO) shall be notified when work is to begin and shall be kept informed of the Contractor's finished work schedule.

APPROVAL of MATERIAL: Specifications or manufacture's cuts of material to be used on this project shall be submitted to the CFMO for approval prior to both fabrication and installation.

STATE BUILDING CODE: This project is subject to the rules and regulations of the Rhode Island Building Commissioner and is subject to inspection by that officer. The Contractor will obtain, if necessary a building permit for this work from the Building Commissioner's office. A copy of this permit will be forwarded to the CFMO.

STATE PROVISIONS: In addition to these provisions, the Office of Purchases may issue other instructions that must be followed.

MATERIALS: All materials to be incorporated into the project shall be furnished and installed new by the Contractor.

FINAL ACCEPTANCE: The Owner will inspect all work prior to final acceptance and note any deficiencies found so the Contractor can re-work them.