

April 23, 2010

STATE OF RHODE ISLAND AND PROVIDENCE PLANTATION  
DEPARTMENT OF TRANSPORTATION  
RHODE ISLAND CONTRACT NO.2010-CH-020  
FEDERAL-AID PROJECT NO. FAP Nos: STP-SDRP(008)

**Statewide Stormdrain Retrofit Project - BMP Monitoring**

Statewide

CITY/TOWN OF Statewide

COUNTY OF STATEWIDE

NOTICE TO PROSPECTIVE BIDDERS

ADDENDUM NO. 3 Prospective bidders and all concerned are hereby notified of the following changes in the Plans, Specifications, Proposal and Distribution of Quantities for this contract. These changes shall be incorporated in the Plans, Specifications, Proposal and Distribution of Quantities, and shall become an integral part of the Contract Documents.

**A. Contract Documents**

1. Federal Wages Rates

Delete Federal Wage Rate pages 1-12 in their entirety and replace with revised pages 1-12 (R-1) attached to this Addendum No. 3.

**B. Drawings/Plans - Change/Addition**

01. Sheet 10 - Drainage and Utility Plan No. 4 Cranston BMP\_SC\_020

Modify this sheet as shown in Sketch No. 1 attached to this Addendum No. 3. A callout for 4" Plantable Soil and Seed has been added.

02. Sheet 13 - Drainage and Utility Plan No. 7 Cranston BMP\_SC\_120

Modify this sheet as shown in Sketch No. 2 attached to this Addendum No. 3. A callout to Attach Frame and Cover to Drainage Structure has been added.

03. Sheet 14 - Drainage and Utility Plan No. 08 Exeter BMP\_SC\_055

Modify this sheet as shown in Sketch No. 3 attached to this Addendum No. 3. The existing structure has been revised. The callout to clean the existing structure has been revised.

04. Sheet 15 - Drainage and Utility Plan No. 09 Foster BMP\_SC\_027

Modify this sheet as shown in Sketch No. 4 attached to this Addendum No. 3. A callout to Reconstruct Manhole Corbel Cone has been added.

05. Sheet 16 - Drainage and Utility Plan No. 10 Foster BMP\_SC\_028  
Modify this sheet as shown in Sketch No. 5 attached to this Addendum No. 3. A callout for 4" Plantable Soil and Seed has been added. A callout to Clean Vortechs Model 3000 has been added.
06. Sheet 26 - Drainage and Utility Plan No. 20 Lincoln BMP\_SC\_035  
Modify this sheet as shown in Sketch No. 6 attached to this Addendum No. 3. A callout to Attach Frame and Cover to Drainage Structure has been added.
07. Sheet 33 - Drainage and Utility Plan No. 27 Newport BMP\_OS\_090-091  
Modify this sheet as shown in Sketch No. 7 attached to this Addendum No. 3. The matchline plan reference has been revised.
08. Sheet 34 - Drainage and Utility Plan No. 28 Newport BMP\_OS\_092-093  
Modify this sheet as shown in Sketch No. 8 attached to this Addendum No. 3. The matchline plan reference has been revised.
09. Sheet 35 - Drainage and Utility Plan No. 29 North Providence BMP\_SC\_009  
Modify this sheet as shown in Sketch No. 9 attached to this Addendum No. 3. A callout to Attach Frame and Cover to Drainage Structure has been added.
10. Sheet 38 - Drainage and Utility Plan No. 32 Providence BMP\_WB\_087  
Modify this sheet as shown in Sketch No. 10 attached to this Addendum No. 3. Callouts for Remove and Dispose Fence, RI STD. 31.2.0, Remove and Dispose Manhole, RI STD. 3.2.0, and Tie Existing Pipe into New Structure have been removed. A callout to Repair Rill Erosion using Rip-Rap Pad has been added.
11. Sheet 38 - Drainage and Utility Plan No. 32 Providence BMP\_WB\_087  
Modify this sheet as shown in Sketch No. 11 attached to this Addendum No. 3. The limits for damaged fence have been revised. The limits for callouts Remove and Dispose Fence and RI STD. 31.2.0 have been revised.
12. Sheet 51 - Drainage and Utility Plan No. 45 Warwick BMP\_WB\_015  
Modify this sheet as shown in Sketch No. 12 attached to this Addendum No. 3. A callout for Rip-Rap Pad has been added to the plan.
13. Sheet 51 - Drainage and Utility Plan No. 45 Warwick BMP\_WB\_015  
Modify this sheet as shown in Sketch No. 13 attached to this Addendum No. 3. A callout to Remove Vegetation has been added. The text describing the roadway has been revised.
14. Sheet 54 - Drainage and Utility Plan No. 48 Warwick BMP\_SC\_083  
Modify this sheet as shown in Sketch No. 14 attached to this Addendum No. 3. A callout to Repair Rill Erosion using Rip-Rap Pad has been added.

**C. Distribution of Quantities**

1. Index Pages 1 and 2  
Remove Index Pages 1 and 2 in their entirety and replace with revised Index Pages 1 (R-1) and 2 (R-1) attached to this Addendum No. 3.

2. Pages 1-2

Remove pages 1 and 2 in their entirety and replace with revised pages 1 (R-1), 2 (R-1), and add new page 2a attached to this Addendum No. 3. Item Code 201.0412 "Remove and Dispose Manhole" has been removed. The quantities for Items Codes 201.9904 "Remove Vegetation" and 202.0700 "Common Borrow" have been revised.

3. Pages 4-5

Delete pages 4 and 5 in their entirety and replace with revised pages 4 (R-1), 5 (R-1), and add new pages 4a and 5a attached to this Addendum No. 3. Item Code 702.0204 "4' Manhole Block Standard 3.2.0" has been removed. The quantity for Item Code 702.9902 "Attach Frame and Grate or Frame and Cover to Drainage Structure" has been revised.

4. Pages 10-12

Remove pages 10-12 in their entirety and replace with revised pages 10-12 (R-1) and add new page 10a attached to this Addendum No. 3. The quantities for Item Codes 708.9903 "Clean Stormwater Treatment System - Vortechs Model 3000" and 708.9905 "Clean Stormwater Treatment System - Vortechs Model 5000" have been revised.

5. Page 15


Remove page 15 in its entirety and replace with revised page 15 (R-1) and add new page 15a attached to this Addendum No. 3. The quantity for Item Code 708.9922 "Clean Stormwater Treatment System - Downstream Defender (6 FT Diameter)" has been revised.

6. Page 16

Remove page 16 in its entirety and replace with revised page 16 (R-1) and add new page 16a attached to this Addendum No. 3. The quantities for Item Codes 920.0055 "Placed Stone Riprap R-3, R-4, R-5 Standard 8.3.0," 920.0140 "Bedding for Riprap FS-3 Standard 8.3.0," and 920.0200 "Filter Fabric for Rip-Rap," have been revised.


7. Pages 17-19

Remove pages 17-19 in their entirety and replace with revised pages 17-19 (R-1) and add new page 17a attached to this Addendum No. 3. The quantities for Item Codes 920.9901 "Geomembrane for Rip-Rap" and L02.0101 "General Highway Seeding (Type 1)" have been revised. New Item Codes 204.0100 "Trimming and Fine Grading," 704.0200 "Reconstruct Manhole/Corbel Cones," and L01.0104 "Plantable Soil 4 Inches Deep" have been added.

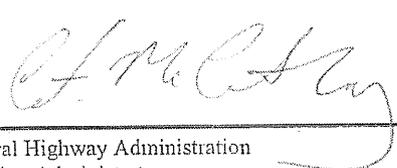---

Federal Highway Administration  
Division Administrator

---

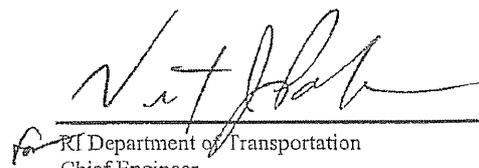RI Department of Transportation  
Chief Engineer

GENERAL DECISION: RI20100001 04/16/2010 RI1

Date: April 16, 2010

General Decision Number: RI20100001 04/16/2010

Superseded General Decision Number: RI20080001

State: Rhode Island

Construction Types: Building, Heavy (Heavy and Marine) and Highway

Counties: Rhode Island Statewide.

BUILDING CONSTRUCTION PROJECTS (does not include residential construction consisting of single family homes and apartments up to and including 4 stories) HEAVY, HIGHWAY AND MARINE CONSTRUCTION PROJECTS

Modification Number	Publication Date
0	03/12/2010
1	03/19/2010
2	03/26/2010
3	04/16/2010

ASBE0006-008 09/01/2009

	Rates	Fringes
Asbestos Worker/Insulator Includes application of all insulating materials, protective coverings, coatings & finishings to all types of mechanical systems.....	\$ 35.25	19.88

ASBE0201-004 06/01/2005

	Rates	Fringes
HAZARDOUS MATERIAL HANDLER Includes preparation, wetting, stripping, removal scrapping, vacuuming, bagging & disposing of all insulation materials, whether they contain asbestos or not, from mechanical systems.....	\$ 17.65	9.95

BOIL0029-001 10/01/2009

	Rates	Fringes
BOILERMAKER.....	\$ 38.25	17.04

BRR10001-001 12/01/2009

	Rates	Fringes
Bricklayer, Stonemason, Pointer, Caulker & Cleaner.....	\$ 33.80	18.45

---

\* BRRI0001-002 03/01/2010

	Rates	Fringes
Marble Setter, Terrazzo Worker & Tile Setter.....	\$ 33.80	19.50

---

\* BRRI0001-003 03/01/2010

	Rates	Fringes
Marble, Tile & Terrazzo Finisher.....	\$ 28.80	18.40

---

CARP0094-001 06/08/2009

	Rates	Fringes
Carpenter; piledriver; soft floor layer.....	\$ 30.75	19.94
Diver Tender.....	\$ 31.75	19.94
Diver.....	\$ 42.55	19.94
MILLWRIGHT.....	\$ 31.75	19.94
WELDER.....	\$ 31.75	19.94

FOOTNOTES:

When not diving or tending the diver, the diver and diver tender shall receive the piledriver rate. Diver tenders shall receive \$1.00 per hour above the pile driver rate when tending the diver.

Work on free-standing stacks, concrete silos & public utility electrical power houses, which are over 35 ft. in height when constructed: \$.50 per hour additional.

Work on exterior concrete shear wall gang forms, 45 ft. or more above ground elevation or on setback: \$.50 per hour additional.

The designated piledriver, known as the "monkey": \$1.00 per hour additional.

---

ELEC0099-002 06/01/2009

	Rates	Fringes
ELECTRICIAN.....	\$ 34.08	53.34%
Teledata System Installer.....	\$ 25.56	12.1%+10.36

FOOTNOTES:

Work of a hazardous nature, or where the work height is 30 ft. or more from the floor, except when working

OSHA-approved lifts: 20% per hour additional.

Work in tunnels below ground level in combined sewer outfall:  
20% per hour additional.

-----  
ELEV0039-001 01/01/2010

	Rates	Fringes
ELEVATOR MECHANIC.....	\$ 42.13	20.035+A+B

FOOTNOTES:

A. PAID HOLIDAYS: New Years Day; Memorial Day; Independence Day; Labor Day; Veterans' Day; Thanksgiving Day; the Friday after Thanksgiving Day; and Christmas Day.

B. Employer contributes 8% basic hourly rate for 5 years or more of service of 6% basic hourly rate for 6 months to 5 years of service as vacation pay credit.

-----  
ENGI0057-001 12/01/2009

	Rates	Fringes
Operating Engineer: (power plants, sewer treatment plants, pumping stations, tunnels, caissons, piers, docks, bridges, subterranean & other marine and heavy construction work)		
GROUP 1.....	\$ 32.90	19.10+a
GROUP 2.....	\$ 28.52	19.10+a
GROUP 3.....	\$ 25.67	19.10+a
GROUP 4.....	\$ 31.95	19.10+a
GROUP 5.....	\$ 31.62	19.10+a
GROUP 6.....	\$ 28.60	19.10+a
GROUP 7.....	\$ 32.52	19.10+a

PAID HOLIDAYS:

New Year's Day, President's Day, Memorial Day, July Fourth, Victory Day, Labor Day, Columbus Day, Veterans Day, Thanksgiving Day, Christmas Day. a: Any employee who works 3 days in the week in which a holiday falls shall be paid for the holiday.

FOOTNOTES:

Hazmat work: \$2.00 per hour additional.

Tunnel work: \$2.00 per hour additional.

POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1: Digging machine, Ross Carrier, crane, lighter, locomotive, derrick, hoist, elevator, bidwell-type machine, shot & water blasting machine, paver, spreader, front end loader (3 yds. and over), vibratory hammer & vacuum truck.

GROUP 2: Fireman & oiler.

GROUP 3: Oiler on crawler backhoe.

GROUP 4: Bulldozer, bobcat, tractor, grader, scraper, pippin-type backhoe, roller, front end loader (less than 3 yds.), street and mobile-powered sweeper (3-yd. capacity), 8-ft. sweeper minimum 65 HP).

GROUP 5: Well-point installation crew.

GROUP 6: Heater, concrete mixer, stone crusher, welding machine, generator and light plant, gas and electric driven pump and air compressor.

GROUP 7: Boat & tug operator.

-----  
 ENGI0057-002 11/01/2009

	Rates	Fringes
Power Equipment Operator (highway construction projects; water and sewerline projects which are incidental to highway construction projects; and bridge projects which are incidental to highway construction projects)		
GROUP 1.....	\$ 28.05	19.10+a
GROUP 2.....	\$ 26.58	19.10+a
GROUP 3.....	\$ 20.63	19.10+a
GROUP 4.....	\$ 23.33	19.10+a
GROUP 5.....	\$ 27.03	19.10+a
GROUP 6.....	\$ 26.65	19.10+a
GROUP 7.....	\$ 22.30	19.10+a
GROUP 8.....	\$ 23.68	19.10+a
GROUP 9.....	\$ 25.63	19.10+a
GROUP 10.....	\$ 26.10	19.10+a
GROUP 11.....	\$ 26.48	19.10+a

FOOTNOTE: a. Any employee who works three days in the week in which a holiday falls shall be paid for the holiday.

PAID HOLIDAYS: New Year's Day, President's Day, Memorial Day, July Fourth, Victory Day, Labor Day, Columbus Day, Veterans Day, Thanksgiving Day & Christmas Day.

POWER EQUIPMENT OPERATOR CLASSIFICATIONS

GROUP 1: Digging machine, crane, piledriver, lighter, locomotive, derrick, hoist, boom truck, John Henry's, directional drilling machine, cold planer, reclaimer, paver, spreader, grader, front end loader (3 yds. and over), vacuum truck, test boring machine operator, veemere saw, water blaster, hydro-demolition robot, forklift, econobile, Ross Carrier, concrete pump operator

GROUP 2: Fireman

GROUP 3: Oiler

GROUP 4: Oiler on truck crane, gradall & crawler crane

GROUP 5: Pippin type backhoe, front end loader (less than 3 yds.), bulldozer & scraper

GROUP 6: Roller, bobcat, street sweeper

GROUP 7: Gas and electric drive heater, concrete mixer, light plant, welding machine, pump & compressor

GROUP 8: Stone crusher

GROUP 9: Mechanic & welder

GROUP 10: Shovel operator, front end loader & dragline

GROUP 11: Well point installation crew

-----  
 ENGI0057-003 12/01/2009

BUILDING CONSTRUCTION

	Rates	Fringes
Power Equipment Operator		
GROUP 1.....	\$ 32.17	19.10+a
GROUP 2.....	\$ 31.95	19.10+a
GROUP 3.....	\$ 27.95	19.10+a
GROUP 4.....	\$ 25.10	19.10+a
GROUP 5.....	\$ 31.25	19.10+a
GROUP 6.....	\$ 30.82	19.10+a
GROUP 7.....	\$ 28.14	19.10+a

BOOM LENTHS, INCLUDING JIBS:

- 150 ft. and over: + \$1.25
- 180 ft. and over: + \$2.25
- 210 ft. and over: + \$3.25
- 240 ft. and over: + \$4.25
- 270 ft. and over: + \$6.25
- 300 ft. and over: + \$7.25

PAID HOLIDAYS: New Year's Day, President's Day, Memorial Day, July Fourth, Victory Day, Labor Day, Columbus Day, Veterans Day, Thanksgiving Day & Christmas Day. a: Any employee who works 3 days in the week in which a holiday falls shall be paid for the holiday.

FOOTNOTE: Hazmat work: \$2.00 per hour additional. Tunnel work: \$2.00 per hour additional.

POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1: Digging machine, Ross carrier, crane, lighter, locomotive, derrick, hoist, elevator, bidwell-type machine, shot & water blasting machine, paver, spreader, front end loader (3 yds. and over), vibratory hammer and vacuum truck

GROUP 2: Economobile-type equipment, forklift, concrete pump & on-site concrete plant

GROUP 3: Fireman & oiler

GROUP 4: Oiler on crawler backhoe

GROUP 5: Bulldozer, bobcat, tractor, grader, scraper, pippin-type backhoe, roller, front end loader (less than 3 yds.), street and mobile powered sweeper (3 yds. capacity), 8-ft. sweeper (minimum 65 hp)

GROUP 6: Well point installation crew

GROUP 7: Heater, concrete mixer, stone crusher, welding machine, generator for light plant, gas and electric driven pump & air compressor

-----  
IRON0037-001 06/01/2009

	Rates	Fringes
IRONWORKER.....	\$ 30.45	19.47

-----  
LABO0271-001 12/01/2008

BUILDING CONSTRUCTION

	Rates	Fringes
LABORER		
GROUP 1.....	\$ 25.10	16.00
GROUP 2.....	\$ 25.35	16.00
GROUP 3.....	\$ 25.85	16.00
GROUP 4.....	\$ 26.10	16.00
GROUP 5.....	\$ 27.10	16.00

LABORERS CLASSIFICATIONS

GROUP 1: Laborer, Carpenter Tender, Mason Tender, Cement Finisher Tender, Scaffold Erector, Wrecking Laborer, Asbestos Removal [Non-Mechanical Systems]

GROUP 2: Asphalt Raker, Adzemen, Pipe Trench Bracer, Demolition Burner, Chain Saw Operator, Fence & Guard Rail Erector, Setter of Metal Forms for Roadways, Mortar Mixer, Pipelayer, Riprap & Dry Stonewall Builder, Highway Stone Spreader, Pneumatic Tool Operator, Wagon Drill Operator, Tree Trimmer, Barco-Type Jumping Tamper, Mechanical Grinder Operator

GROUP 3: Pre-Cast Floor & Roof Plank Erectors

GROUP 4: Air Track Operator, Hydraulic & Similar Self-Powered Drill, Block Paver, Rammer, Curb Setter, Powderman & Blaster

GROUP 5: Toxic Waste Remover

-----  
LABO0271-002 06/01/2009

HEAVY AND HIGHWAY CONSTRUCTION

	Rates	Fringes
LABORER		
COMPRESSED AIR		
Group 1.....	\$ 42.53	16.75
Group 2.....	\$ 32.05	16.75
Group 3.....	\$ 44.53	16.75
FREE AIR		
Group 1.....	\$ 34.60	16.75
Group 2.....	\$ 32.05	16.75
Group 3.....	\$ 36.60	16.75
LABORER		
Group 1.....	\$ 25.10	16.75
Group 2.....	\$ 25.35	16.75
Group 3.....	\$ 26.10	16.75
Group 4.....	\$ 18.60	16.75
Group 5.....	\$ 27.10	16.75
OPEN AIR CAISSON, UNDERPINNING WORK AND BORING CREW		
Bottom Man.....	\$ 31.10	16.75
Top Man & Laborer.....	\$ 30.15	16.75
TEST BORING		
Driller.....	\$ 31.55	16.75
Laborer.....	\$ 30.15	16.75

## LABORER CLASSIFICATIONS

GROUP 1: Laborer; Carpenter tender; Cement finisher tender; Wrecking laborer; Asbestos removers [non-mechanical systems]; Plant laborer; Driller in quarries

GROUP 2: Adzeperson; Asphalt raker; Barcotype jumping tamper; Chain saw operators; Concrete and power buggy operator; Concrete saw operator; Demolition burner; Fence and guard rail erector; Highway stone spreader; Laser beam operator; Mechanical grinder operator; Mason tender; Mortar mixer; Pneumatic tool operator; Riprap and dry stonewall builder; Scaffold erector; Setter of metal forms for roadways; Wagon drill operator; Wood chipper operator; Pipelayer; Pipe trench bracer

GROUP 3: Air track drill operator; Hydraulic and similar powered drills; Brick paver; Block paver; Rammer and curb setter; Powderperson and blaster

GROUP 4: Flagger & signaler

GROUP 5: Toxic waste remover

## LABORER - COMPRESSED AIR CLASSIFICATIONS

GROUP 1: Mucking machine operator, tunnel laborer, brake person, track person, miner, grout person, lock tender, gauge tender, miner: motor person & all others in compressed air

GROUP 2: Change house attendant, powder watchperson, top person on iron

GROUP 3: Hazardous waste work within the "HOT" zone

LABORER - FREE AIR CLASSIFICATIONS

GROUP 1: Grout person - pumps, brake person, track person, form mover & stripper (wood & steel), shaft laborer, laborer topside, outside motorperson, miner, conveyor operator, miner welder, heading motorperson, erecting operator, mucking machine operator, nozzle person, rodperson, safety miner, shaft & tunnel, steel & rodperson, mole nipper, concrete worker, form erector (wood, steel and all accessories), cement finisher (this type of work only), top signal person, bottom person (when heading is 50' from shaft), burner, shield operator and TBM operator

GROUP 2: Change house attendant, powder watchperson

GROUP 3: Hazardous waste work within the "HOT" zone

-----  
 PAIN0011-005 06/01/2009

	Rates	Fringes
PAINTER		
Brush, Roller, Taper, Wall		
Cover.....	\$ 27.65	15.27
Epoxy, Tanks, Towers, Swing Stage & Structural		
Steel.....	\$ 29.65	15.27
Spray, Sand & Water		
Blasting.....	\$ 28.65	15.27

-----  
 PAIN0011-006 06/01/2009

	Rates	Fringes
GLAZIER.....	\$ 31.73	14.55

FOOTNOTES:

SWING STAGE: \$1.00 per hour additional.

PAID HOLIDAYS: Labor Day & Christmas Day.

-----  
 PAIN0011-011 06/01/2009

	Rates	Fringes
Painter (Bridge Work).....	\$ 38.63	15.07

-----  
 PAIN0035-008 06/01/2009

	Rates	Fringes
Sign Painter.....	\$ 24.81	13.22

-----  
 PLAS0040-001 06/07/2009

BUILDING CONSTRUCTION

	Rates	Fringes
CEMENT MASON/CONCRETE FINISHER...	\$ 29.75	19.70
PLASTERER.....	\$ 30.50	18.95

FOOTNOTE: Cement Mason: Work on free swinging scaffolds under 3 planks width and which is 20 or more feet above ground and any offset structure: \$.30 per hour additional.

-----  
 PLAS0040-002 07/20/2009

HEAVY AND HIGHWAY CONSTRUCTION

	Rates	Fringes
CEMENT MASON/CONCRETE FINISHER...	\$ 27.00	15.15

-----  
 PLUM0051-002 03/01/2010

	Rates	Fringes
Plumbers and Pipefitters.....	\$ 34.36	24.47

-----  
 ROOF0033-004 01/01/2010

	Rates	Fringes
ROOFER, Including Built Up, Composition and Single Ply Roofs.....	\$ 29.45	17.70

-----  
 SFRI0676-001 01/01/2010

	Rates	Fringes
SPRINKLER FITTER.....	\$ 39.50	17.85

-----  
 SHEE0017-002 07/01/2006

	Rates	Fringes
Sheet Metal Worker.....	\$ 29.60	22.61

-----  
 TEAM0251-001 05/01/2009

HEAVY AND HIGHWAY CONSTRUCTION

	Rates	Fringes
TRUCK DRIVER		
GROUP 1.....	\$ 25.71	14.0525+A+B
GROUP 2.....	\$ 25.86	14.0525+A+B
GROUP 3.....	\$ 25.91	14.0525+A+B
GROUP 4.....	\$ 25.96	14.0525+A+B
GROUP 5.....	\$ 26.06	14.0525+A+B
GROUP 6.....	\$ 26.21	14.0525+A+B
GROUP 7.....	\$ 26.46	14.0525+A+B
GROUP 8.....	\$ 26.16	14.0525+A+B
GROUP 9.....	\$ 26.41	14.0525+A+B

GROUP 10.....\$ 26.66      14.0525+A+B

FOOTNOTES:

A. Paid Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day and Christmas Day, plus Washington's Birthday, Columbus Day, Veteran's Day & V-J Day, providing the employee has worked at least one day in the calendar week in which the holiday falls.

B. Employee who has been on the payroll for 1 year or more but less than 5 years and has worked 150 Days during the last year of employment shall receive 1 week's paid vacation; 5 to 10 years - 2 weeks' paid vacation; 10 or more years - 3 week's paid vacation.

Tunnel rate for trucks actually going underground - add .40 per hour to rate according to equipment.

On equipment used to haul powder add .25 per hour above rate according to axle.

All drivers working on a defined hazard material job site shall be paid a premium of \$2.00 per hour over applicable rate.

TRUCK DRIVER CLASSIFICATIONS

GROUP 1: Pick-up trucks, station wagons, & panel trucks

GROUP 2: Stake body on low beds

GROUP 3: Two-axle dump truck

GROUP 4: Three-axle dump truck

GROUP 5: Four- and five-axle equipment

GROUP 6: Low-bed or boom trailer

GROUP 8: Special earth-moving equipment, under 35 tons

GROUP 9: Special earth-moving equipment, 35 tons or over

GROUP 10: Tractor trailer

-----  
WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.  
=====

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29 CFR 5.5 (a)(1)(ii)).  
-----

In the listing above, the "SU" designation means that rates listed under the identifier do not reflect collectively

bargained wage and fringe benefit rates. Other designations indicate unions whose rates have been determined to be prevailing.

-----  
WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter? This can be:

- \* an existing published wage determination
- \* a survey underlying a wage determination
- \* a Wage and Hour Division letter setting forth a position on a wage determination matter
- \* a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determinations  
Wage and Hour Division  
U.S. Department of Labor  
200 Constitution Avenue, N.W.  
Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator  
U.S. Department of Labor  
200 Constitution Avenue, N.W.  
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.



3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board  
U.S. Department of Labor  
200 Constitution Avenue, N.W.  
Washington, DC 20210


4.) All decisions by the Administrative Review Board are final.

=====

END OF GENERAL DECISION

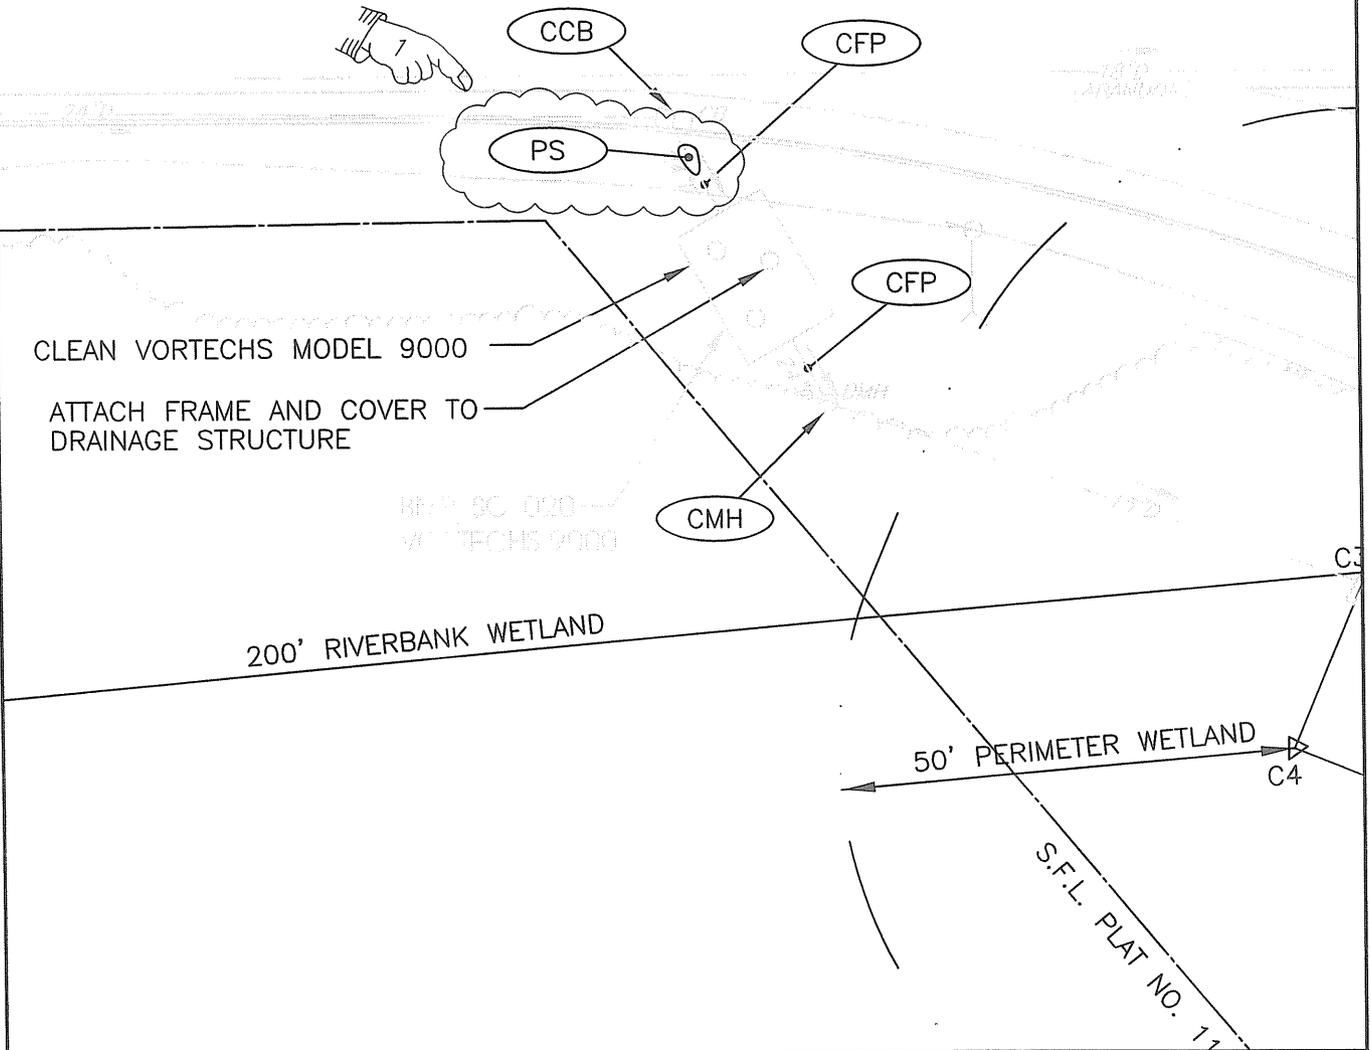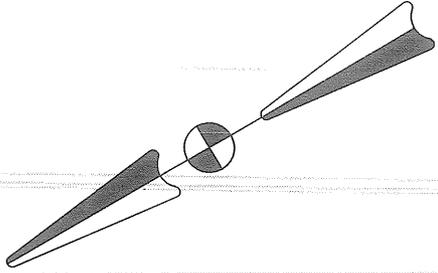



<p><b>CROSSMAN ENGINEERING, INC.</b>          Civil - Transportation - Environmental - Site Planning - Land Surveying   151 Centerville Road          Warwick, Rhode Island 02886</p>	<p>TITLE OF SKETCH  <b>DRAINAGE AND UTILITY          PLAN NO. 04          CRANSTON BMP_SC_020</b></p>	<p>R.I. Contract No.  <b>2010-CH-020</b></p>	<p>Sketch No.  <b>1</b></p>
<p>04/23/10</p>	<p>ADDENDUM NUMBER 3</p>	<p>Revision to Sheet No. 10</p>	

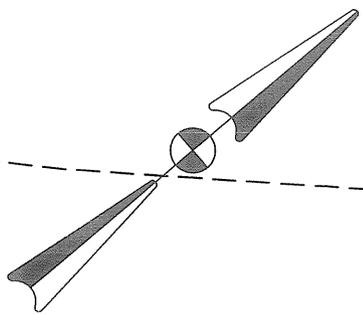

ATTACH FRAME AND COVER  
TO DRAINAGE STRUCTURE

ODMH

INSTALLATION OF DRAINAGE PIPE SYSTEM (WATER TIGHT)  
0.15 TO 0.20 IN. (10 GAUGE) ALUMINIZED STEEL CONNECT  
PIPE SECTIONS WITH "TRIGGER BANDS" OR APPROVED EQUIV.  
TO PLUGGER'S RING WITH GASKET JOINT

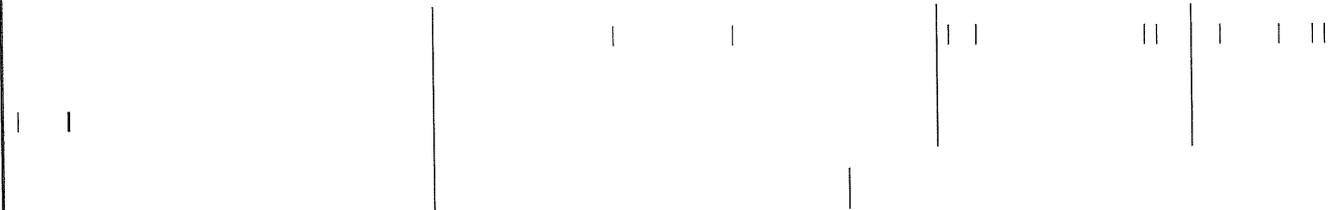

April 23, 2010

STATE OF RHODE ISLAND AND PROVIDENCE PLANTATION  
DEPARTMENT OF TRANSPORTATION  
RHODE ISLAND CONTRACT NO.2010-CH-020  
FEDERAL-AID PROJECT NO. FAP Nos: STP-SDRP(008)

**Statewide Stormdrain Retrofit Project - BMP Monitoring**

Statewide

CITY/TOWN OF Statewide

COUNTY OF STATEWIDE

NOTICE TO PROSPECTIVE BIDDERS

ADDENDUM NO. 3 Prospective bidders and all concerned are hereby notified of the following changes in the Plans, Specifications, Proposal and Distribution of Quantities for this contract. These changes shall be incorporated in the Plans, Specifications, Proposal and Distribution of Quantities, and shall become an integral part of the Contract Documents.

**A. Contract Documents**

1. Federal Wages Rates

Delete Federal Wage Rate pages 1-12 in their entirety and replace with revised pages 1-12 (R-1) attached to this Addendum No. 3.

**B. Drawings/Plans - Change/Addition**

01. Sheet 10 - Drainage and Utility Plan No. 4 Cranston BMP\_SC\_020

Modify this sheet as shown in Sketch No. 1 attached to this Addendum No. 3. A callout for 4" Plantable Soil and Seed has been added.

02. Sheet 13 - Drainage and Utility Plan No. 7 Cranston BMP\_SC\_120

Modify this sheet as shown in Sketch No. 2 attached to this Addendum No. 3. A callout to Attach Frame and Cover to Drainage Structure has been added.

03. Sheet 14 - Drainage and Utility Plan No. 08 Exeter BMP\_SC\_055

Modify this sheet as shown in Sketch No. 3 attached to this Addendum No. 3. The existing structure has been revised. The callout to clean the existing structure has been revised.

04. Sheet 15 - Drainage and Utility Plan No. 09 Foster BMP\_SC\_027

Modify this sheet as shown in Sketch No. 4 attached to this Addendum No. 3. A callout to Reconstruct Manhole Corbel Cone has been added.

05. Sheet 16 - Drainage and Utility Plan No. 10 Foster BMP\_SC\_028  
Modify this sheet as shown in Sketch No. 5 attached to this Addendum No. 3. A callout for 4" Plantable Soil and Seed has been added. A callout to Clean Vortechs Model 3000 has been added.
06. Sheet 26 - Drainage and Utility Plan No. 20 Lincoln BMP\_SC\_035  
Modify this sheet as shown in Sketch No. 6 attached to this Addendum No. 3. A callout to Attach Frame and Cover to Drainage Structure has been added.
07. Sheet 33 - Drainage and Utility Plan No. 27 Newport BMP\_OS\_090-091  
Modify this sheet as shown in Sketch No. 7 attached to this Addendum No. 3. The matchline plan reference has been revised.
08. Sheet 34 - Drainage and Utility Plan No. 28 Newport BMP\_OS\_092-093  
Modify this sheet as shown in Sketch No. 8 attached to this Addendum No. 3. The matchline plan reference has been revised.
09. Sheet 35 - Drainage and Utility Plan No. 29 North Providence BMP\_SC\_009  
Modify this sheet as shown in Sketch No. 9 attached to this Addendum No. 3. A callout to Attach Frame and Cover to Drainage Structure has been added.
10. Sheet 38 - Drainage and Utility Plan No. 32 Providence BMP\_WB\_087  
Modify this sheet as shown in Sketch No. 10 attached to this Addendum No. 3. Callouts for Remove and Dispose Fence, RI STD. 31.2.0, Remove and Dispose Manhole, RI STD. 3.2.0, and Tie Existing Pipe into New Structure have been removed. A callout to Repair Rill Erosion using Rip-Rap Pad has been added.
11. Sheet 38 - Drainage and Utility Plan No. 32 Providence BMP\_WB\_087  
Modify this sheet as shown in Sketch No. 11 attached to this Addendum No. 3. The limits for damaged fence have been revised. The limits for callouts Remove and Dispose Fence and RI STD. 31.2.0 have been revised.
12. Sheet 51 - Drainage and Utility Plan No. 45 Warwick BMP\_WB\_015  
Modify this sheet as shown in Sketch No. 12 attached to this Addendum No. 3. A callout for Rip-Rap Pad has been added to the plan.
13. Sheet 51 - Drainage and Utility Plan No. 45 Warwick BMP\_WB\_015  
Modify this sheet as shown in Sketch No. 13 attached to this Addendum No. 3. A callout to Remove Vegetation has been added. The text describing the roadway has been revised.
14. Sheet 54 - Drainage and Utility Plan No. 48 Warwick BMP\_SC\_083  
Modify this sheet as shown in Sketch No. 14 attached to this Addendum No. 3. A callout to Repair Rill Erosion using Rip-Rap Pad has been added.

**C. Distribution of Quantities**

1. Index Pages 1 and 2  
Remove Index Pages 1 and 2 in their entirety and replace with revised Index Pages 1 (R-1) and 2 (R-1) attached to this Addendum No. 3.

2. Pages 1-2

Remove pages 1 and 2 in their entirety and replace with revised pages 1 (R-1), 2 (R-1), and add new page 2a attached to this Addendum No. 3. Item Code 201.0412 "Remove and Dispose Manhole" has been removed. The quantities for Items Codes 201.9904 "Remove Vegetation" and 202.0700 "Common Borrow" have been revised.

3. Pages 4-5

Delete pages 4 and 5 in their entirety and replace with revised pages 4 (R-1), 5 (R-1), and add new pages 4a and 5a attached to this Addendum No. 3. Item Code 702.0204 "4' Manhole Block Standard 3.2.0" has been removed. The quantity for Item Code 702.9902 "Attach Frame and Grate or Frame and Cover to Drainage Structure" has been revised.

4. Pages 10-12

Remove pages 10-12 in their entirety and replace with revised pages 10-12 (R-1) and add new page 10a attached to this Addendum No. 3. The quantities for Item Codes 708.9903 "Clean Stormwater Treatment System - Vortechs Model 3000" and 708.9905 "Clean Stormwater Treatment System - Vortechs Model 5000" have been revised.

5. Page 15

Remove page 15 in its entirety and replace with revised page 15 (R-1) and add new page 15a attached to this Addendum No. 3. The quantity for Item Code 708.9922 "Clean Stormwater Treatment System - Downstream Defender (6 FT Diameter)" has been revised.

6. Page 16

Remove page 16 in its entirety and replace with revised page 16 (R-1) and add new page 16a attached to this Addendum No. 3. The quantities for Item Codes 920.0055 "Placed Stone Riprap R-3, R-4, R-5 Standard 8.3.0," 920.0140 "Bedding for Riprap FS-3 Standard 8.3.0," and 920.0200 "Filter Fabric for Rip-Rap," have been revised.

7. Pages 17-19

Remove pages 17-19 in their entirety and replace with revised pages 17-19 (R-1) and add new page 17a attached to this Addendum No. 3. The quantities for Item Codes 920.9901 "Geomembrane for Rip-Rap" and L02.0101 "General Highway Seeding (Type 1)" have been revised. New Item Codes 204.0100 "Trimming and Fine Grading," 704.0200 "Reconstruct Manhole/Corbel Cones," and L01.0104 "Plantable Soil 4 Inches Deep" have been added.

---

Federal Highway Administration  
Division Administrator

---

RI Department of Transportation  
Chief Engineer

GENERAL DECISION: RI20100001 04/16/2010 RI1

Date: April 16, 2010  
 General Decision Number: RI20100001 04/16/2010

Superseded General Decision Number: RI20080001

State: Rhode Island

Construction Types: Building, Heavy (Heavy and Marine) and Highway

Counties: Rhode Island Statewide.

BUILDING CONSTRUCTION PROJECTS (does not include residential construction consisting of single family homes and apartments up to and including 4 stories) HEAVY, HIGHWAY AND MARINE CONSTRUCTION PROJECTS

Modification Number	Publication Date
0	03/12/2010
1	03/19/2010
2	03/26/2010
3	04/16/2010

ASBE0006-008 09/01/2009

	Rates	Fringes
Asbestos Worker/Insulator Includes application of all insulating materials, protective coverings, coatings & finishings to all types of mechanical systems.....	\$ 35.25	19.88

ASBE0201-004 06/01/2005

	Rates	Fringes
HAZARDOUS MATERIAL HANDLER Includes preparation, wetting, stripping, removal scrapping, vacuuming, bagging & disposing of all insulation materials, whether they contain asbestos or not, from mechanical systems.....	\$ 17.65	9.95

BOIL0029-001 10/01/2009

	Rates	Fringes
BOILERMAKER.....	\$ 38.25	17.04

BRR10001-001 12/01/2009

	Rates	Fringes
Bricklayer, Stonemason, Pointer, Caulker & Cleaner.....	\$ 33.80	18.45

-----  
\* BRRIO001-002 03/01/2010

	Rates	Fringes
Marble Setter, Terrazzo Worker & Tile Setter.....	\$ 33.80	19.50

-----  
\* BRRIO001-003 03/01/2010

	Rates	Fringes
Marble, Tile & Terrazzo Finisher.....	\$ 28.80	18.40

-----  
CARP0094-001 06/08/2009

	Rates	Fringes
Carpenter; piledriver; soft floor layer.....	\$ 30.75	19.94
Diver Tender.....	\$ 31.75	19.94
Diver.....	\$ 42.55	19.94
MILLWRIGHT.....	\$ 31.75	19.94
WELDER.....	\$ 31.75	19.94

FOOTNOTES:

When not diving or tending the diver, the diver and diver tender shall receive the piledriver rate. Diver tenders shall receive \$1.00 per hour above the pile driver rate when tending the diver.

Work on free-standing stacks, concrete silos & public utility electrical power houses, which are over 35 ft. in height when constructed: \$.50 per hour additional.

Work on exterior concrete shear wall gang forms, 45 ft. or more above ground elevation or on setback: \$.50 per hour additional.

The designated piledriver, known as the "monkey": \$1.00 per hour additional.

-----  
ELEC0099-002 06/01/2009

	Rates	Fringes
ELECTRICIAN.....	\$ 34.08	53.34%
Teledata System Installer.....	\$ 25.56	12.1%+10.36

FOOTNOTES:

Work of a hazardous nature, or where the work height is 30 ft. or more from the floor, except when working

OSHA-approved lifts: 20% per hour additional.

Work in tunnels below ground level in combined sewer outfall:  
20% per hour additional.

-----  
ELEV0039-001 01/01/2010

	Rates	Fringes
ELEVATOR MECHANIC.....	\$ 42.13	20.035+A+B

FOOTNOTES:

A. PAID HOLIDAYS: New Years Day; Memorial Day; Independence Day; Labor Day; Veterans' Day; Thanksgiving Day; the Friday after Thanksgiving Day; and Christmas Day.

B. Employer contributes 8% basic hourly rate for 5 years or more of service or 6% basic hourly rate for 6 months to 5 years of service as vacation pay credit.

-----  
ENGI0057-001 12/01/2009

	Rates	Fringes
Operating Engineer: (power plants, sewer treatment plants, pumping stations, tunnels, caissons, piers, docks, bridges, subterranean & other marine and heavy construction work)		
GROUP 1.....	\$ 32.90	19.10+a
GROUP 2.....	\$ 28.52	19.10+a
GROUP 3.....	\$ 25.67	19.10+a
GROUP 4.....	\$ 31.95	19.10+a
GROUP 5.....	\$ 31.62	19.10+a
GROUP 6.....	\$ 28.60	19.10+a
GROUP 7.....	\$ 32.52	19.10+a

PAID HOLIDAYS:

New Year's Day, President's Day, Memorial Day, July Fourth, Victory Day, Labor Day, Columbus Day, Veterans Day, Thanksgiving Day, Christmas Day. a: Any employee who works 3 days in the week in which a holiday falls shall be paid for the holiday.

FOOTNOTES:

Hazmat work: \$2.00 per hour additional.  
Tunnel work: \$2.00 per hour additional.

POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1: Digging machine, Ross Carrier, crane, lighter, locomotive, derrick, hoist, elevator, bidwell-type machine, shot & water blasting machine, paver, spreader, front end loader (3 yds. and over), vibratory hammer & vacuum truck.

GROUP 2: Fireman & oiler.

GROUP 3: Oiler on crawler backhoe.

GROUP 4: Bulldozer, bobcat, tractor, grader, scraper, pippin-type backhoe, roller, front end loader (less than 3 yds.), street and mobile-powered sweeper (3-yd. capacity), 8-ft. sweeper minimum 65 HP).

GROUP 5: Well-point installation crew.

GROUP 6: Heater, concrete mixer, stone crusher, welding machine, generator and light plant, gas and electric driven pump and air compressor.

GROUP 7: Boat & tug operator.

-----  
 ENGI0057-002 11/01/2009

	Rates	Fringes
Power Equipment Operator (highway construction projects; water and sewerline projects which are incidental to highway construction projects; and bridge projects which are incidental to highway construction projects)		
GROUP 1.....	\$ 28.05	19.10+a
GROUP 2.....	\$ 26.58	19.10+a
GROUP 3.....	\$ 20.63	19.10+a
GROUP 4.....	\$ 23.33	19.10+a
GROUP 5.....	\$ 27.03	19.10+a
GROUP 6.....	\$ 26.65	19.10+a
GROUP 7.....	\$ 22.30	19.10+a
GROUP 8.....	\$ 23.68	19.10+a
GROUP 9.....	\$ 25.63	19.10+a
GROUP 10.....	\$ 26.10	19.10+a
GROUP 11.....	\$ 26.48	19.10+a

FOOTNOTE: a. Any employee who works three days in the week in which a holiday falls shall be paid for the holiday.

PAID HOLIDAYS: New Year's Day, President's Day, Memorial Day, July Fourth, Victory Day, Labor Day, Columbus Day, Veterans Day, Thanksgiving Day & Christmas Day.

POWER EQUIPMENT OPERATOR CLASSIFICATIONS

GROUP 1: Digging machine, crane, piledriver, lighter, locomotive, derrick, hoist, boom truck, John Henry's, directional drilling machine, cold planer, reclaimer, paver, spreader, grader, front end loader (3 yds. and over), vacuum truck, test boring machine operator, veemere saw, water blaster, hydro-demolition robot, forklift, economobile, Ross Carrier, concrete pump operator

GROUP 2: Fireman

GROUP 3: Oiler

GROUP 4: Oiler on truck crane, gradall & crawler crane

GROUP 5: Pippin type backhoe, front end loader (less than 3 yds.), bulldozer & scraper

GROUP 6: Roller, bobcat, street sweeper

GROUP 7: Gas and electric drive heater, concrete mixer, light plant, welding machine, pump & compressor

GROUP 8: Stone crusher

GROUP 9: Mechanic & welder

GROUP 10: Shovel operator, front end loader & dragline

GROUP 11: Well point installation crew

-----  
 ENGI0057-003 12/01/2009

BUILDING CONSTRUCTION

	Rates	Fringes
Power Equipment Operator		
GROUP 1.....	\$ 32.17	19.10+a
GROUP 2.....	\$ 31.95	19.10+a
GROUP 3.....	\$ 27.95	19.10+a
GROUP 4.....	\$ 25.10	19.10+a
GROUP 5.....	\$ 31.25	19.10+a
GROUP 6.....	\$ 30.82	19.10+a
GROUP 7.....	\$ 28.14	19.10+a

BOOM LENTHS, INCLUDING JIBS:

- 150 ft. and over: + \$1.25
- 180 ft. and over: + \$2.25
- 210 ft. and over: + \$3.25
- 240 ft. and over: + \$4.25
- 270 ft. and over: + \$6.25
- 300 ft. and over: + \$7.25

PAID HOLIDAYS: New Year's Day, President's Day, Memorial Day, July Fourth, Victory Day, Labor Day, Columbus Day, Veterans Day, Thanksgiving Day & Christmas Day. a: Any employee who works 3 days in the week in which a holiday falls shall be paid for the holiday.

FOOTNOTE: Hazmat work: \$2.00 per hour additional. Tunnel work: \$2.00 per hour additional.

POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1: Digging machine, Ross carrier, crane, lighter, locomotive, derrick, hoist, elevator, bidwell-type machine, shot & water blasting machine, paver, spreader, front end loader (3 yds. and over), vibratory hammer and vacuum truck

GROUP 2: Economobile-type equipment, forklift, concrete pump & on-site concrete plant

GROUP 3: Fireman & oiler

GROUP 4: Oiler on crawler backhoe

GROUP 5: Bulldozer, bobcat, tractor, grader, scraper, pippin-type backhoe, roller, front end loader (less than 3 yds.), street and mobile powered sweeper (3 yds. capacity), 8-ft. sweeper (minimum 65 hp)

GROUP 6: Well point installation crew

GROUP 7: Heater, concrete mixer, stone crusher, welding machine, generator for light plant, gas and electric driven pump & air compressor

-----  
IRON0037-001 06/01/2009

	Rates	Fringes
IRONWORKER.....	\$ 30.45	19.47

-----  
LABO0271-001 12/01/2008

BUILDING CONSTRUCTION

	Rates	Fringes
LABORER		
GROUP 1.....	\$ 25.10	16.00
GROUP 2.....	\$ 25.35	16.00
GROUP 3.....	\$ 25.85	16.00
GROUP 4.....	\$ 26.10	16.00
GROUP 5.....	\$ 27.10	16.00

LABORERS CLASSIFICATIONS

GROUP 1: Laborer, Carpenter Tender, Mason Tender, Cement Finisher Tender, Scaffold Erector, Wrecking Laborer, Asbestos Removal [Non-Mechanical Systems]

GROUP 2: Asphalt Raker, Adzemen, Pipe Trench Bracer, Demolition Burner, Chain Saw Operator, Fence & Guard Rail Erector, Setter of Metal Forms for Roadways, Mortar Mixer, Pipelayer, Riprap & Dry Stonewall Builder, Highway Stone Spreader, Pneumatic Tool Operator, Wagon Drill Operator, Tree Trimmer, Barco-Type Jumping Tamper, Mechanical Grinder Operator

GROUP 3: Pre-Cast Floor & Roof Plank Erectors

GROUP 4: Air Track Operator, Hydraulic & Similar Self-Powered Drill, Block Paver, Rammer, Curb Setter, Powderman & Blaster

GROUP 5: Toxic Waste Remover

-----  
LABO0271-002 06/01/2009

HEAVY AND HIGHWAY CONSTRUCTION

	Rates	Fringes
LABORER		
COMPRESSED AIR		
Group 1.....	\$ 42.53	16.75
Group 2.....	\$ 32.05	16.75
Group 3.....	\$ 44.53	16.75
FREE AIR		
Group 1.....	\$ 34.60	16.75
Group 2.....	\$ 32.05	16.75
Group 3.....	\$ 36.60	16.75
LABORER		
Group 1.....	\$ 25.10	16.75
Group 2.....	\$ 25.35	16.75
Group 3.....	\$ 26.10	16.75
Group 4.....	\$ 18.60	16.75
Group 5.....	\$ 27.10	16.75
OPEN AIR CAISSON, UNDERPINNING WORK AND BORING CREW		
Bottom Man.....	\$ 31.10	16.75
Top Man & Laborer.....	\$ 30.15	16.75
TEST BORING		
Driller.....	\$ 31.55	16.75
Laborer.....	\$ 30.15	16.75

## LABORER CLASSIFICATIONS

GROUP 1: Laborer; Carpenter tender; Cement finisher tender; Wrecking laborer; Asbestos removers [non-mechanical systems]; Plant laborer; Driller in quarries

GROUP 2: Adzeperson; Asphalt raker; Barcotype jumping tamper; Chain saw operators; Concrete and power buggy operator; Concrete saw operator; Demolition burner; Fence and guard rail erector; Highway stone spreader; Laser beam operator; Mechanical grinder operator; Mason tender; Mortar mixer; Pneumatic tool operator; Riprap and dry stonewall builder; Scaffold erector; Setter of metal forms for roadways; Wagon drill operator; Wood chipper operator; Pipelayer; Pipe trench bracer

GROUP 3: Air track drill operator; Hydraulic and similar powered drills; Brick paver; Block paver; Rammer and curb setter; Powderperson and blaster

GROUP 4: Flagger & signaler

GROUP 5: Toxic waste remover

## LABORER - COMPRESSED AIR CLASSIFICATIONS

GROUP 1: Mucking machine operator, tunnel laborer, brake person, track person, miner, grout person, lock tender, gauge tender, miner: motor person & all others in compressed air

GROUP 2: Change house attendant, powder watchperson, top person on iron

GROUP 3: Hazardous waste work within the "HOT" zone

LABORER - FREE AIR CLASSIFICATIONS

GROUP 1: Grout person - pumps, brake person, track person, form mover & stripper (wood & steel), shaft laborer, laborer topside, outside motorperson, miner, conveyor operator, miner welder, heading motorperson, erecting operator, mucking machine operator, nozzle person, rodperson, safety miner, shaft & tunnel, steel & rodperson, mole nipper, concrete worker, form erector (wood, steel and all accessories), cement finisher (this type of work only), top signal person, bottom person (when heading is 50' from shaft), burner, shield operator and TBM operator

GROUP 2: Change house attendant, powder watchperson

GROUP 3: Hazardous waste work within the "HOT" zone

-----  
 PAIN0011-005 06/01/2009

	Rates	Fringes
PAINTER		
Brush, Roller, Taper, Wall		
Cover.....	\$ 27.65	15.27
Epoxy, Tanks, Towers,		
Swing Stage & Structural		
Steel.....	\$ 29.65	15.27
Spray, Sand & Water		
Blasting.....	\$ 28.65	15.27

-----  
 PAIN0011-006 06/01/2009

	Rates	Fringes
GLAZIER.....	\$ 31.73	14.55

FOOTNOTES:

SWING STAGE: \$1.00 per hour additional.

PAID HOLIDAYS: Labor Day & Christmas Day.

-----  
 PAIN0011-011 06/01/2009

	Rates	Fringes
Painter (Bridge Work).....	\$ 38.63	15.07

-----  
 PAIN0035-008 06/01/2009

	Rates	Fringes
Sign Painter.....	\$ 24.81	13.22

-----  
 PLAS0040-001 06/07/2009

BUILDING CONSTRUCTION

	Rates	Fringes
CEMENT MASON/CONCRETE FINISHER...	\$ 29.75	19.70
PLASTERER.....	\$ 30.50	18.95

FOOTNOTE: Cement Mason: Work on free swinging scaffolds under 3 planks width and which is 20 or more feet above ground and any offset structure: \$.30 per hour additional.

-----  
PLAS0040-002 07/20/2009

HEAVY AND HIGHWAY CONSTRUCTION

	Rates	Fringes
CEMENT MASON/CONCRETE FINISHER...	\$ 27.00	15.15

-----  
PLUM0051-002 03/01/2010

	Rates	Fringes
Plumbers and Pipefitters.....	\$ 34.36	24.47

-----  
ROOF0033-004 01/01/2010

	Rates	Fringes
ROOFER, Including Built Up, Composition and Single Ply Roofs.....	\$ 29.45	17.70

-----  
SFRI0676-001 01/01/2010

	Rates	Fringes
SPRINKLER FITTER.....	\$ 39.50	17.85

-----  
SHEE0017-002 07/01/2006

	Rates	Fringes
Sheet Metal Worker.....	\$ 29.60	22.61

-----  
TEAM0251-001 05/01/2009

HEAVY AND HIGHWAY CONSTRUCTION

	Rates	Fringes
TRUCK DRIVER		
GROUP 1.....	\$ 25.71	14.0525+A+B
GROUP 2.....	\$ 25.86	14.0525+A+B
GROUP 3.....	\$ 25.91	14.0525+A+B
GROUP 4.....	\$ 25.96	14.0525+A+B
GROUP 5.....	\$ 26.06	14.0525+A+B
GROUP 6.....	\$ 26.21	14.0525+A+B
GROUP 7.....	\$ 26.46	14.0525+A+B
GROUP 8.....	\$ 26.16	14.0525+A+B
GROUP 9.....	\$ 26.41	14.0525+A+B

GROUP 10.....\$ 26.66      14.0525+A+B

FOOTNOTES:

A. Paid Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day and Christmas Day, plus Washington's Birthday, Columbus Day, Veteran's Day & V-J Day, providing the employee has worked at least one day in the calendar week in which the holiday falls.

B. Employee who has been on the payroll for 1 year or more but less than 5 years and has worked 150 Days during the last year of employment shall receive 1 week's paid vacation; 5 to 10 years - 2 weeks' paid vacation; 10 or more years - 3 week's paid vacation.

Tunnel rate for trucks actually going underground - add .40 per hour to rate according to equipment.

On equipment used to haul powder add .25 per hour above rate according to axle.

All drivers working on a defined hazard material job site shall be paid a premium of \$2.00 per hour over applicable rate.

TRUCK DRIVER CLASSIFICATIONS

GROUP 1: Pick-up trucks, station wagons, & panel trucks

GROUP 2: Stake body on low beds

GROUP 3: Two-axle dump truck

GROUP 4: Three-axle dump truck

GROUP 5: Four- and five-axle equipment

GROUP 6: Low-bed or boom trailer

GROUP 8: Special earth-moving equipment, under 35 tons

GROUP 9: Special earth-moving equipment, 35 tons or over

GROUP 10: Tractor trailer

-----

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

=====

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29 CFR 5.5 (a)(1)(ii)).

-----

In the listing above, the "SU" designation means that rates listed under the identifier do not reflect collectively

bargained wage and fringe benefit rates. Other designations indicate unions whose rates have been determined to be prevailing.

-----  
WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter? This can be:

- \* an existing published wage determination
- \* a survey underlying a wage determination
- \* a Wage and Hour Division letter setting forth a position on a wage determination matter
- \* a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determinations  
Wage and Hour Division  
U.S. Department of Labor  
200 Constitution Avenue, N.W.  
Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator  
U.S. Department of Labor  
200 Constitution Avenue, N.W.  
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.


3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board  
U.S. Department of Labor  
200 Constitution Avenue, N.W.  
Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.


=====

END OF GENERAL DECISION

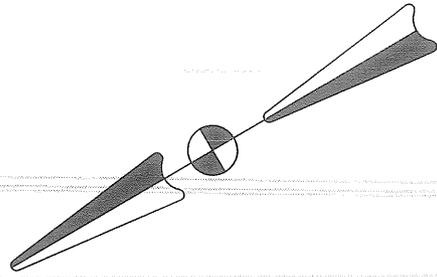

CCB

CFP



PS

CFP

CLEAN VORTECHS MODEL 9000

ATTACH FRAME AND COVER TO DRAINAGE STRUCTURE

CMH


200' RIVERBANK WETLAND

50' PERIMETER WETLAND

S.F.L. PLAT NO. 11

C4

<p><b>CROSSMAN ENGINEERING, INC.</b> Civil - Transportation - Environmental - Site Planning - Land Surveying  151 Centerville Road Warwick, Rhode Island 02886</p>	<p>TITLE OF SKETCH DRAINAGE AND UTILITY PLAN NO. 04 CRANSTON BMP_SC_020</p>	<p>R.I. Contract No. 2010-CH-020</p>	<p>Sketch No. 1</p>
<p>04/23/10</p>	<p>ADDENDUM NUMBER 3</p>	<p>Revision to Sheet No. 10</p>	

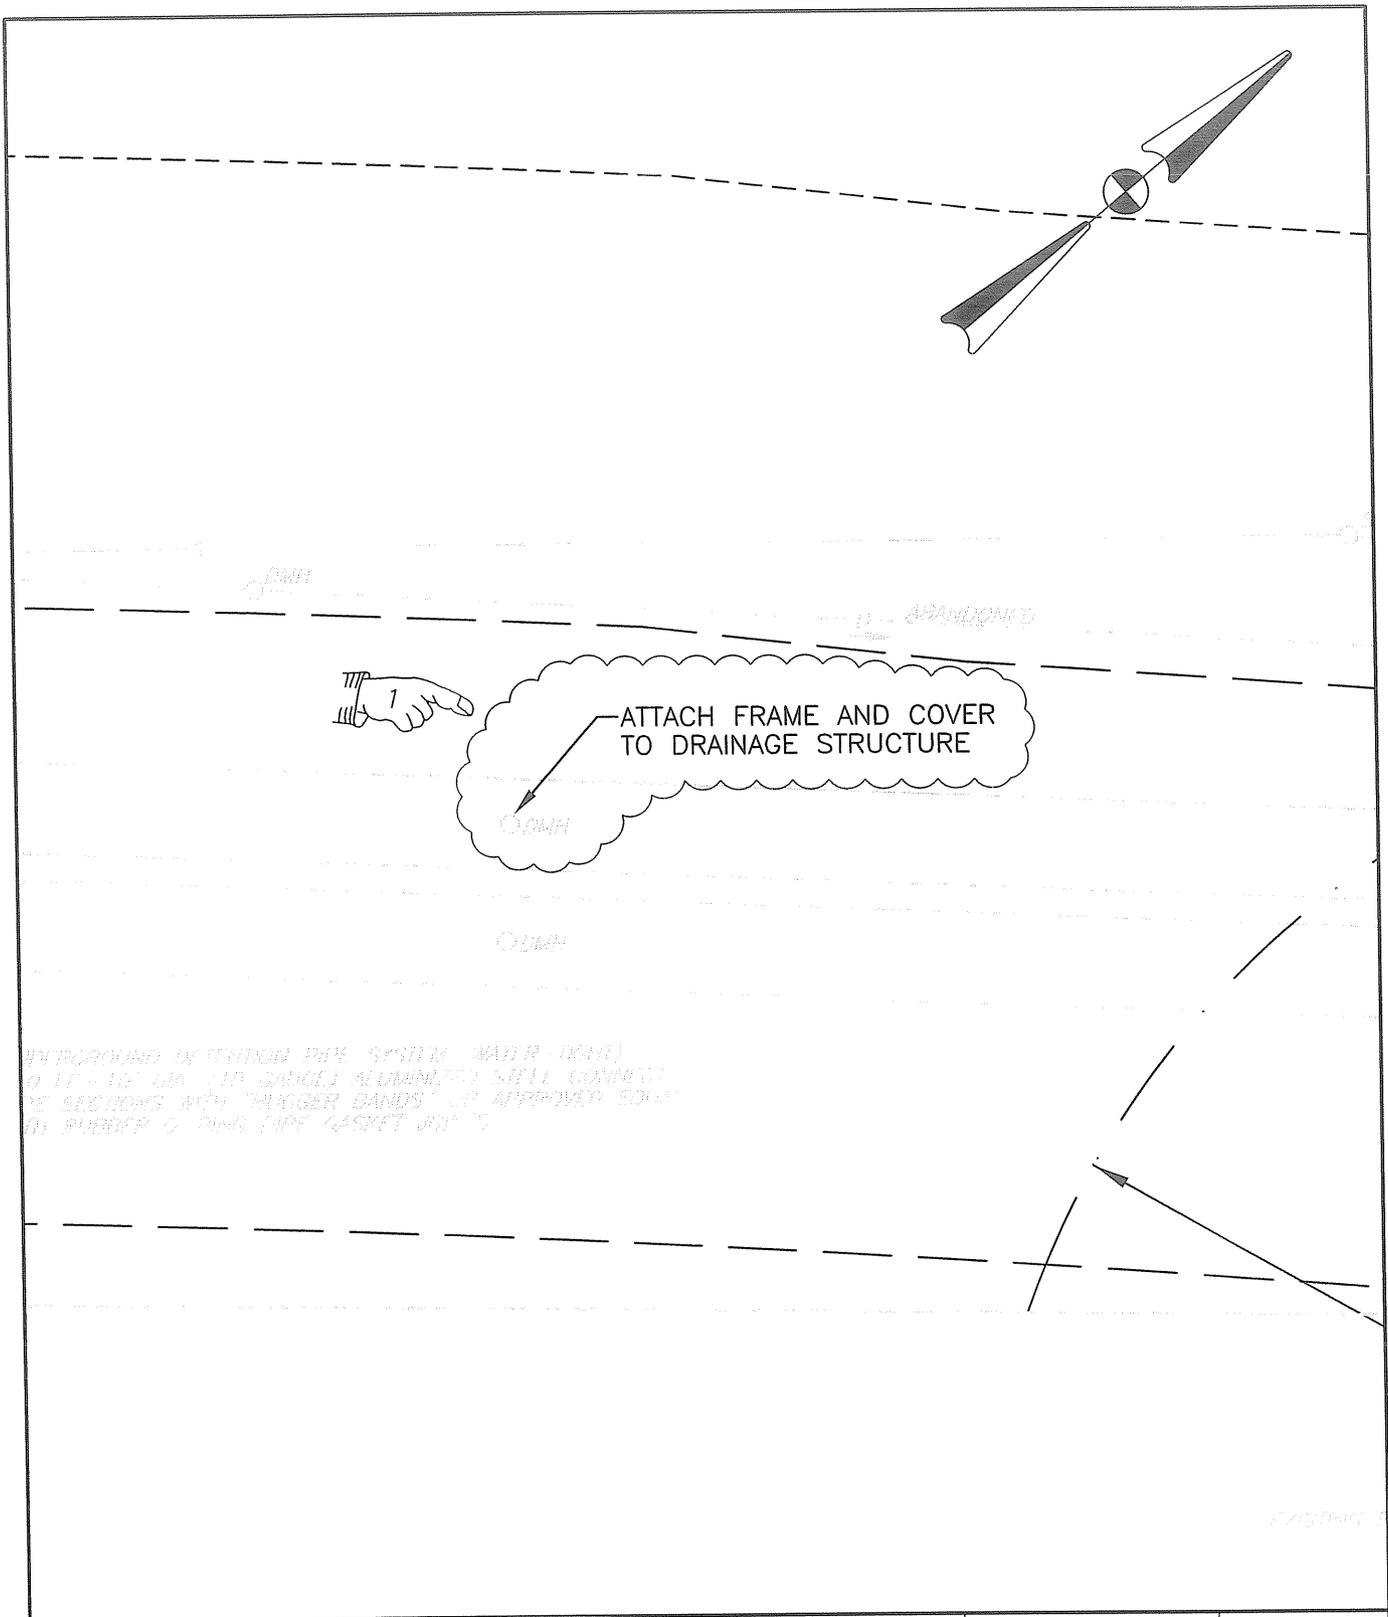


<p><b>CROSSMAN ENGINEERING, INC.</b>  <small>Civil - Transportation - Environmental - Site Planning - Land Surveying</small></p>  <p>151 Centerville Road  Warwick, Rhode Island 02886</p>	<p>TITLE OF SKETCH  <b>DRAINAGE AND UTILITY</b>  PLAN NO. 07  CRANSTON BMP_SC_120</p>	<p>R.I. Contract No.  2010-CH-020</p>	<p>Sketch No.  2</p>
<p>04/23/10</p>	<p>ADDENDUM NUMBER 3</p>	<p>Revision to Sheet No. 13</p>	


VICTORY HIGHWAY (ROUTE 102)




EXISTING S.H.L. PLAT NO. 391

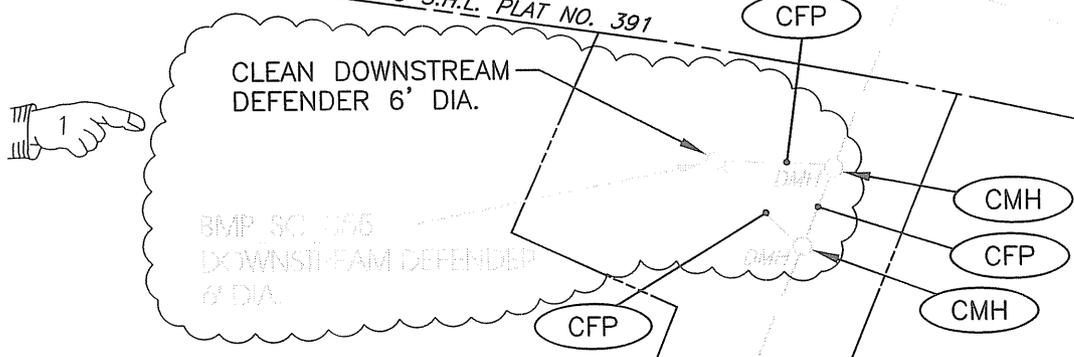


<p><b>CROSSMAN ENGINEERING, INC.</b>          Civil - Transportation - Environmental - Site Planning - Land Surveying   151 Centerville Road          Warwick, Rhode Island 02886</p>	<p>TITLE OF SKETCH  <b>DRAINAGE AND UTILITY</b>          PLAN NO. 08          EXETER BMP_SC_055</p>	<p>R.I. Contract No.          2010-CH-020</p>	<p>Sketch No.          3</p>
<p>04/23/10</p>	<p>ADDENDUM NUMBER 3</p>	<p>Revision to Sheet No. 14</p>	

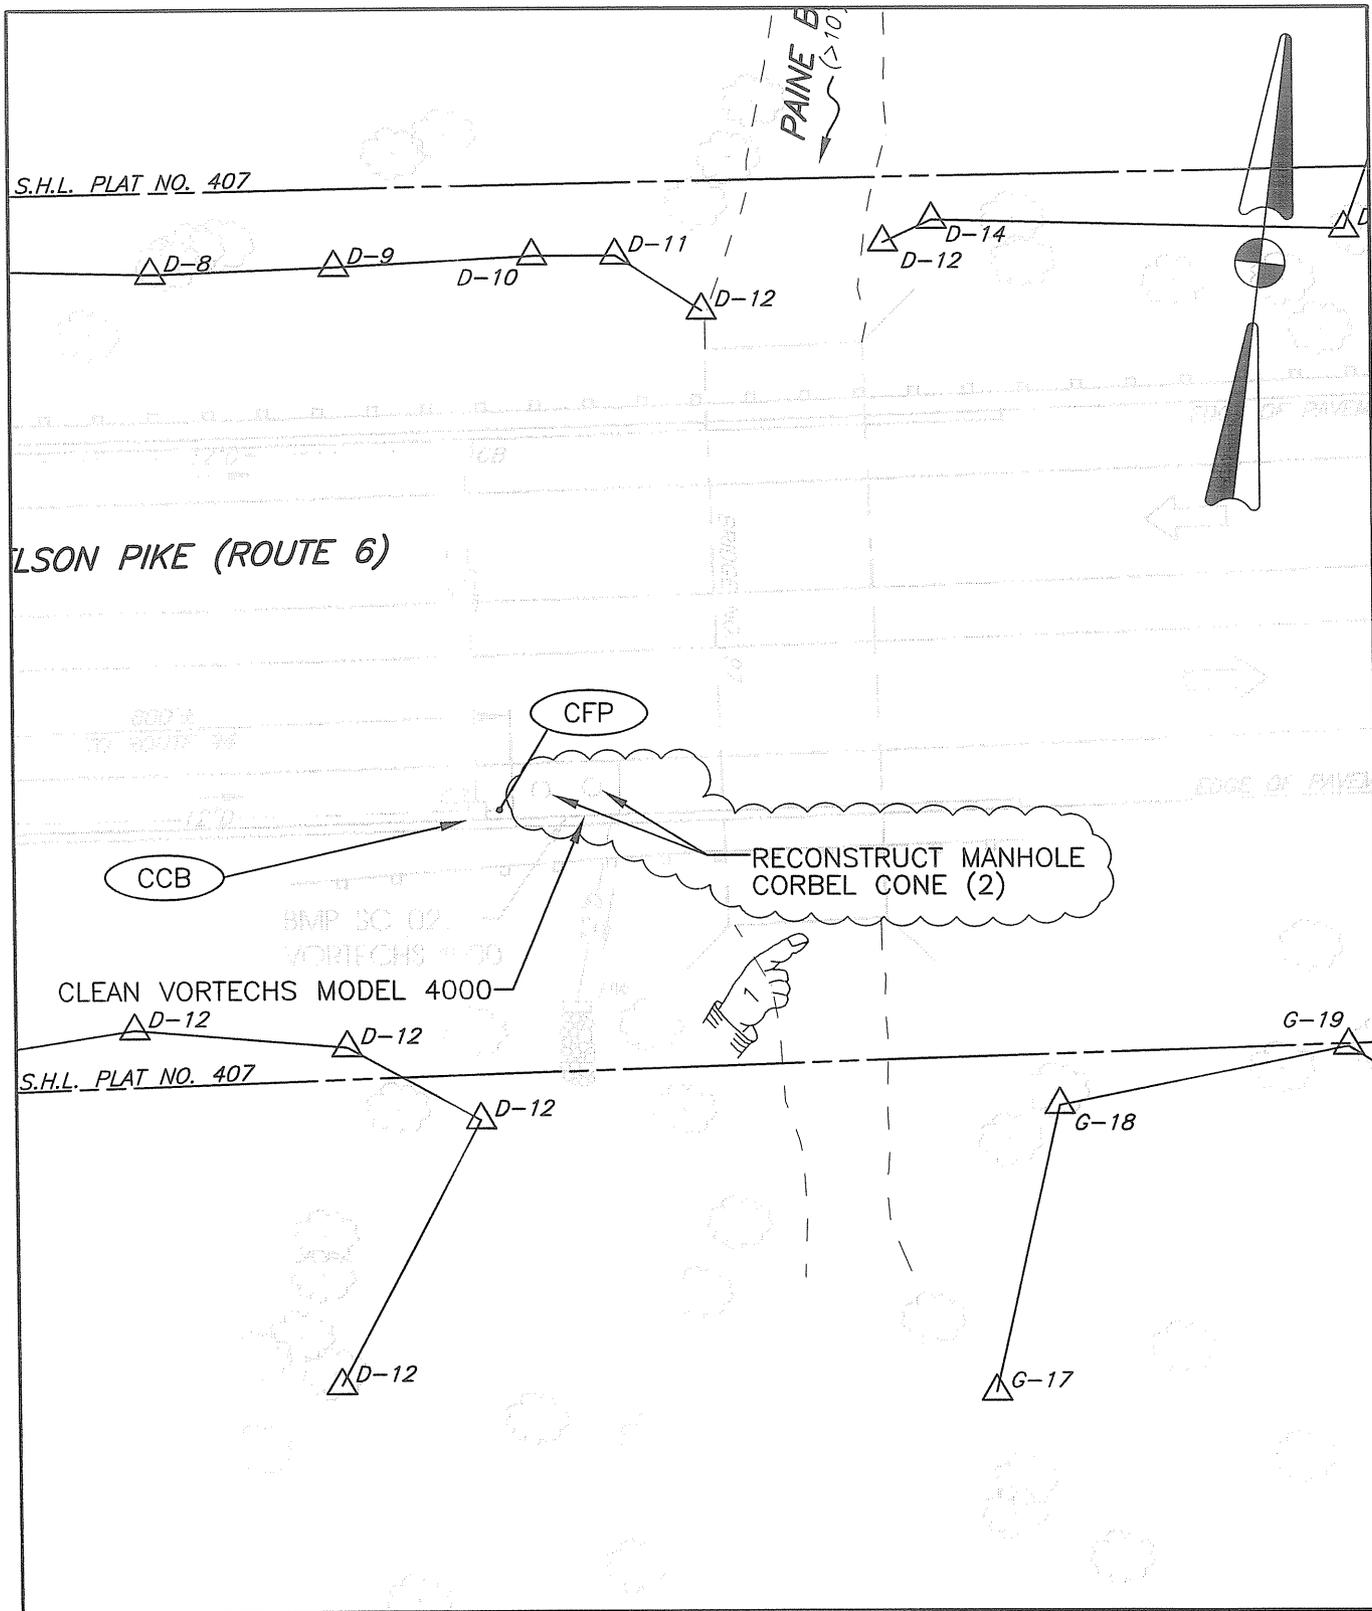


<p><b>CROSSMAN ENGINEERING, INC.</b>  <small>Civil - Transportation - Environmental - Site Planning - Land Surveying</small></p>  <p>151 Centerville Road  Warwick, Rhode Island 02886</p>	<p>TITLE OF SKETCH  <b>DRAINAGE AND UTILITY</b>  PLAN NO. 09  <b>FOSTER BMP_SC_027</b></p>	<p>R.I. Contract No.  <b>2010-CH-020</b></p>	<p>Sketch No.  <b>4</b></p>
<p>04/23/10</p>	<p>ADDENDUM NUMBER 3</p>	<p>Revision to Sheet No. 15</p>	

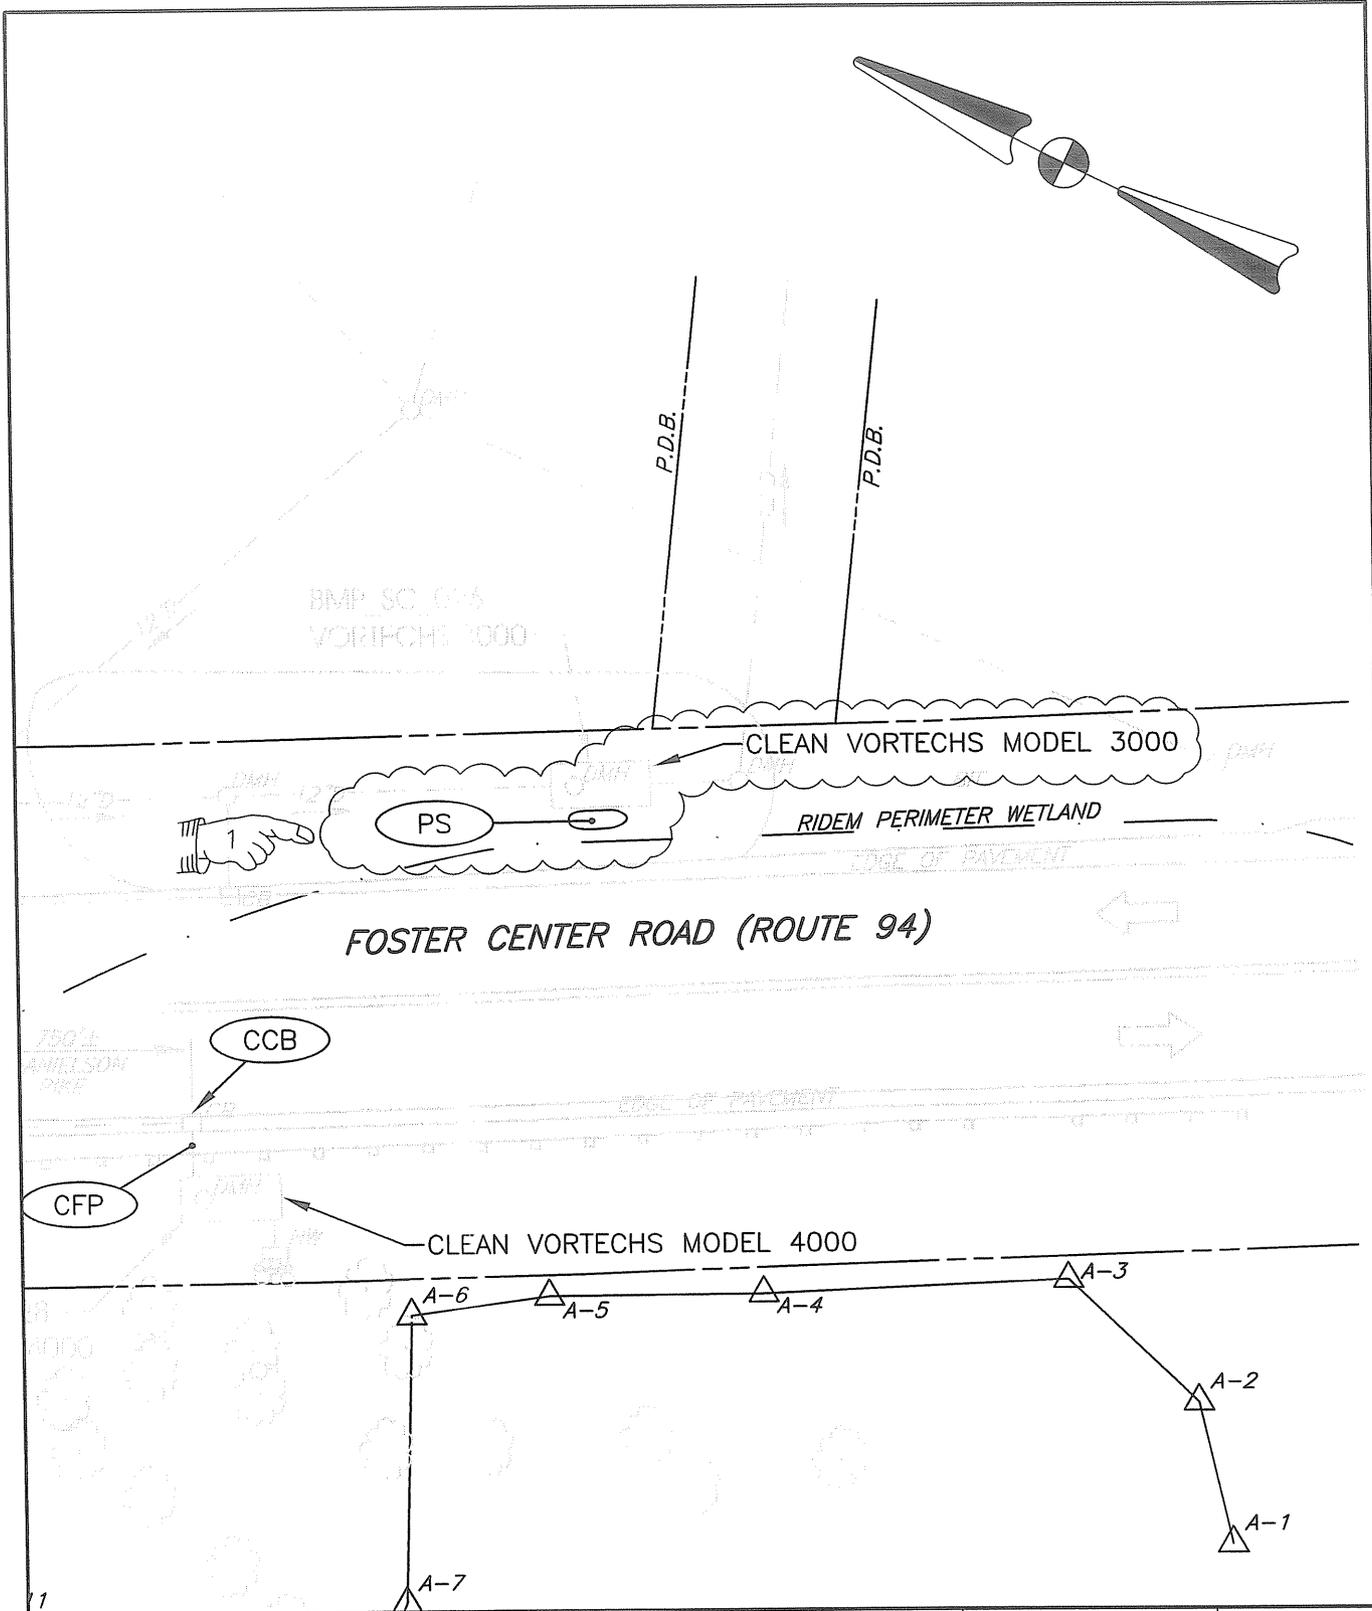

<p><b>CROSSMAN ENGINEERING, INC.</b>          Civil - Transportation - Environmental - Site Planning - Land Surveying   151 Centerville Road          Warwick, Rhode Island 02886</p>	<p>TITLE OF SKETCH  <b>DRAINAGE AND UTILITY          PLAN NO. 10          FOSTER BMP_SC_028</b></p>	<p>R.I. Contract No.          2010-CH-020</p>	<p>Sketch No.          5</p>
<p>04/23/10</p>	<p>ADDENDUM NUMBER 3</p>	<p>Revision to Sheet No. 16</p>	

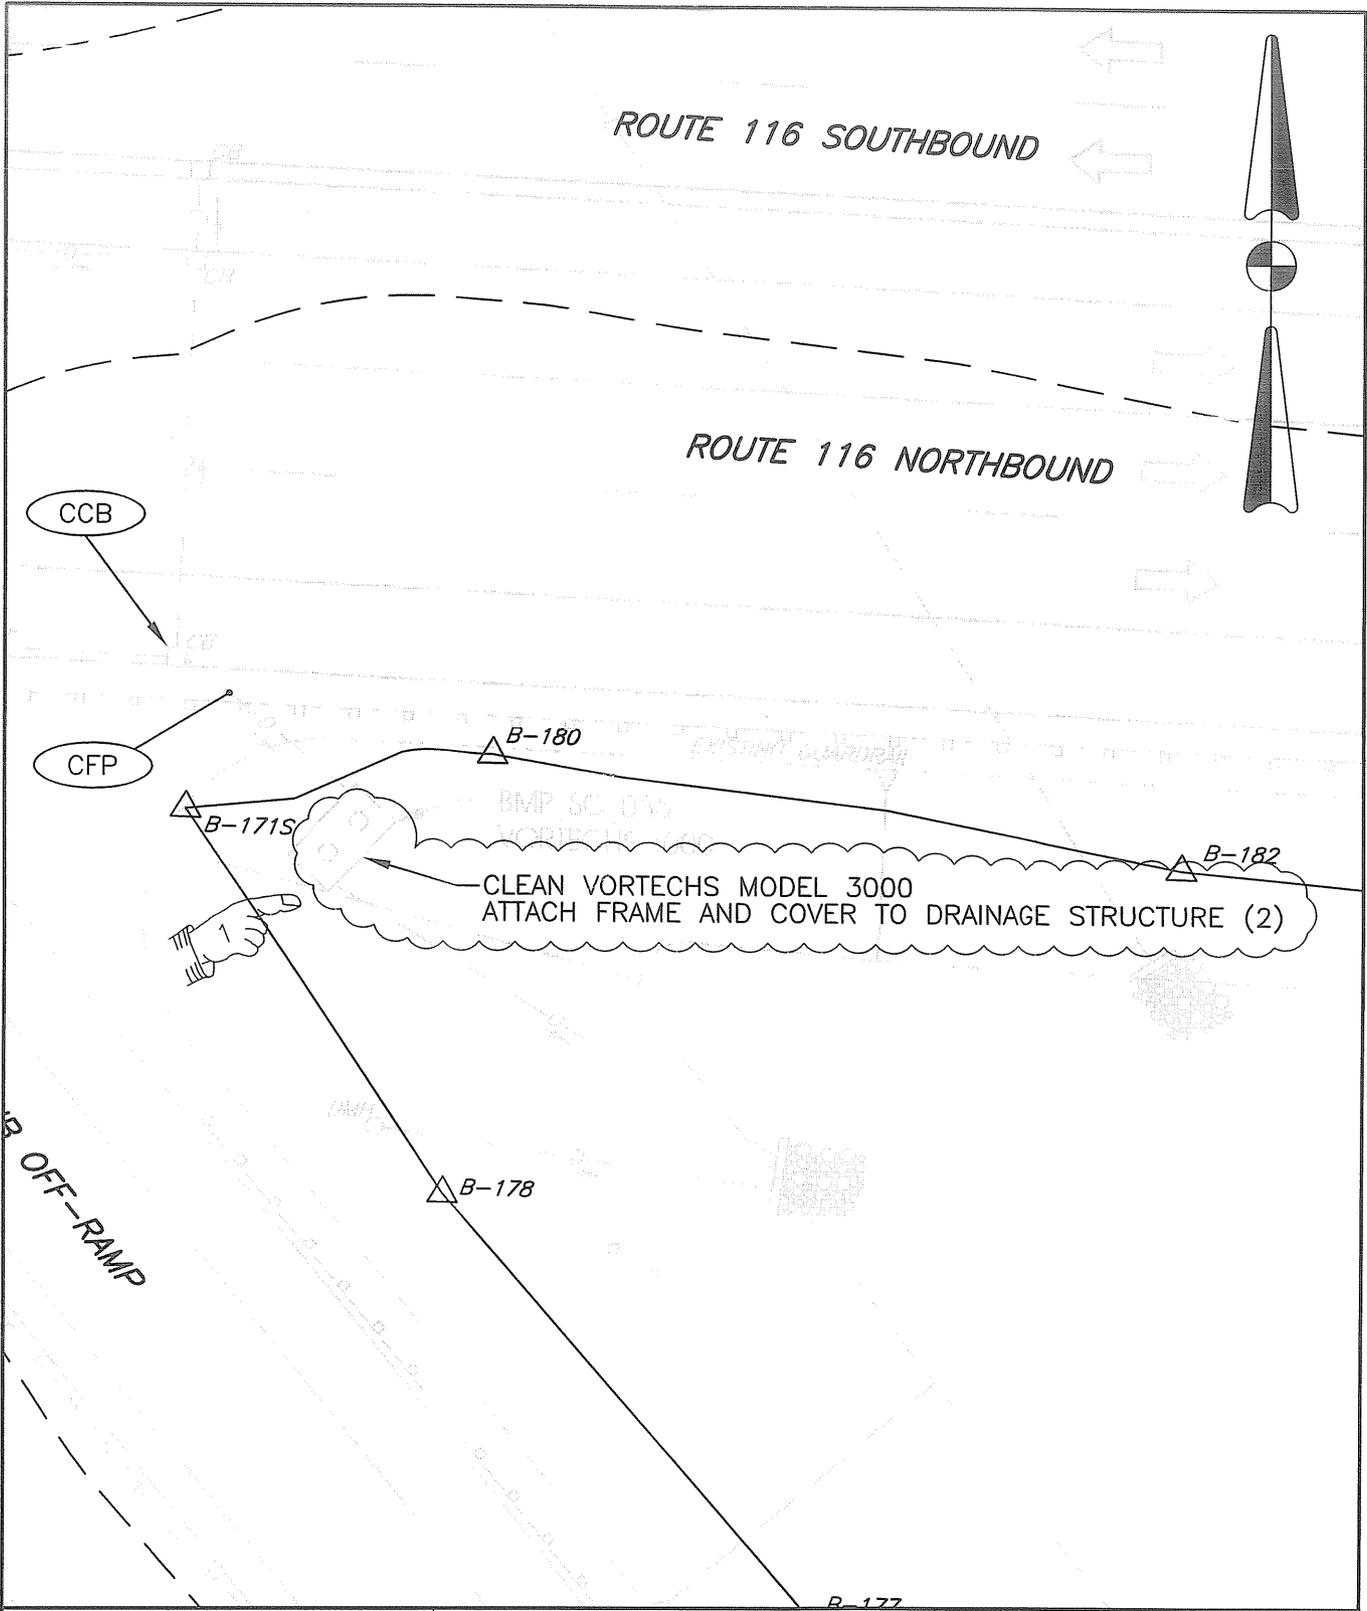

<p><b>CROSSMAN ENGINEERING, INC.</b>  <small>Civil - Transportation - Environmental - Site Planning - Land Surveying</small></p>  <p>151 Centerville Road  Warwick, Rhode Island 02886</p>	<p>TITLE OF SKETCH  <b>DRAINAGE AND UTILITY</b>  <b>PLAN NO. 20</b>  <b>LINCOLN BMP_SC_035</b></p>	<p>R.I. Contract No.  <b>2010-CH-020</b></p>	<p>Sketch No.  <b>6</b></p>
<p>04/23/10</p>	<p>ADDENDUM NUMBER 3</p>	<p>Revision to Sheet No. 26</p>	




MATCHLINE TO DRAINAGE AND UTILITY PLAN NO. 28


28



<p><b>CROSSMAN ENGINEERING, INC.</b> Civil - Transportation - Environmental - Site Planning - Land Surveying  151 Centerville Road Warwick, Rhode Island 02886</p>	<p>TITLE OF SKETCH DRAINAGE AND UTILITY PLAN NO. 27 NEWPORT BMP_OS_090-091</p>	<p>R.I. Contract No. 2010-CH-020</p>	<p>Sketch No. 7</p>
<p>04/23/10</p>	<p>ADDENDUM NUMBER 3</p>	<p>Revision to Sheet No. 33</p>	

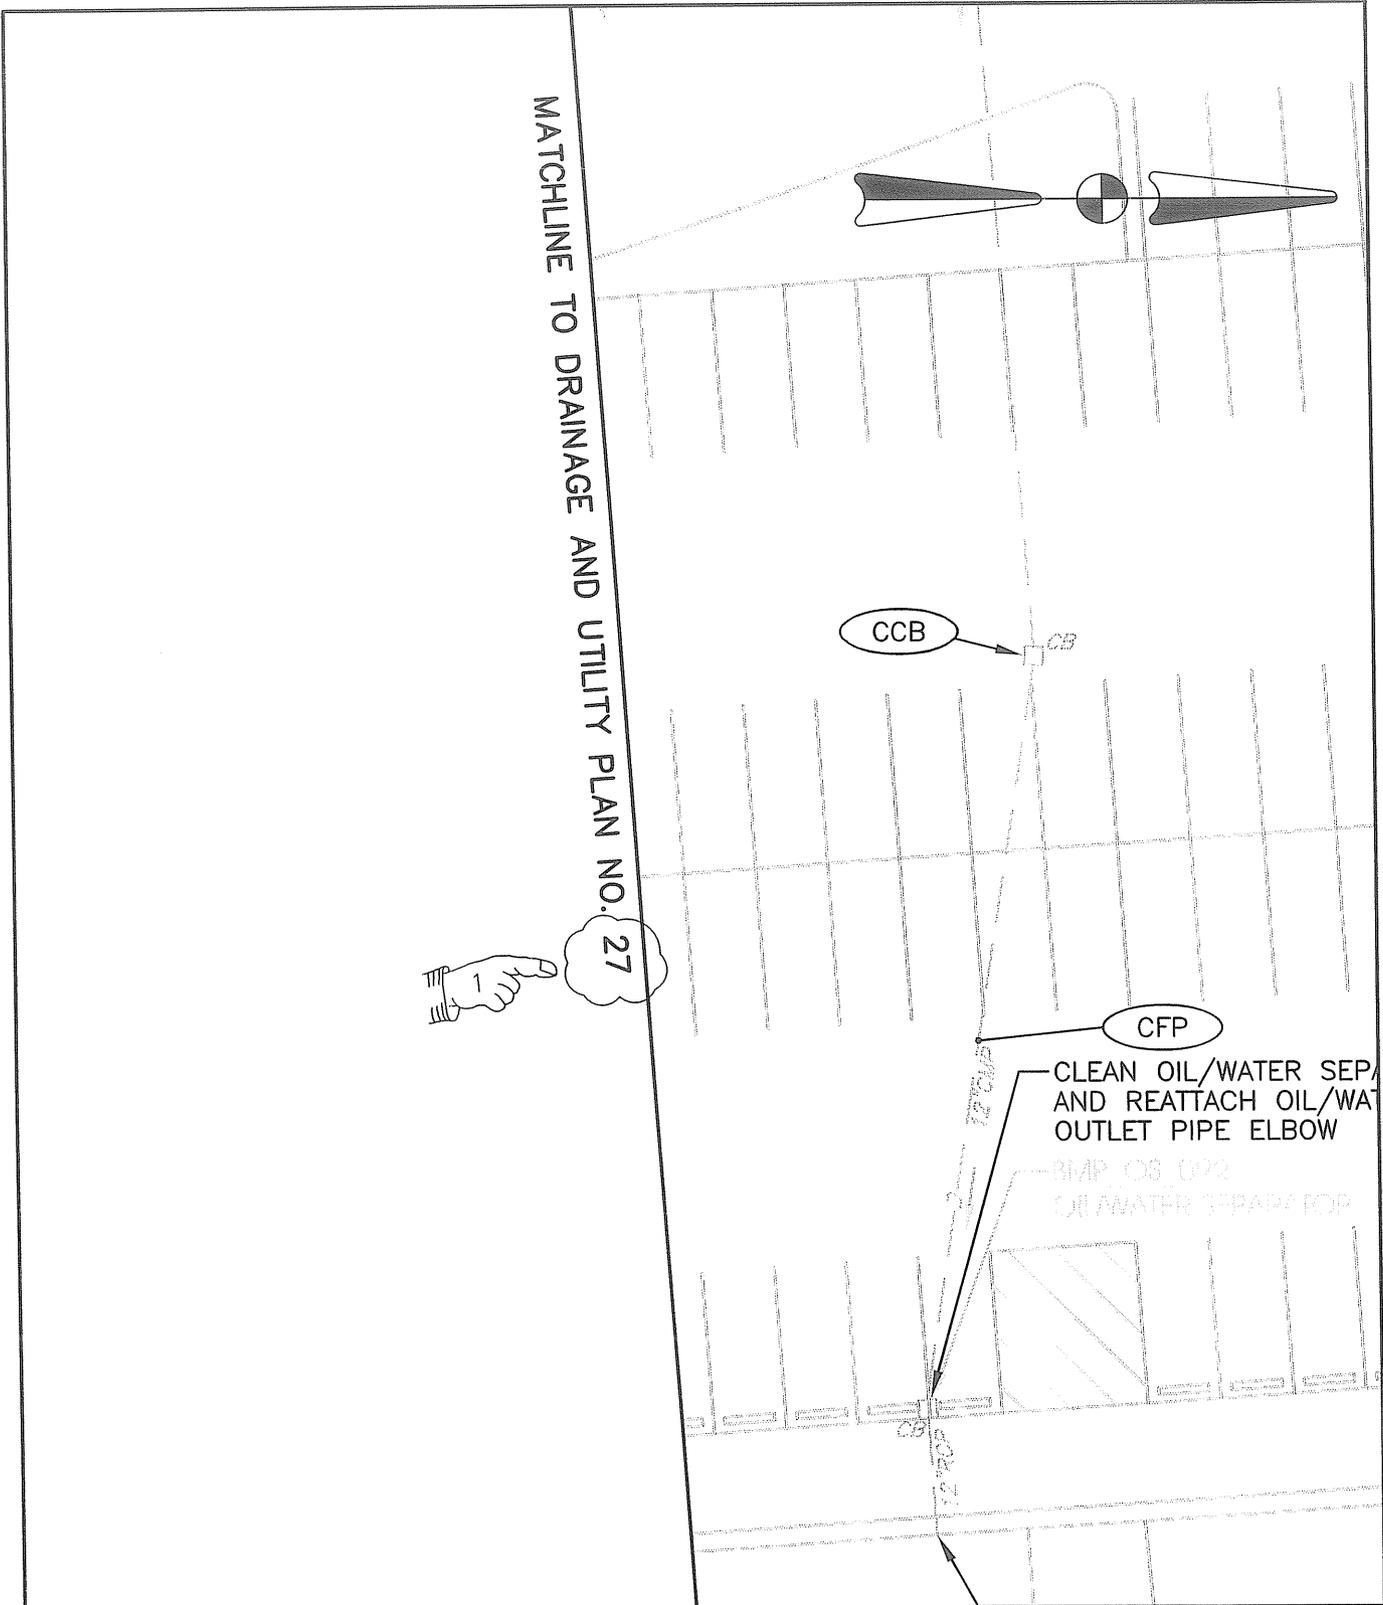

<p>CROSSMAN ENGINEERING, INC.  <small>Civil - Transportation - Environmental - Site Planning - Land Surveying</small>   151 Centerville Road          Warwick, Rhode Island 02886</p>	<p>TITLE OF SKETCH          DRAINAGE AND UTILITY          PLAN NO. 28          NEWPORT BMP_OS_092-093</p>	<p>R.I. Contract No.          2010-CH-020</p>	<p>Sketch No.          8</p>
<p>04/23/10</p>	<p>ADDENDUM NUMBER 3</p>	<p>Revision to Sheet No. 34</p>	

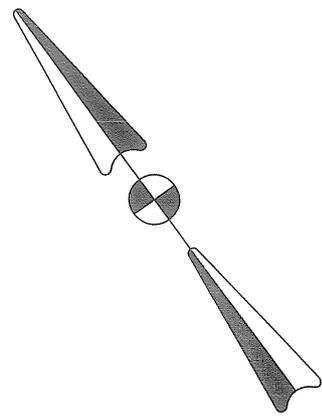


EXISTING S.F.L. PLAT NO. 943

CLEAN VORTECHS MODEL 7000

BMP SC\_009  
VORTECHS 7000

ATTACH FRAME AND COVER  
TO DRAINAGE STRUCTURE (2)

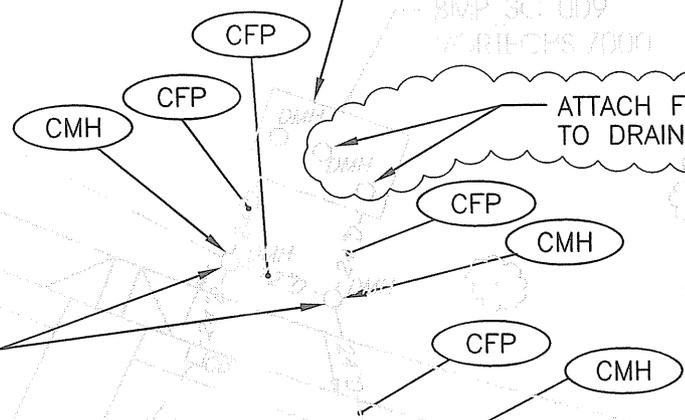


SEE NOTE

EXISTING CURB


CHARLES STREET

EXISTING CURB


<p><b>CROSSMAN ENGINEERING, INC.</b> Civil - Transportation - Environmental - Site Planning - Land Surveying</p>  <p>151 Centerville Road Warwick, Rhode Island 02886</p>	<p>TITLE OF SKETCH DRAINAGE AND UTILITY PLAN NO. 29 NORTH PROVIDENCE BMP_SC_009</p>	<p>R.I. Contract No. 2010-CH-020</p>	<p>Sketch No. 9</p>
<p>04/23/10</p>	<p>ADDENDUM NUMBER 3</p>	<p>Revision to Sheet No. 35</p>	

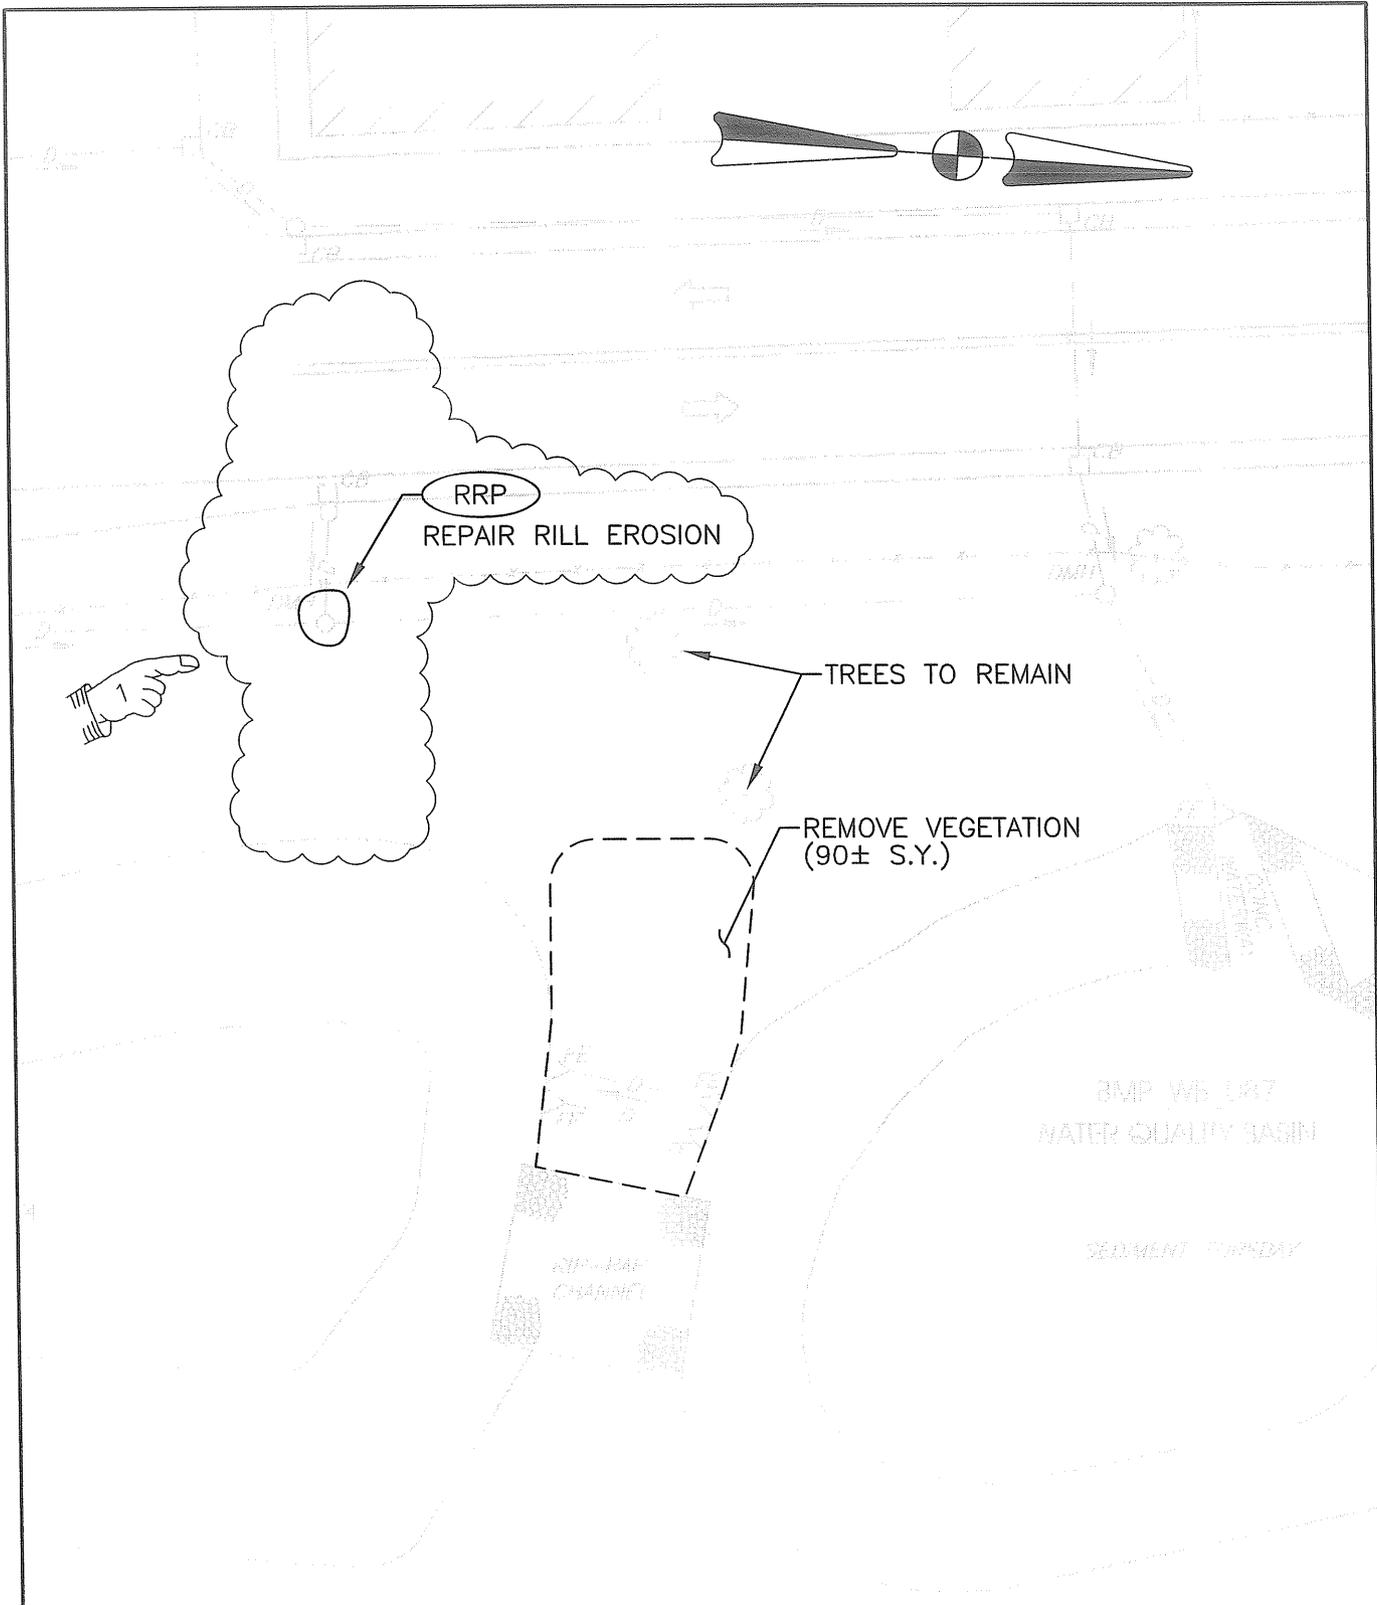


<p><b>CROSSMAN ENGINEERING, INC.</b>  <small>Civil - Transportation - Environmental - Site Planning - Land Surveying</small></p>  <p>151 Centerville Road  Warwick, Rhode Island 02886</p>	<p>TITLE OF SKETCH  DRAINAGE AND UTILITY  PLAN NO. 32  PROVIDENCE BMP_WB_087</p>	<p>R.I. Contract No.  2010-CH-020</p>	<p>Sketch No.  10</p>
<p>04/23/10</p>	<p>ADDENDUM NUMBER 3</p>	<p>Revision to Sheet No. 38</p>	




DASH  
7MM

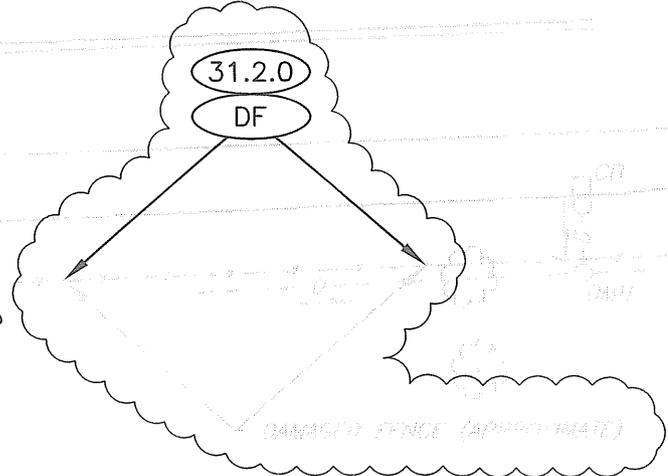

<p><b>CROSSMAN ENGINEERING, INC.</b>  <small>Civil - Transportation - Environmental - Site Planning - Land Surveying</small></p>  <p>151 Centerville Road  Warwick, Rhode Island 02886</p>	<p>TITLE OF SKETCH  DRAINAGE AND UTILITY  PLAN NO. 32  PROVIDENCE BMP_WB_087</p>	<p>R.I. Contract No.  2010-CH-020</p>	<p>Sketch No.  11</p>
<p>04/23/10</p>	<p>ADDENDUM NUMBER 3</p>	<p>Revision to Sheet No. 38</p>	


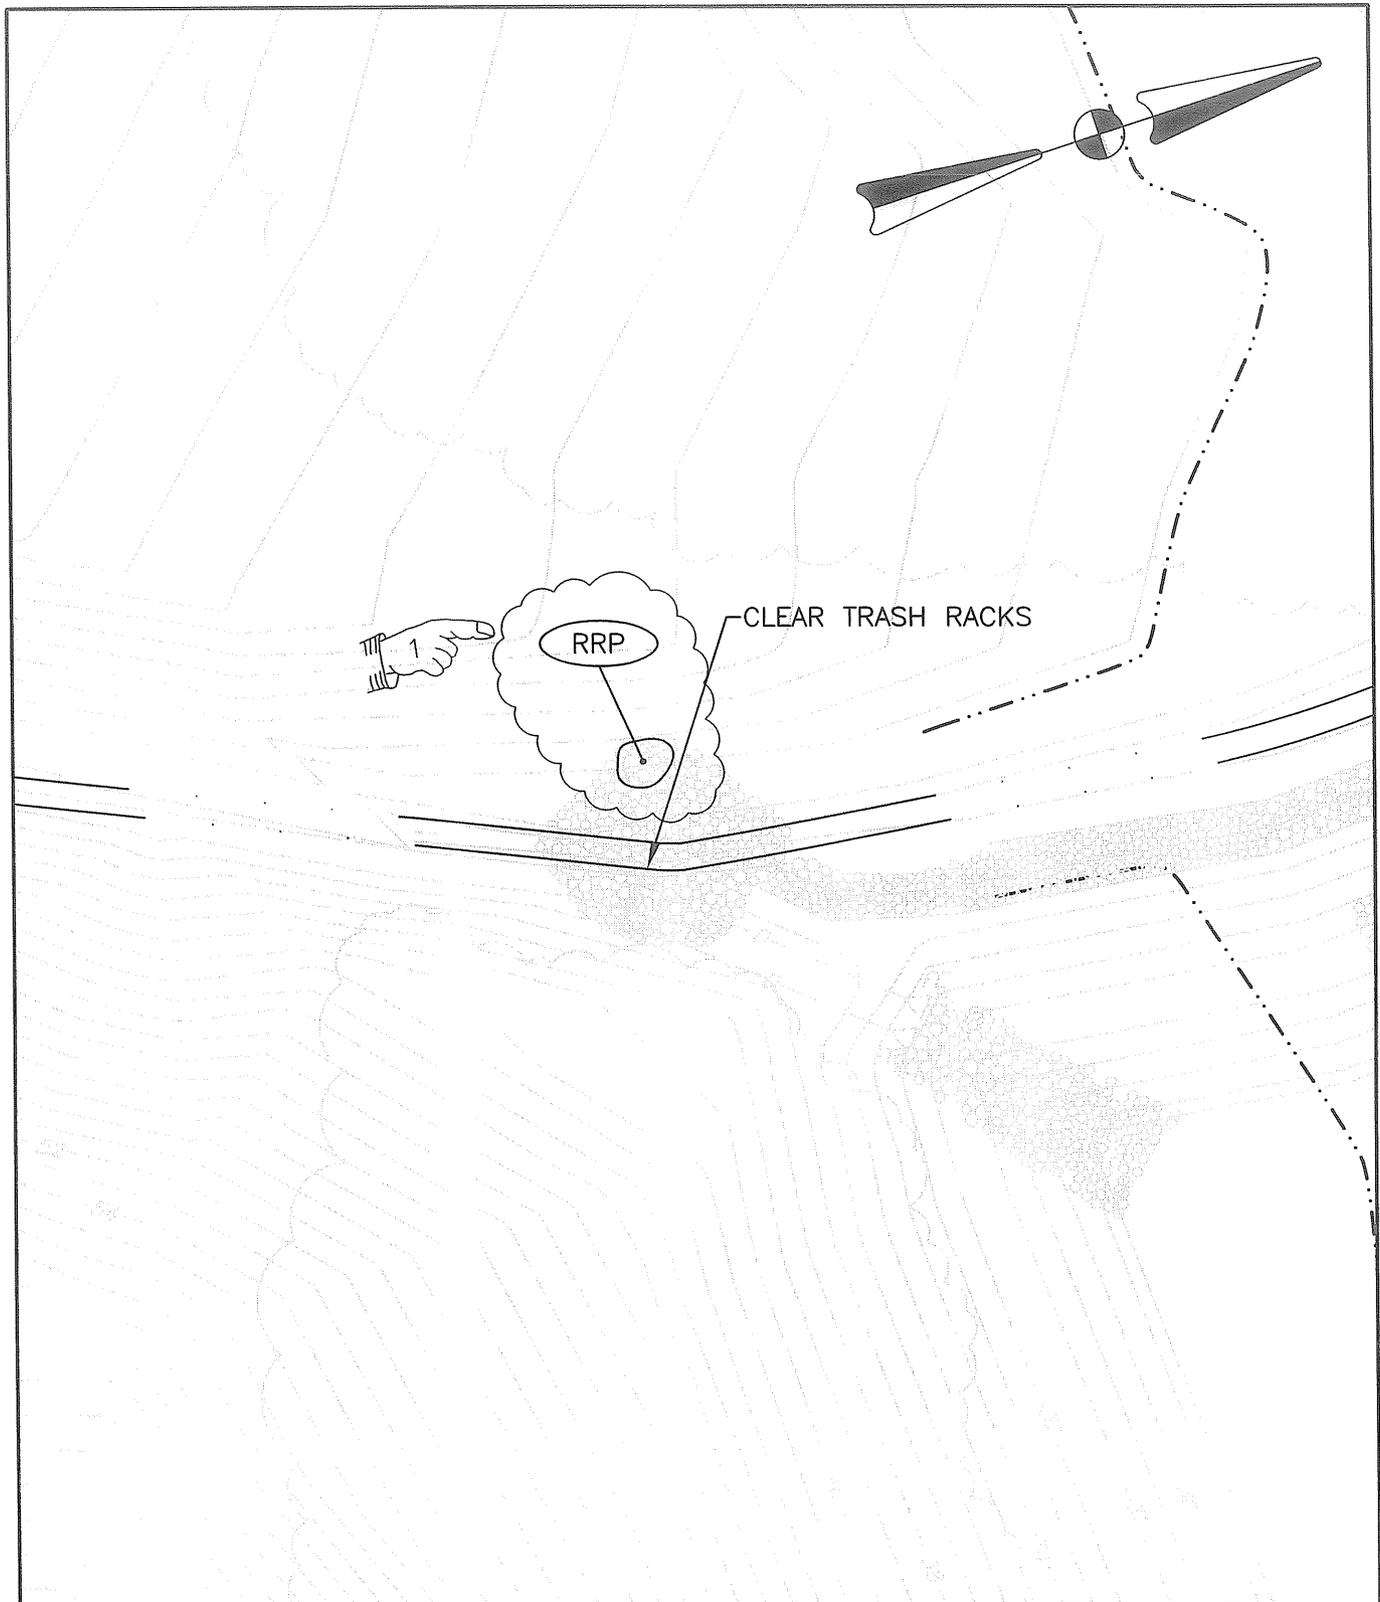


<p><b>CROSSMAN ENGINEERING, INC.</b>  <small>Civil - Transportation - Environmental - Site Planning - Land Surveying</small></p>  <p>151 Centerville Road  Warwick, Rhode Island 02886</p>	<p>TITLE OF SKETCH  DRAINAGE AND UTILITY  PLAN NO. 45  WARWICK BMP_WB_015</p>	<p>R.I. Contract No.  2010-CH-020</p>	<p>Sketch No.  12</p>
<p>04/23/10</p>	<p>ADDENDUM NUMBER 3</p>	<p>Revision to Sheet No. 51</p>	

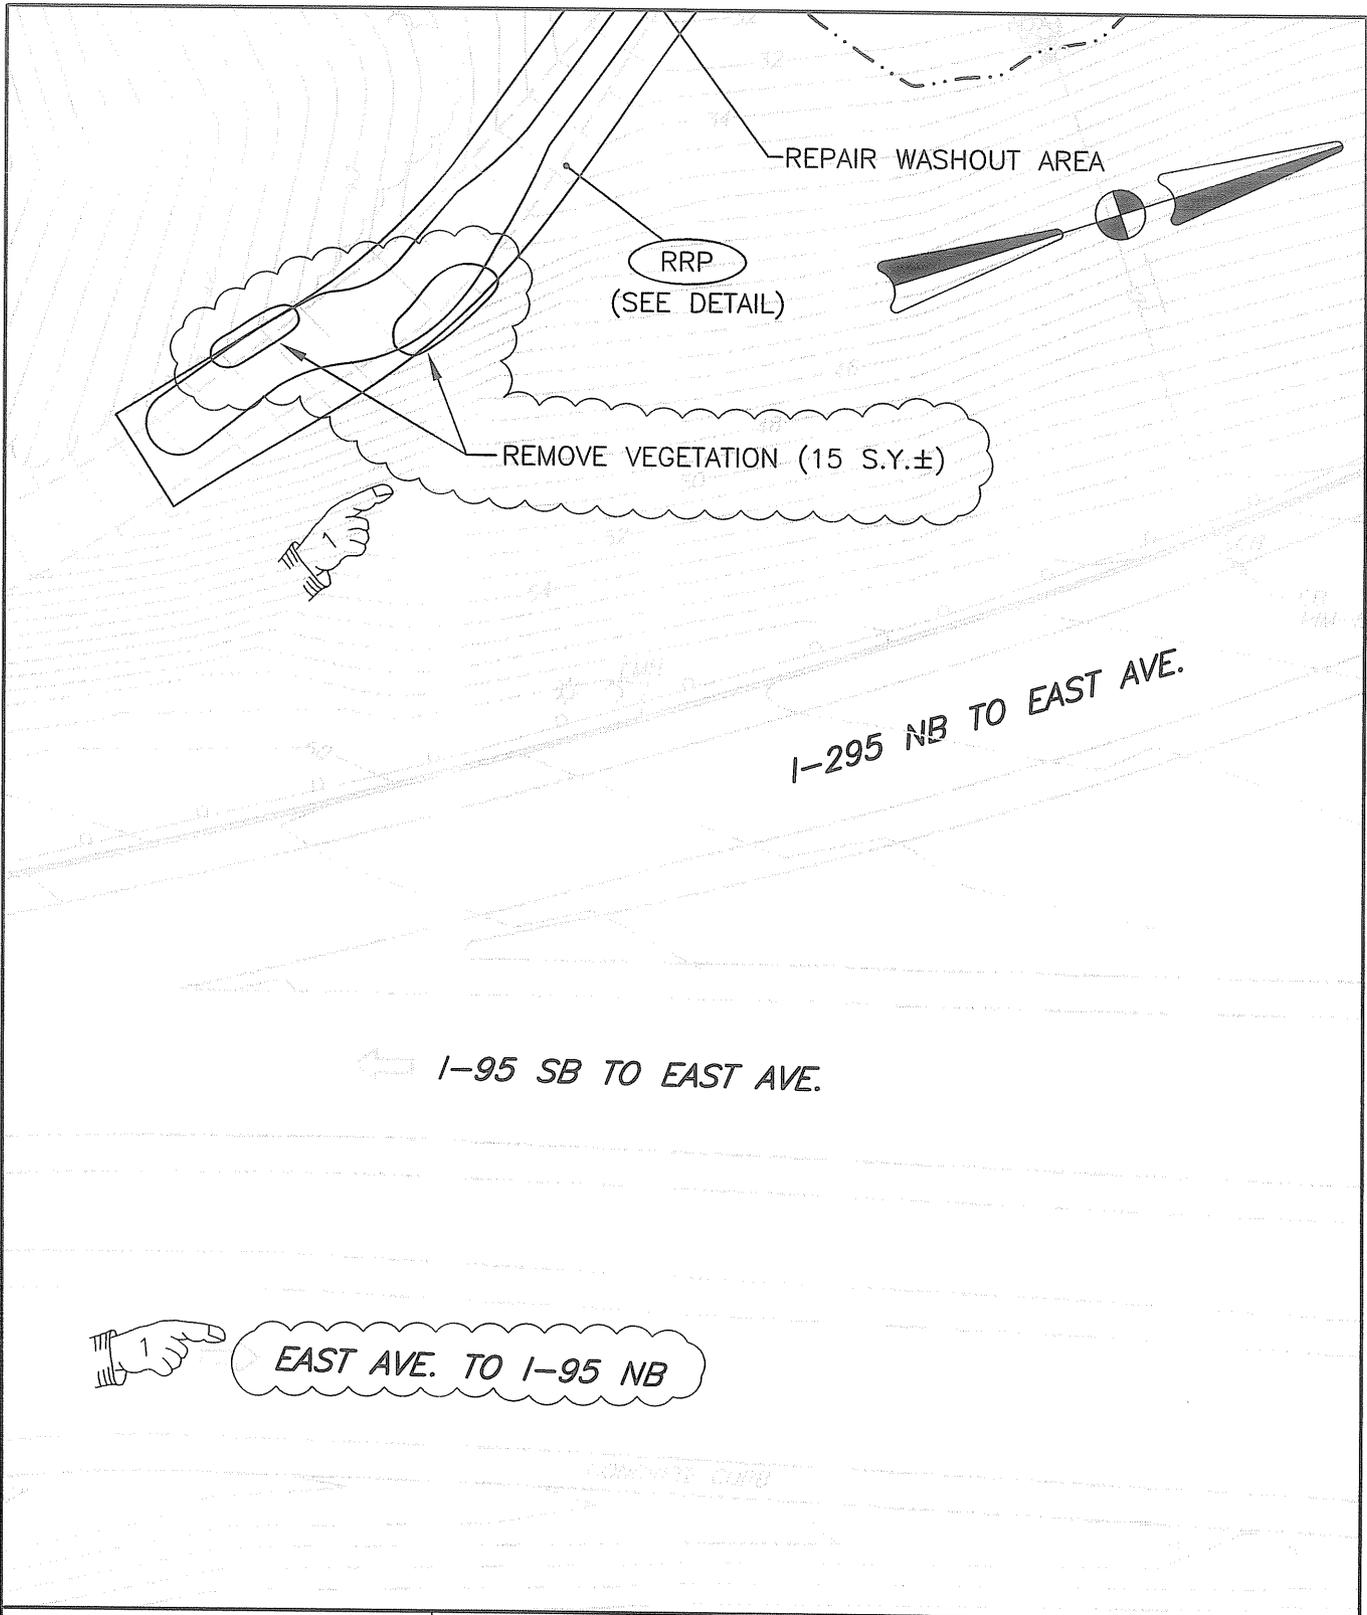


<p><b>CROSSMAN ENGINEERING, INC.</b>  <small>Civil - Transportation - Environmental - Site Planning - Land Surveying</small></p>  <p>151 Centerville Road  Warwick, Rhode Island 02886</p>	<p>TITLE OF SKETCH  DRAINAGE AND UTILITY  PLAN NO. 45  WARWICK BMP_WB_015</p>	<p>R.I. Contract No.  2010-CH-020</p>	<p>Sketch No.  13</p>
<p>04/23/10</p>	<p>ADDENDUM NUMBER 3</p>	<p>Revision to Sheet No. 51</p>	

STREET LINE



STREET LINE

CLEAN VORTECHS MODEL 11000

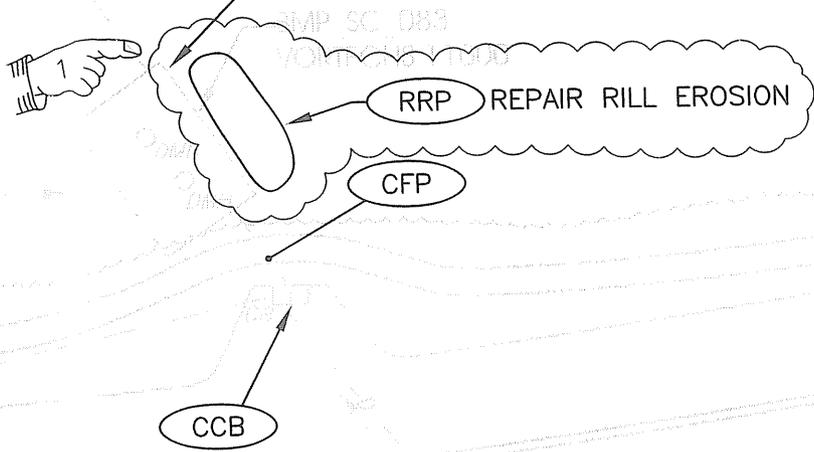

EDGE TO LOW LAMP

ROAD

STREET LINE

CROSSMAN ENGINEERING, INC.  
Civil - Transportation - Environmental - Site Planning - Land Surveying



151 Centerville Road  
Warwick, Rhode Island 02886

TITLE OF SKETCH  
DRAINAGE AND UTILITY  
PLAN NO. 48  
WARWICK BMP\_SC\_083

R.I. Contract No.

2010-CH-020

Sketch No.

14

04/23/10

ADDENDUM NUMBER 3

Revision to Sheet No. 54

## Table of Contents - Distribution of Quantities

Project Name - Statewide Stormdrain Retrofit Project - BMP Monitoring  
 Estimate Name - Addendum No. 3  
 R.I. Contract No. - 2010-CH-020  
 FAP Nos: STP-SDRP(008)

ItemCode	Description	Page
201.0409	REMOVE AND DISPOSE FLEXIBLE PAVEMENT	1
201.0412	<b>** ITEM DELETED **</b>	1
201.0419	REMOVE AND DISPOSE FENCE	1
201.0428	REMOVE AND DISPOSE FRAME AND GRATE OR FRAME AND COVER	1
201.9902	REMOVE AND DISPOSE CATCH BASIN FILTER	1
201.9903	REMOVE AND DISPOSE DRAINAGE GRATE	2
201.9904	<b>REMOVE VEGETATION</b>	2
202.0100	EARTH EXCAVATION	2
202.0700	<b>COMMON BORROW</b>	2
203.0530	DEWATERING	3
206.0220	SILT FENCE STANDARD 9.2.0	3
212.2000	CLEANING AND MAINTENANCE OF EROSION CONTROLS	3
401.0300	BITUMINOUS SURFACE COURSE TYPE I-2	3
701.9901	FURNISH AND INSTALL DUCKBILL CHECK VALVE	3
701.9902	CATCH BASIN HOOD FOR 18-INCH RCP	4
701.9903	REATTACH OIL/WATER SEPARATOR TO OUTLET PIPE	4
702.0204	<b>** ITEM DELETED **</b>	4
702.0517	FRAME AND GRATE, STANDARD 6.3.2	4
702.9901	FURNISH AND INSTALL DRAINAGE GRATE R.I. STD 6.3.4	4
702.9902	<b>ATTACH FRAME AND GRATE OR FRAME AND COVER TO DRAINAGE STRUCTURE</b>	4
708.9040	CLEANING AND FLUSHING PIPE ALL SIZES	5
708.9041	CLEANING CATCH BASINS ALL TYPES AND SIZES	7
708.9042	CLEANING MANHOLES ALL TYPES AND SIZES	9
708.9902	CLEAN STORMWATER TREATMENT SYSTEM - VORTECHS MODEL 2000	10
708.9903	<b>CLEAN STORMWATER TREATMENT SYSTEM - VORTECHS MODEL 3000</b>	10
708.9904	CLEAN STORMWATER TREATMENT SYSTEM - VORTECHS MODEL 4000	11
708.9905	<b>CLEAN STORMWATER TREATMENT SYSTEM - VORTECHS MODEL 5000</b>	11
708.9906	CLEAN STORMWATER TREATMENT SYSTEM - VORTECHS MODEL 7000	12
708.9907	CLEAN STORMWATER TREATMENT SYSTEM - VORTECHS MODEL 9000	12
708.9908	CLEAN STORMWATER TREATMENT SYSTEM - VORTECHS MODEL 11000	12
708.9909	CLEAN STORMWATER TREATMENT SYSTEM - VORTECHS MODEL 16000	13
708.9910	CLEAN STORMWATER TREATMENT SYSTEM - STORMCEPTOR 450I	13
708.9912	CLEAN STORMWATER TREATMENT SYSTEM - STORMCEPTOR 1200	13
708.9914	CLEAN STORMWATER TREATMENT SYSTEM - STORMCEPTOR 3600	13
708.9917	CLEAN STORMWATER TREATMENT SYSTEM - AQUA-SWIRL (8 FT DIAMETER)	14
708.9918	CLEAN STORMWATER TREATMENT SYSTEM - AQUA-SWIRL (9 FT DIAMETER)	14
708.9919	CLEAN STORMWATER TREATMENT SYSTEM - AQUA-FILTER FILTRATION CHAMBER	14
708.9920	CLEAN STORMWATER TREATMENT SYSTEM - VORTECHS MODEL 19000	14
708.9921	CLEAN OIL/WATER SEPARATOR	14
708.9922	<b>CLEAN STORMWATER TREATMENT SYSTEM - DOWNSTREAM DEFENDER (6 FT DIAMETER)</b>	15
708.9924	CLEAR TRASH RACKS	15
708.9925	CLEAN STORMWATER TREATMENT SYSTEM - STORMCEPTOR 2400	15
903.0206	CHAIN LINK FENCE 6' STD 31.2.0	15
914.5010	FLAGPERSONS	15
914.5020	FLAGPERSONS - OVERTIME	16
920.0055	PLACED STONE RIPRAP R-3, R-4, R-5 STANDARD 8.3.0	16
920.0140	BEDDING FOR RIPRAP FS-3 STANDARD 8.3.0	16
920.0200	<b>FILTER FABRIC FOR RIP-RAP</b>	16
920.9901	<b>GEOMEMBRANE FOR RIPRAP</b>	17
922.0100	TEMPORARY CONSTRUCTION SIGNS STANDARD 29.1.0 AND 27.1.1	17
923.0200	FLUORESCENT TRAFFIC CONES STANDARD 26.1.0	17

**Table of Contents - Distribution of Quantities**

Project Name - Statewide Stormdrain Retrofit Project - BMP Monitoring  
 Estimate Name - Addendum No. 3  
 R.I. Contract No. - 2010-CH-020  
 FAP Nos: STP-SDRP(008)

<u>ItemCode</u>	<u>Description</u>	<u>Page</u>
924.0113	ADVANCE WARNING ARROW PANEL	17
928.0800	TRUCK MOUNTED ATTENUATOR WITH TRUCK MOUNTED FLASHING ARROW BOARD	17
932.0200	FULL-DEPTH SAWCUT OF BITUMINOUS PAVEMENT	18
936.0110	MOBILIZATION	18
937.0200	MAINTENANCE AND MOVEMENT TRAFFIC PROTECTION	18
943.0100	TRAINEE MAN-HOURS	18
L02.0101	GENERAL HIGHWAY SEEDING (TYPE 1)	18
204.0100	TRIMMING AND FINE GRADING	19
704.0200	RECONSTRUCT MANHOLE/CORBEL CONES	19
L01.0104	PLANTABLE SOIL 4 INCHES DEEP	19

**Distribution of Quantities**

Project Name - Statewide Stormdrain Retrofit Project - BMP Monitoring  
 Estimate Name - Addendum No. 3  
 R.I. Contract No. - 2010-CH-020  
 FAP Nos: STP-SDRP(008)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
001	201.0409	REMOVE AND DISPOSE FLEXIBLE PAVEMENT NARRAGANSETT	SY			
		BMP_OT_059		2.00	0037	01
				<b>Item 201.0409 Total:</b>		<b>2.00</b>
<hr/>						
003	201.0419	REMOVE AND DISPOSE FENCE PROVIDENCE	LF			
		BMP_WB_087		40.00	0037	01
				<b>Item 201.0419 Total:</b>		<b>40.00</b>
<hr/>						
004	201.0428	REMOVE AND DISPOSE FRAME AND GRATE OR FRAME AND COVER NARRAGANSETT	EACH			
		BMP_OT_059		1.00	0037	01
				<b>Item 201.0428 Total:</b>		<b>1.00</b>
<hr/>						
005	201.9902	REMOVE AND DISPOSE CATCH BASIN FILTER NARRAGANSETT	EACH			
		BMP_OT_058		1.00	0037	01
		BMP_OT_059		1.00	0037	01
		BMP_OT_060		1.00	0037	01
		BMP_OT_061		1.00	0037	01
		BMP_OT_062		2.00	0037	01
		BMP_OT_063		1.00	0037	01
		BMP_OT_064		1.00	0037	01
		BMP_OT_066		1.00	0037	01

### Distribution of Quantities

Project Name - Statewide Stormdrain Retrofit Project - BMP Monitoring  
 Estimate Name - Addendum No. 3  
 R.I. Contract No. - 2010-CH-020  
 FAP Nos: STP-SDRP(008)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
005	201.9902 Cont.	BMP_OT_067		1.00	0037	01
		BMP_OT_068		1.00	0037	01
		BMP_OT_070		1.00	0037	01
		BMP_OT_071		1.00	0037	01
		BMP_OT_121		1.00	0037	01
Item 201.9902 Total:				14.00		
006	201.9903	REMOVE AND DISPOSE DRAINAGE GRATE	EACH			
		JAMESTOWN				
		BMP_SC_080		1.00	0037	01
Item 201.9903 Total:				1.00		
007	201.9904	REMOVE VEGETATION	SY			
		CRANSTON				
		BMP_SC_046		610.00	0037	01
		PROVIDENCE				
		BMP_SC_085/086		370.00	0037	01
		BMP_WB_087		90.00	0037	01
		WARWICK				
		BMP_WB_015		1,035.00	0037	01
		BMP_WB_104		280.00	0037	01
Item 201.9904 Total:				2,385.00		
008	202.0100	EARTH EXCAVATION	CY			
		WARWICK				
		BMP_WB_015		20.00	0037	01
Item 202.0100 Total:				20.00		
009	202.0700	COMMON BORROW	CY			
		CRANSTON				
		BMP_SC_120		1.00	0037	01
		WARWICK				
		BMP_WB_015		40.00	0037	01

**Distribution of Quantities**

Project Name - Statewide Stormdrain Retrofit Project - BMP Monitoring  
 Estimate Name - Addendum No. 3  
 R.I. Contract No. - 2010-CH-020  
 FAP Nos: STP-SDRP(008)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
009	202.0700	Cont.				
Item 202.0700 Total:				41.00		

## Distribution of Quantities

Project Name - Statewide Stormdrain Retrofit Project - BMP Monitoring  
 Estimate Name - Addendum No. 3  
 R.I. Contract No. - 2010-CH-020  
 FAP Nos: STP-SDRP(008)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
015	701.9902	CATCH BASIN HOOD FOR 18-INCH RCP LINCOLN	EACH			
		BMP_WB_101		1.00	0037	01
				Item 701.9902 Total:		1.00
016	701.9903	REATTACH OIL/WATER SEPARATOR TO OUTLET PIPE NEWPORT	EACH			
		BMP_OS_092		1.00	0037	01
				Item 701.9903 Total:		1.00
018	702.0517	FRAME AND GRATE, STANDARD 6.3.2 NARRAGANSETT	EACH			
		BMP_OT_059		1.00	0037	01
				Item 702.0517 Total:		1.00
019	702.9901	FURNISH AND INSTALL DRAINAGE GRATE R.I. STD 6.3.4 JAMESTOWN	EACH			
		BMP_SC_080		1.00	0037	01
				Item 702.9901 Total:		1.00
020	702.9902	ATTACH FRAME AND GRATE OR FRAME AND COVER TO DRAINAGE STRUCTURE CRANSTON	EACH			
		BMP_SC_020		1.00	0037	01
		BMP_SC_120		1.00	0037	01
		LINCOLN				

**Distribution of Quantities**

Project Name - Statewide Stormdrain Retrofit Project - BMP Monitoring

Estimate Name - Addendum No. 3

R.I. Contract No. - 2010-CH-020

FAP Nos: STP-SDRP(008)

<u>Item</u> <u>No.</u>	<u>Item Code</u>	<u>Description</u>	<u>UM</u>	<u>Qty.</u>	<u>Pay</u> <u>Code</u>	<u>Seq.</u> <u>No.</u>
020	702.9902 Cont.	BMP_SC_008		4.00	0037	01
		BMP_SC_035		2.00	0037	01

**Distribution of Quantities**

Project Name - Statewide Stormdrain Retrofit Project - BMP Monitoring  
 Estimate Name - Addendum No. 3  
 R.I. Contract No. - 2010-CH-020  
 FAP Nos: STP-SDRP(008)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
020	702.9902 Cont.	BMP_SC_040		1.00	0037	01
		NORTH PROVIDENCE				
		BMP_SC_009		2.00	0037	01
		PROVIDENCE				
		BMP_SC_085		2.00	0037	01
				<b>Item 702.9902 Total:</b>		<b>13.00</b>
021	708.9040	CLEANING AND FLUSHING PIPE ALL SIZES	LF			
		CHARLESTOWN				
		BMP_SC_081		6.00	0037	01
		COVENTRY				
		BMP_SC_016		52.00	0037	01
		BMP_SC_017		3.00	0037	01
		CRANSTON				
		BMP_SC_020		17.00	0037	01
		BMP_SC_046		91.00	0037	01
		BMP_SC_047		57.00	0037	01
		BMP_SC_120		30.00	0037	01
		EXETER				
		BMP_SC_055		27.00	0037	01
		FOSTER				
		BMP_SC_027		2.00	0037	01
		BMP_SC_028		5.00	0037	01
		JAMESTOWN				
		BMP_SC_077		419.00	0037	01
		BMP_SC_078		101.00	0037	01
		BMP_SC_079		138.00	0037	01
		BMP_SC_080		57.00	0037	01
		JOHNSTON				
		BMP_SC_010		38.00	0037	01
		BMP_SC_021		291.00	0037	01
		BMP_SC_024		436.00	0037	01

**Distribution of Quantities**

Project Name - Statewide Stormdrain Retrofit Project - BMP Monitoring

Estimate Name - Addendum No. 3

R.I. Contract No. - 2010-CH-020

FAP Nos: STP-SDRP(008)

<u>Item</u> <u>No.</u>	<u>Item Code</u>	<u>Description</u>	<u>UM</u>	<u>Qty.</u>	<u>Pay</u> <u>Code</u>	<u>Seq.</u> <u>No.</u>
021	708.9040 Cont.	LINCOLN				
		BMP_SC_007		8.00	0037	01

**Distribution of Quantities**

Project Name - Statewide Stormdrain Retrofit Project - BMP Monitoring  
 Estimate Name - Addendum No. 3  
 R.I. Contract No. - 2010-CH-020  
 FAP Nos: STP-SDRP(008)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
023	708.9042 Cont.	BMP_SC_095		2.00	0037	01
		BMP_SC_097		1.00	0037	01
		BMP_SC_109		2.00	0037	01
		SOUTH KINGSTOWN				
		BMP_OS_075		3.00	0037	01
		BMP_SC_044		1.00	0037	01
		TIVERTON				
		BMP_SC_003		2.00	0037	01
		WARREN				
		BMP_SC_043		2.00	0037	01
		WARWICK				
		BMP_SC_001		1.00	0037	01
		BMP_SC_045		1.00	0037	01
		BMP_SC_082		1.00	0037	01
		BMP_SC_084		1.00	0037	01
		BMP_SC_118		2.00	0037	01
		BMP_SC_119		3.00	0037	01
		WESTERLY				
		BMP_SC_004		1.00	0037	01
				<b>Item 708.9042 Total:</b>		<b>62.00</b>
024	708.9902	CLEAN STORMWATER TREATMENT SYSTEM	EACH			
		- VORTECHS MODEL 2000				
		LINCOLN				
		BMP_SC_007		1.00	0037	01
		WARWICK				
		BMP_SC_001		1.00	0037	01
				<b>Item 708.9902 Total:</b>		<b>2.00</b>
025	708.9903	CLEAN STORMWATER TREATMENT SYSTEM	EACH			
		- VORTECHS MODEL 3000				
		FOSTER				
		BMP_SC_026		1.00	0037	01

**Distribution of Quantities**

Project Name - Statewide Stormdrain Retrofit Project - BMP Monitoring

Estimate Name - Addendum No. 3

R.I. Contract No. - 2010-CH-020

FAP Nos: STP-SDRP(008)

<u>Item No.</u>	<u>Item Code</u>	<u>Description</u>	<u>UM</u>	<u>Qty.</u>	<u>Pay Code</u>	<u>Seq. No.</u>
025	708.9903 Cont.	LINCOLN BMP_SC_035		1.00	0037	01

## Distribution of Quantities

Project Name - Statewide Stormdrain Retrofit Project - BMP Monitoring  
 Estimate Name - Addendum No. 3  
 R.I. Contract No. - 2010-CH-020  
 FAP Nos: STP-SDRP(008)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
025	708.9903 Cont.	BMP_SC_036		1.00	0037	01
		BMP_SC_037		1.00	0037	01
		NORTH PROVIDENCE				
		BMP_SC_072		1.00	0037	01
		PROVIDENCE				
		BMP_SC_089		1.00	0037	01
				<b>Item 708.9903 Total:</b>		<b>6.00</b>
026	708.9904	CLEAN STORMWATER TREATMENT SYSTEM	EACH			
		- VORTECHS MODEL 4000				
		FOSTER				
		BMP_SC_027		1.00	0037	01
		BMP_SC_028		1.00	0037	01
		JOHNSTON				
		BMP_SC_021		1.00	0037	01
		LINCOLN				
		BMP_SC_008		1.00	0037	01
		PROVIDENCE				
		BMP_SC_085		1.00	0037	01
		BMP_SC_094		1.00	0037	01
		BMP_SC_095		1.00	0037	01
				<b>Item 708.9904 Total:</b>		<b>7.00</b>
027	708.9905	CLEAN STORMWATER TREATMENT SYSTEM	EACH			
		- VORTECHS MODEL 5000				
		CHARLESTOWN				
		BMP_SC_081		1.00	0037	01
		LINCOLN				
		BMP_SC_040		1.00	0037	01
		PROVIDENCE				
		BMP_SC_086		1.00	0037	01

### Distribution of Quantities

Project Name - Statewide Stormdrain Retrofit Project - BMP Monitoring  
 Estimate Name - Addendum No. 3  
 R.I. Contract No. - 2010-CH-020  
 FAP Nos: STP-SDRP(008)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
027	708.9905	Cont. WARWICK				
		BMP_SC_082		1.00	0037	01
		BMP_SC_118		1.00	0037	01
Item 708.9905 Total:				5.00		
028	708.9906	CLEAN STORMWATER TREATMENT SYSTEM	EACH			
		- VORTECHS MODEL 7000				
		LINCOLN				
		BMP_SC_041		1.00	0037	01
		NORTH PROVIDENCE				
		BMP_SC_009		1.00	0037	01
Item 708.9906 Total:				2.00		
029	708.9907	CLEAN STORMWATER TREATMENT SYSTEM	EACH			
		- VORTECHS MODEL 9000				
		CRANSTON				
		BMP_SC_020		1.00	0037	01
		PROVIDENCE				
		BMP_SC_109		1.00	0037	01
		TIVERTON				
		BMP_SC_003		1.00	0037	01
		WARREN				
		BMP_SC_043		1.00	0037	01
		WARWICK				
		BMP_SC_084		1.00	0037	01
		BMP_SC_119		1.00	0037	01
		WESTERLY				
		BMP_SC_004		1.00	0037	01
Item 708.9907 Total:				7.00		
030	708.9908	CLEAN STORMWATER TREATMENT SYSTEM	EACH			
		- VORTECHS MODEL 11000				
		LINCOLN				

## Distribution of Quantities

Project Name - Statewide Stormdrain Retrofit Project - BMP Monitoring  
 Estimate Name - Addendum No. 3  
 R.I. Contract No. - 2010-CH-020  
 FAP Nos: STP-SDRP(008)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
039	708.9921 Cont.	BMP_OS_093		1.00	0037	01
		SOUTH KINGSTOWN				
		BMP_OS_075		1.00	0037	01
Item 708.9921 Total:				5.00		
040	708.9922	CLEAN STORMWATER TREATMENT SYSTEM	EACH			
		- DOWNSTREAM DEFENDER (6 FT DIAMETER)				
		EXETER				
		BMP_SC_055		1.00	0037	01
		JOHNSTON				
		BMP_SC_010		1.00	0037	01
		SMITHFIELD				
		BMP_SC_011		1.00	0037	01
Item 708.9922 Total:				3.00		
041	708.9924	CLEAR TRASH RACKS	LS			
		WARWICK				
		BMP_WB_015		1.00	0037	01
Item 708.9924 Total:				1.00		
042	708.9925	CLEAN STORMWATER TREATMENT SYSTEM	EACH			
		- STORMCEPTOR 2400				
		JAMESTOWN				
		BMP_SC_078		1.00	0037	01
		BMP_SC_079		1.00	0037	01
Item 708.9925 Total:				2.00		
043	903.0206	CHAIN LINK FENCE 6' STD 31.2.0	LF			
		PROVIDENCE				
		BMP_WB_087		40.00	0037	01
Item 903.0206 Total:				40.00		

**Distribution of Quantities**

Project Name - Statewide Stormdrain Retrofit Project - BMP Monitoring

Estimate Name - Addendum No. 3

R.I. Contract No. - 2010-CH-020

FAP Nos: STP-SDRP(008)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
044	914.5010	FLAGPERSONS	MHRS			
		MAINTENANCE AND PROTECTION OF				

## Distribution of Quantities

Project Name - Statewide Stormdrain Retrofit Project - BMP Monitoring  
 Estimate Name - Addendum No. 3  
 R.I. Contract No. - 2010-CH-020  
 FAP Nos: STP-SDRP(008)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
044	914.5010 Cont.	TRAFFIC				
		AS REQUIRED		800.00	0037	01
				<b>Item 914.5010 Total:</b>		<b>800.00</b>
045	914.5020	FLAGPERSONS - OVERTIME	MHRS			
		MAINTENANCE AND PROTECTION OF TRAFFIC				
		AS REQUIRED		80.00	0037	01
				<b>Item 914.5020 Total:</b>		<b>80.00</b>
046	920.0055	PLACED STONE RIPRAP R-3, R-4, R-5	SY			
		STANDARD 8.3.0				
		PROVIDENCE				
		BMP_WB_087		3.00	0037	01
		WARWICK				
		BMP_SC_083		7.00	0037	01
		BMP_WB_013		89.00	0037	01
		BMP_WB_015		92.00	0037	01
		BMP_WB_104		165.00	0037	01
				<b>Item 920.0055 Total:</b>		<b>356.00</b>
047	920.0140	BEDDING FOR RIPRAP FS-3 STANDARD	SY			
		8.3.0				
		PROVIDENCE				
		BMP_WB_087		3.00	0037	01
		WARWICK				
		BMP_SC_083		7.00	0037	01
		BMP_WB_013		89.00	0037	01
		BMP_WB_015		89.00	0037	01
		BMP_WB_104		165.00	0037	01
				<b>Item 920.0140 Total:</b>		<b>353.00</b>
048	920.0200	FILTER FABRIC FOR RIP-RAP	SY			

### Distribution of Quantities

Project Name - Statewide Stormdrain Retrofit Project - BMP Monitoring  
 Estimate Name - Addendum No. 3  
 R.I. Contract No. - 2010-CH-020  
 FAP Nos: STP-SDRP(008)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
048	920.0200 Cont.	PROVIDENCE				
		BMP_WB_087		3.00	0037	01
		WARWICK				
		BMP_SC_083		7.00	0037	01
		BMP_WB_013		89.00	0037	01
		BMP_WB_015		89.00	0037	01
		BMP_WB_104		165.00	0037	01
<b>Item 920.0200 Total:</b>				<b>353.00</b>		

## Distribution of Quantities

Project Name - Statewide Stormdrain Retrofit Project - BMP Monitoring  
 Estimate Name - Addendum No. 3  
 R.I. Contract No. - 2010-CH-020  
 FAP Nos: STP-SDRP(008)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
049	920.9901	GEOMEMBRANE FOR RIPRAP	EACH			
		PROVIDENCE				
		BMP_WB_087		3.00	0037	01
		WARWICK				
		BMP_SC_083		7.00	0037	01
		BMP_WB_013		89.00	0037	01
		BMP_WB_015		89.00	0037	01
		BMP_WB_104		165.00	0037	01
Item 920.9901 Total:				353.00		
050	922.0100	TEMPORARY CONSTRUCTION SIGNS	SF			
		STANDARD 29.1.0 AND 27.1.1				
		MAINTENANCE AND PROTECTION OF				
		TRAFFIC				
		AS REQUIRED		400.00	0037	01
Item 922.0100 Total:				400.00		
051	923.0200	FLUORESCENT TRAFFIC CONES STANDARD	EACH			
		26.1.0				
		MAINTENANCE AND PROTECTION OF				
		TRAFFIC				
		AS REQUIRED		256.00	0037	01
Item 923.0200 Total:				256.00		
052	924.0113	ADVANCE WARNING ARROW PANEL	PDAY			
		MAINTENANCE AND PROTECTION OF				
		TRAFFIC				
		AS REQUIRED		12.00	0037	01
Item 924.0113 Total:				12.00		
053	928.0800	TRUCK MOUNTED ATTENUATOR WITH	PDAY			
		TRUCK MOUNTED FLASHING ARROW BOARD				
		MAINTENANCE AND PROTECTION OF				

**Distribution of Quantities**

Project Name - Statewide Stormdrain Retrofit Project - BMP Monitoring  
 Estimate Name - Addendum No. 3  
 R.I. Contract No. - 2010-CH-020  
 FAP Nos: STP-SDRP(008)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
053	928.0800 Cont.	TRAFFIC				
		AS REQUIRED		13.00	0037	01
<b>Item 928.0800 Total:</b>				<b>13.00</b>		

### Distribution of Quantities

Project Name - Statewide Stormdrain Retrofit Project - BMP Monitoring  
 Estimate Name - Addendum No. 3  
 R.I. Contract No. - 2010-CH-020  
 FAP Nos: STP-SDRP(008)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
054	932.0200	FULL-DEPTH SAWCUT OF BITUMINOUS PAVEMENT NARAGANSETT	LF			
		BMP_OT_059		16.00	0037	01
				Item 932.0200 Total:		16.00
055	936.0110	MOBILIZATION BMP MONITORING AS REQUIRED	LS			
				1.00	0037	01
				Item 936.0110 Total:		1.00
056	937.0200	MAINTENANCE AND MOVEMENT TRAFFIC PROTECTION MAINTENANCE AND PROTECTION OF TRAFFIC	LS			
		AS DIRECTED BY ENGINEER		1.00	0037	01
				Item 937.0200 Total:		1.00
057	943.0100	TRAINEE MAN-HOURS BMP MONITORING AS REQUIRED	MNHR			
				1,000.00	0037	01
				Item 943.0100 Total:		1,000.00
058	L02.0101	GENERAL HIGHWAY SEEDING (TYPE 1) CRANSTON	SY			
		BMP_SC_020		3.00	0037	01
		BMP_SC_046		610.00	0037	01
		FOSTER				
		BMP_SC_026		2.00	0037	01
		PROVIDENCE				
		BMP_SC_085/086		370.00	0037	01
		BMP_WB_087		90.00	0037	01
		WARWICK				

### Distribution of Quantities

Project Name - Statewide Stormdrain Retrofit Project - BMP Monitoring  
 Estimate Name - Addendum No. 3  
 R.I. Contract No. - 2010-CH-020  
 FAP Nos: STP-SDRP(008)

Item No.	Item Code	Description	UM	Qty.	Pay Code	Seq. No.
058	L02.0101 Cont.	BMP_WB_015		1,020.00	0037	01
		BMP_WB_104		280.00	0037	01
Item L02.0101 Total:				2,375.00		
059	204.0100	TRIMMING AND FINE GRADING	SY			
		CRANSTON				
		BMP_SC_020		3.00	0037	01
		FOSTER				
		BMP_SC_026		2.00	0037	01
		Z: MISCELLANEOUS				
		AS REQUIRED		10.00	0037	01
Item 204.0100 Total:				15.00		
060	704.0200	RECONSTRUCT MANHOLE/CORBEL CONES	EACH			
		FOSTER				
		BMP_SC_027		2.00	0037	01
Item 704.0200 Total:				2.00		
061	L01.0104	PLANTABLE SOIL 4 INCHES DEEP	SY			
		CRANSTON				
		BMP_SC_020		3.00	0037	01
		FOSTER				
		BMP_SC_026		2.00	0037	01
		Z: MISCELLANEOUS				
		AS REQUIRED		10.00	0037	01
Item L01.0104 Total:				15.00		