

# Request for Quote

STATE OF RHODE ISLAND AND PROVIDENCE PLANTATIONS  
 ONE CAPITOL HILL  
 PROVIDENCE RI 02908

BUYER: Cowell Jr, John A  
 PHONE #: 401-574-8114

**B  
I  
L  
L  
T  
O**  
 DHS-ORS SERVICES FOR THE BLIND  
 40 FOUNTAIN ST, 3RD FLOOR  
 PROVIDENCE, RI 02903-1898  
 US

CREATION DATE : 03-SEP-14  
 BID NUMBER: 7548988  
 TITLE: COMMERCIAL RESTAURANT EQUIPMENT - DHS  
 BID CLOSING DATE AND TIME: 25-SEP-2014 11:30:00

**S  
H  
I  
P  
T  
O**  
 DOA CONTROLLER  
 ONE CAPITOL HILL, 4TH FLOOR  
 SMITH ST  
 PROVIDENCE, RI 02908  
 US

Requisition Number: 1377277

Line	Description	Quantity	Unit	Unit Price	Total
1	PRICE QUOTE MUST INCLUDE: FREIGHT, DELIVERY UNCRATE, SET IN PLACE AND WARRANTY NEW ONLY-NO USED OR REFURBISHED NO EQUALS/NO SUBSTITUTIONS FEDERAL BRAND REFRIGERATED SELF SERVE MERCHANDISER-MODEL LPRSS3-BLACK WITH RECESSED CASTERS & SOLD REAR SLIDING ACCESS DOORS WITH WARRANTY; SUPPLY, DELIVER, UNCRATE, SET IN PLACE	1.00	Each		
2	VULCAN 48 INCH ELECTRIC RANGE - MODEL EV48-S-4FP-24G-208; WITH CASTERS AND EXTRA OVEN RACK WITH WARRANTY SUPPLY, DELIVER, UNCRATE, SET IN PLACE DELIVER TO: PROVIDENCE, RI COFFEE PLUS 68 URI SHEPARD BLDG 80 WASHINGTON STREET PROVIDENCE, RI 02903	1.00	Each		

Delivery: \_\_\_\_\_

Terms of Payment: \_\_\_\_\_

It is the Vendor's responsibility to check and download any and all addenda from the RIVIP. This offer may not be considered unless a signed RIVIP generated Bidder Certification Cover Form is attached and the Unit Price column is completed. The signed Certification Cover Form must be attached to the front of the offer



a Standex company

ITEM: \_\_\_\_\_ PROJECT NAME: \_\_\_\_\_ DATE: \_\_\_\_\_


## REFRIGERATED SELF-SERVE LOW PROFILE SPECIALTY MERCHANDISER

MODEL  LPRSS3

LPRSS4

LPRSS5

LPRSS6

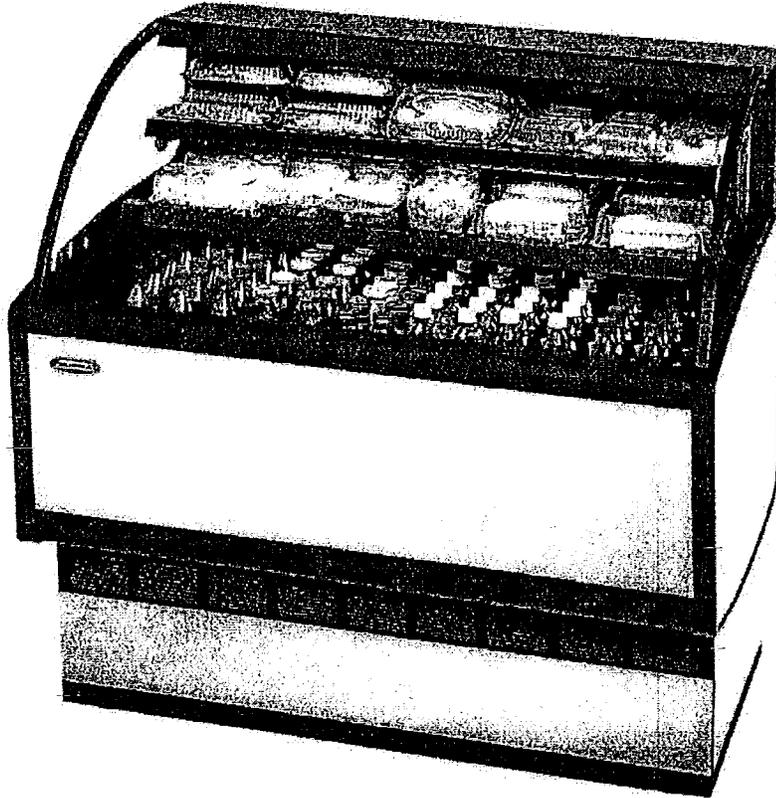

*Maximize your display potential with Federal's low-profile, refrigerated self-serve merchandiser. Bring product to the customer for increased sales with the reduced labor of a self-serve display case. Available in lengths of 3', 4', 5', and 6'.*


### STANDARD FEATURES

- Steel base construction with choice of six standard laminates on exterior. Other finishes optional.
- Black trim.
- Two tiers adjustable solid black metal shelves.
- Stainless steel display deck and black interior ends and back panel. Glass end panels.
- Horizontal top light. Undershelf lights are optional.
- On-demand PTC condensate evaporator provided for a totally self-contained system. A condensate pump is required on the LPRSS5 and LPRSS6 and remote cases.
- Easily cleaned, rustproof, insulated evaporator coil compartment.
- Insulated with high-density foam.
- Rear access to the refrigeration system for quick easy service.
- Easily accessible light switch, power switch, and adjustable temperature control.
- Energy-saving night curtain.
- Electronic temperature control maintains 38° to 40°F with on-demand defrost.
- R404 Refrigerant.
- Thermometer provided.
- Adjustable feet.
- Continuous line-ups are available for remote applications.
- Cord and plug.
- UL Safety and UL Sanitation listed.
- DOE 2012 Compliant.


# REFRIGERATED SELF-SERVE LOW PROFILE SPECIALTY MERCHANDISER

## OPTIONAL ACCESSORIES:


- Special Base Finish
- Lights Below Shelves
- LED Lighting
- Casters: Recessed or Exposed
- Legs
- Remote Refrigeration
- Solid Rear Sliding Access Doors
- Two-Tier Display Step in Lieu of Shelving
- Glass or Stainless Shelving in Lieu of Black Metal
- Flush End Panels for Counter Installations
- Joining Kit for Continuous Line-ups
- Reflective End Glass
- Stainless Steel Interior, Including Shelves
- Security Night Cover
- Front Non-Refrigerated Display Merchandiser
- Front or Rear Condensing Unit Air Discharge
- Condensate Pump
- Condensate Evaporator Assembly (Field Install, Dedicated Circuit)

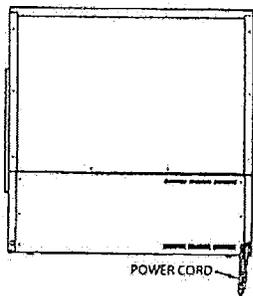


REAR VIEW

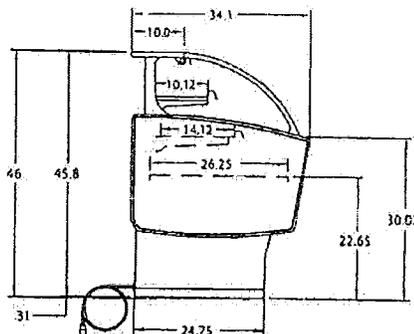

END VIEW

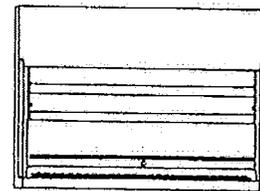

PLAN VIEW

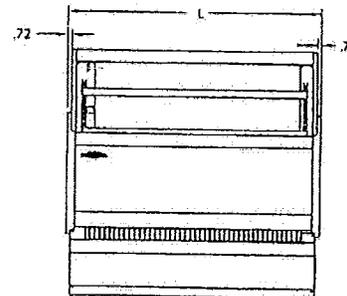

FRONT VIEW

## SPECIFICATIONS:

Model	Dimensions L W H	Shipping Weight (lbs)	Shelf Area (Square Feet)	Self-Contained with Condensate Pan 208-230/60/1	Remote with Condensate Pump 120/60/1
<input checked="" type="checkbox"/> LPRSS3	36" x 34" x 46"	457	11	120/60/1 • 1/3 HP • 16 AMPS	2 AMPS
<input type="checkbox"/> LPRSS4	48" x 34" x 46"	560	15	120/60/1 • 1/3 HP • 16 AMPS	2 AMPS
<input type="checkbox"/> LPRSS5	60" x 34" x 46"	650	19	230/60/1 • 1/2 HP • 9 AMPS	3 AMPS
<input type="checkbox"/> LPRSS6	72" x 34" x 46"	750	24	230/60/1 • 3/4 HP • 10 AMPS	3 AMPS

- Case temperature will vary if the air curtain is disrupted.
- The rear of the unit needs to be 6" from a wall.
- Refrigerated cases are designed to operate in a maximum environment of 75°F ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.



*The Signature of Quality*

**FEDERAL INDUSTRIES**  
A Standex Company

215 FEDERAL AVENUE, BELLEVILLE, WISCONSIN 53508-9201

PHONE: 800-356-4206

EMAIL: [geninfo@federalind.com](mailto:geninfo@federalind.com)

FAX: 608-424-3234


WEBSITE: [www.federalind.com](http://www.federalind.com)



**RESTAURANT RANGES**

**VULCAN**

**48" ELECTRIC RESTAURANT RANGE  
4 FRENCH PLATES / 24" GRIDDLE**

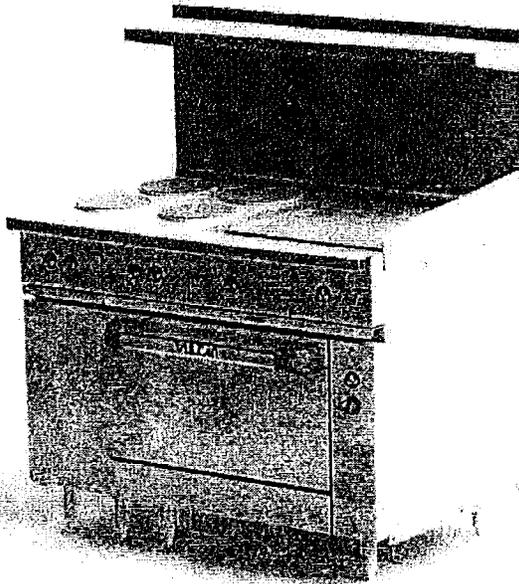

Model EV48-S-4FP-24G-208  
shown with adjustable legs

Modular range shipped in multiple cartons



**SPECIFICATIONS**

48" wide electric restaurant range, Vulcan Model No. EV48-S-4FP-24G-208. Fully MIG welded aluminized steel frame for added durability. Stainless steel front, sides, back riser, plate shelf and 6" adjustable legs. Four 9 1/2" round French plates, 2 KW input per plate. Full width pull out crumb tray located beneath the cooking top. 24" wide, 7/8" thick griddle plate, one thermostat provided for every 12" griddle width. Comes with one standard oversized oven. Oven interior measures 26 1/2"w x 26 3/8"d x 14"h. Comes with one oven rack and three rack positions. Oven door is heavy duty with an integrated door hinge/spring mechanism, requiring no adjustments. 5 KW input. Top browning heat control. Thermostat adjusts from 200°F to 500°F. Oven controls are protected from heat in an insulated side compartment. Requires 208, 240 or 480 volt, 1 or 3 phase power supply. All ranges shipped in 3 phase and are field convertible to single phase.

**Exterior Dimensions:**

34"d x 48"w x 58"h on 6" adjustable legs

- EV48-S-4FP-24G-208 4 French Plates / 24" Griddle  
Standard Oversized Oven / 208V
- EV48-S-4FP-24G-240 4 French Plates / 24" Griddle  
Standard Oversized Oven / 240V
- EV48-S-4FP-24G-480 4 French Plates / 24" Griddle  
Standard Oversized Oven / 480V

**STANDARD FEATURES**

- Fully MIG welded aluminized steel frame for added durability
- Stainless steel front, sides, back riser, shelf and legs
- Four 9 1/2" round, 2 KW French plates with infinite heat control switches. Four position heat switch on 480 volt.
- 5 KW oven with top browning control
- One standard oversized oven, interior measures 26 1/2"w x 26 3/8"d x 14"h
- Full width pull out crumb tray
- 24" wide, 7/8" thick griddle plate, one thermostat provided for every 12" griddle width
- Thermostat adjusts from 200°F to 500°F
- Cool to the touch control knobs
- One oven rack and three rack positions
- 18" x 26" sheet pans fit side to side and front to back
- Requires 208, 240 or 480 volt, 1 or 3 phase power supply (ranges shipped in 3 phase and are field convertible to single phase)
- One year limited parts and labor warranty

**ACCESSORIES (Packaged and Sold Separately)**

- Extra oven rack with two rack guides
- Set of four casters (two locking)
- 10" stainless steel stub back
- ESB36 salamander broiler
- Reinforced high shelf for ESB36 salamander broiler
- Towel bar
- Cutting board
- Condiment rail
- Fryer shield

**VULCAN**

a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602

# RESTAURANT RANGES



## 48" ELECTRIC RESTAURANT RANGE 4 FRENCH PLATES / 24" GRIDDLE


### INSTALLATION INSTRUCTIONS

Clearances from Combustible Construction      Rear      Sides

Range only	0"	0"
Range and ESB	2"	8"
Salamander Broiler	2"	8"

**Clearance Note:** Electric Ranges are 0 inches sides and 0 inches rear from combustible and non-combustible constructions except when hot top sections are incorporated.

Ranges incorporating hot top sections are 0 inches sides and 0 inches rear to non-combustibles and 6 inches sides and 6 inches rear to combustible constructions.

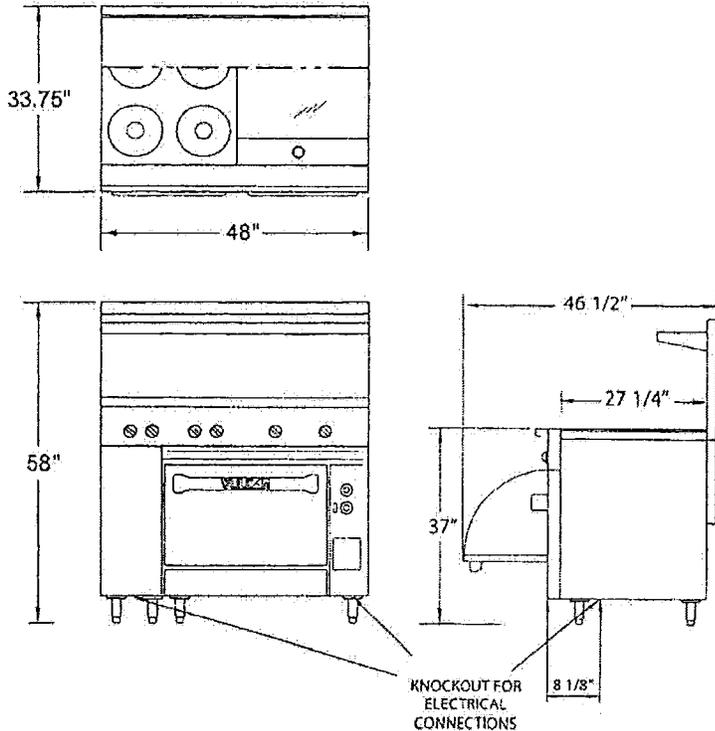

The EV 48 ranges require two separate electrical hook-ups.

AVAILABLE VOLTAGES - 208 OR 240 VOLT - 1 OR 3 PHASE																								
3 PHASE LOADING										NOMINAL AMPS PER LINE WIRE														
MODEL NUMBER	KW		KW PER PHASE							3 PHASE LT						3 PHASE RT						1 PHASE		
			LT 3 PH			RT 3 PH				208 VOLT		240 VOLT				208 VOLT			240 VOLT			LT	RT	
	LT	RT	X-Y	Y-Z	X-Z	X-Y	Y-Z	X-Z	X	Y	Z	X	Y	Z	X	Y	Z	X	Y	Z	208	240	208	240
EV48-S-4FP-24G-208	4.0	15.8	2.0	2.0	0.0	3.4	7.4	5.0	8.3	16.7	8.3	--	--	35.0	45.0	51.6	--	--	--	20.3	--	76.0	--	
EV48-S-4FP-24G-240	4.0	15.8	2.0	2.0	0.0	3.4	7.4	5.0	--	--	--	7.3	14.5	7.3	--	--	--	30.3	39.0	44.7	--	16.7	--	65.8

Note: To calculate 480 volt amps, take 240 volt amp ratings shown and divide by two.

This appliance is manufactured for commercial use only and is not intended for home use.



a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602

**Request for quote: COMMERCIAL RESTAURANT EQUIPMENT**  
**Preferred Vendor: none**

RI Services f/t Blind & Visually Impaired through the Randolph-Sheppard Blind Vending Business Enterprise Program (BEP) submits a request for quote for TWO PIECES OF COMMERCIAL RESTAURANT EQUIPMENT for its Blind Vending Facility Program:

**SPECIFICATIONS:**

- VULCAN 48 INCH ELECTRIC RANGE- MODEL EV48-S-4FP-24G-208; WITH CASTERS AND EXTRA OVEN RACK, WITH WARRANTY
- FEDERAL BRAND REFRIGERATED SELF SERVE MERCHANDISER- MODEL LPRSS3- BLACK, WITH RECESSED CASTERS & SOLD REAR SLIDING ACCESS DOORS WITH WARRANTY

**\*\*\*Price quoted must include:**

- freight, delivery, uncrate, set in place and warranty.

**\*\*\* NO EQUALS/NO SUBSTITUTIONS\*\*\***

**\*\*\*NEW ONLY – NO USED OR REFURBISHED\*\*\***

**Delivery location: Providence, RI- Coffee Plus 68 at URI SHEPARD BLDG- 80 WASHINGTON STREET PROVIDENCE, 02903**

Specification sheets attached.

Contact person for delivery post award:

**Laurie DiOrio**  
**Acting Administrator**  
**RI Services f/t Blind & Visually Impaired**  
**40 Fountain Street**  
**Providence, RI 02903**  
**401-462-7889**  
**[laurie.diorio@dhs.ri.ov](mailto:laurie.diorio@dhs.ri.ov)**

**Contract Terms and Conditions**

**Table of Contents**

Terms and Conditions.....VII  
    BID STANDARD TERMS AND CONDITIONS .....VII  
    TERMS AND CONDITIONS FOR THIS BID .....VII  
    INSURANCE REQUIREMENTS .....VII  
    VENDOR SPECIFICATIONS .....VII

**Terms and Conditions**

**BID STANDARD TERMS AND CONDITIONS**

**TERMS AND CONDITIONS FOR THIS BID**

**INSURANCE REQUIREMENTS**

AN INSURANCE CERTIFICATE IN COMPLIANCE WITH PROVISIONS OF ITEM 31 (INSURANCE) OF THE GENERAL CONDITIONS OF PURCHASE IS REQUIRED FOR COMPREHENSIVE GENERAL LIABILITY, AUTOMOBILE LIABILITY, AND WORKERS' COMPENSATION AND MUST BE SUBMITTED BY THE SUCCESSFUL BIDDER(S) TO THE DIVISION OF PURCHASES PRIOR TO AWARD. THE INSURANCE CERTIFICATE MUST NAME THE STATE OF RHODE ISLAND AS CERTIFICATE HOLDER AND AS AN ADDITIONAL INSURED. FAILURE TO COMPLY WITH THESE PROVISIONS MAY RESULT IN REJECTION OF THE OFFEROR'S BID. ANNUAL RENEWAL CERTIFICATES MUST BE SUBMITTED TO THE AGENCY IDENTIFIED ON THE PURCHASE ORDER. FAILURE TO DO SO MAY BE GROUNDS FOR CANCELLATION OF CONTRACT.

NOTE: IF THIS BID COVERS CONSTRUCTION, SCHOOL BUSING, HAZARDOUS WASTE, OR VESSEL OPERATION, APPLICABLE COVERAGES FROM THE FOLLOWING LIST MUST ALSO BE SUBMITTED TO THE DIVISION OF PURCHASES PRIOR TO AWARD: \* PROFESSIONAL LIABILITY INSURANCE (AKA ERRORS & OMISSIONS) - \$1 MILLION OR 5% OF ESTIMATED PROJECT COST, WHICHEVER IS GREATER. \* BUILDER'S RISK INSURANCE - COVERAGE EQUAL TO FACE AMOUNT OF CONTRACT FOR CONSTRUCTION. \* SCHOOL BUSING - AUTO LIABILITY COVERAGE IN THE AMOUNT OF \$5 MILLION. \* ENVIRONMENTAL IMPAIRMENT (AKA POLLUTION CONTROL) - \$1 MILLION OR 5% OF FACE AMOUNT OF CONTRACT, WHICHEVER IS GREATER. \* VESSEL OPERATION - (MARINE OR AIRCRAFT) - PROTECTION & INDEMNITY COVERAGE REQUIRED IN THE AMOUNT OF \$1 MILLION.

**VENDOR SPECIFICATIONS**

ALL VENDORS MUST INCLUDE SPECIFICATIONS WITH BID PROPOSAL (EVEN THOSE BIDDING BRAND SPECIFIED). FAILURE TO SUBMIT SPECIFICATIONS WITH BID PROPOSAL MAY RESULT IN DISQUALIFICATION OF BID. ITEMS IN CATALOGS MUST BE CLEARLY MARKED AND PAGES TABBED.